

Safety Relay HR1S-AC

Key features:

- 1NC or 2NC safety input type, such as E-Stops or Interlock Switches
- EN ISO 13849-1 PL_e, Safety Cat 3 compliant, and EN 62061 SIL 3
- Fault diagnosis function with dual safety circuits.
- Internal relay operations can be monitored with LED Indicator.
- Finger-safe protection
- 22.5mm wide, 35mm DIN rail mounting
- UL listed, CSA certified, TÜV NORD approved



Part Numbers


Part Number	Terminal Style
HR1S-AC5121	Integrated Terminal Block
HR1S-AC5121P	Removable Terminal Block

Specifications


Operating Temperature	-10 to 55°C (no freezing)	
Degree of Protection	Terminal: IP20, Housing: IP40	
Rated Power Voltage	24V AC (-20 to +10%) 50/60 Hz 24V DC (±20%)	
Power Consumption	AC: 2.2 VA (24V AC) maximum DC: 1.2W (24V DC) maximum	
Overcurrent Protection	Electronic	
Control Circuit Voltage	24V	
Performance Level (PL)	e (EN ISO 13849-1)	
Safety Category	3 (EN 954-1)	
Safety Integrity Level (SIL)	3 (EN 62061)	
Response Time	100ms maximum	
Input Synchronization Time	Unlimited	
Overvoltage Category	III	
Pollution Degree	2	
Rated Insulation Voltage	300V	
Safety Outputs	Instantaneous (Stop Cat 0)	3NO
	Auxiliary Contact	1NO (transistor, PNP)
Output Contact Ratings	Safety Circuit	AC-15 C300: U _e = 240VAC, I _e =0.75A
		DC-13 U _e =24VDC, I _e =2A
	Transistor Circuit	24V/20mA
	Minimum Applicable Load	17V/10mA (initial value)
Operation Frequency	1200 operations/h maximum	
Rated Current	Safety circuit output total: 10.5A maximum	
Wire Size	HR1S-AC5121: 1 × 2.5mm ² , 2 × 0.75mm ² maximum HR1S-AC5121P: 1 × 2.5mm ² , 2 × 1.5mm ² maximum	
Weight	160g	

Use a 4A fuse (Type gL) for power fuse protection.
Use a 4A (Type gL) or a 6A fast blow fuse for output fuse protection

Dimensions (mm)

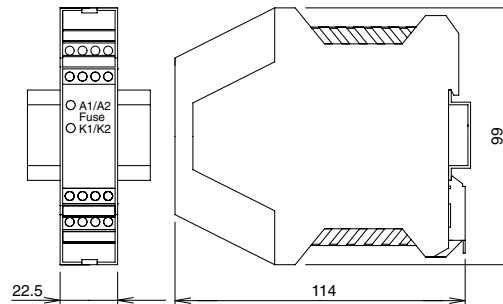


Terminal Arrangement

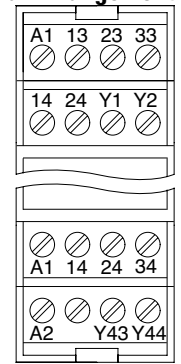

LED Indicator

- A1/A2 Fuse: Turns on when power circuit is normal. Turns off when power is interrupted or the electronic fuse blows.
- K1: Turns on when K1 relay operates.
- K2: Turns on when K2 relay operates.

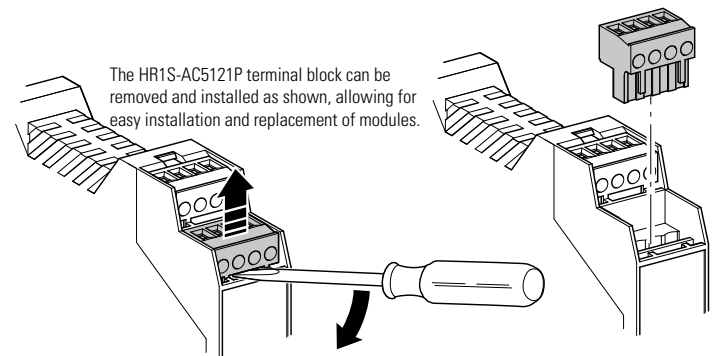

Overview

XW Series E-Stops

Interlock Switches

Enabling Switches


Safety Control

Light Curtains

AS-Interface Safety at Work

HR1S-AC Wiring Diagram
Safety Category 3 Example Circuit (using an emergency stop switch with 2NC contacts)

Overview

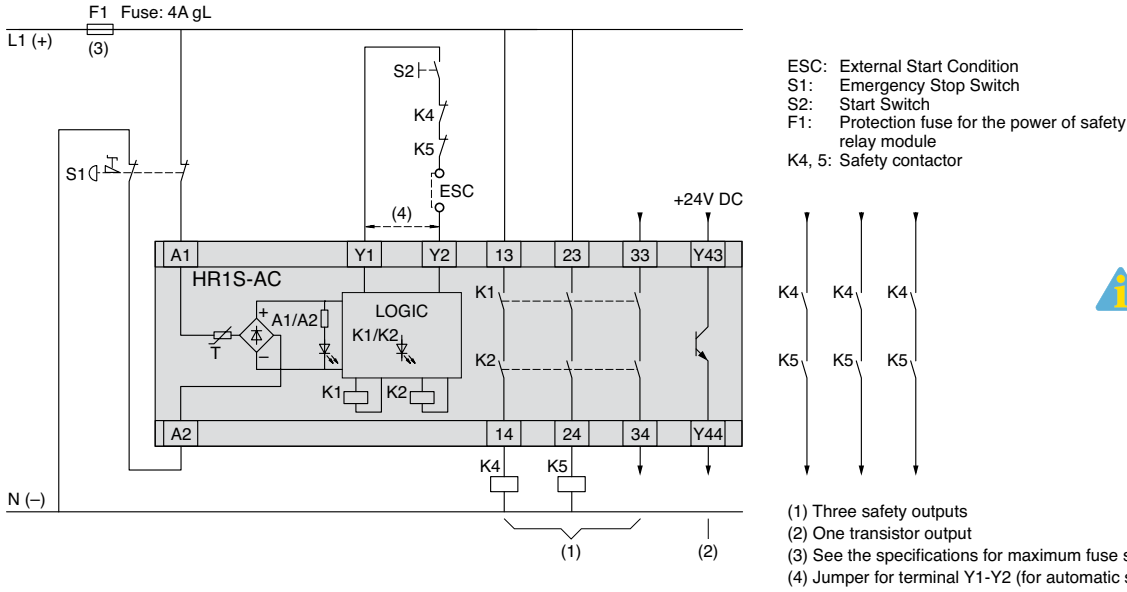


The Safety Category is achieved by the entire control system. Take any connected safety equipment and wiring into consideration.

XW Series E-Stops

Interlock Switches


Safety Category 3 Example Circuit (using an emergency stop switch with 2NC contacts)

Enabling Switches

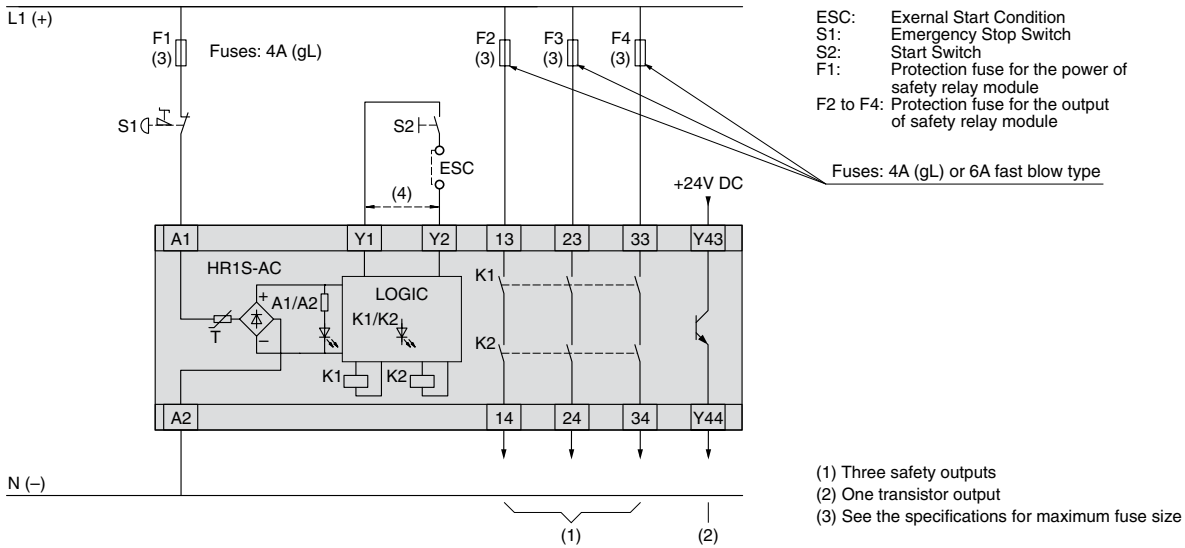

Safety Control


Output Contact Electrical Life

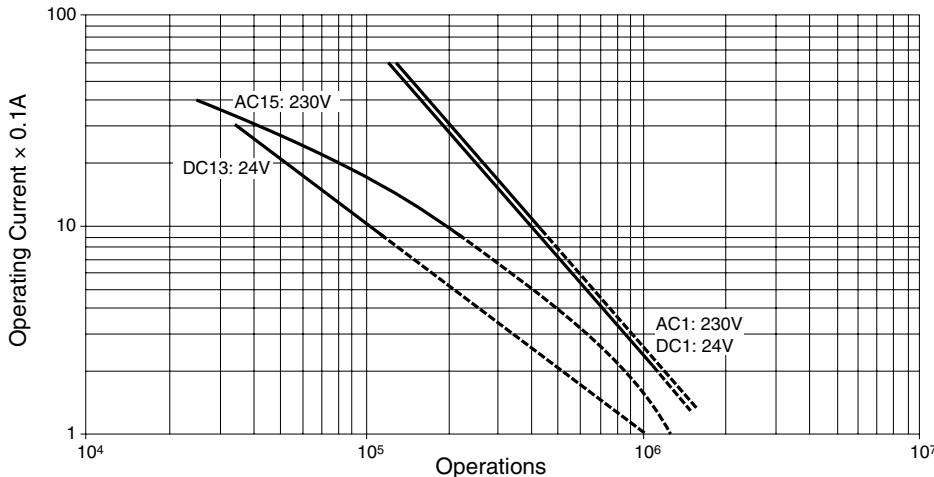


Light Curtains

AS-Interface Safety at Work

**HR1S-AC Safety Relay Module Operation Chart
When Using a Start Switch**

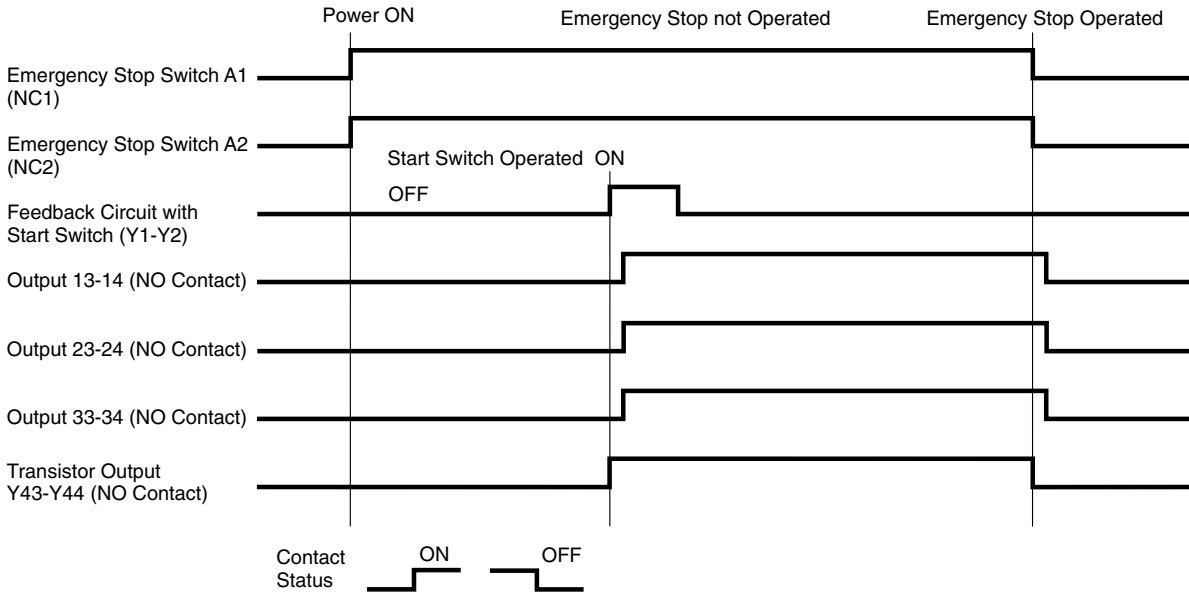

When Not Using a Start Switch

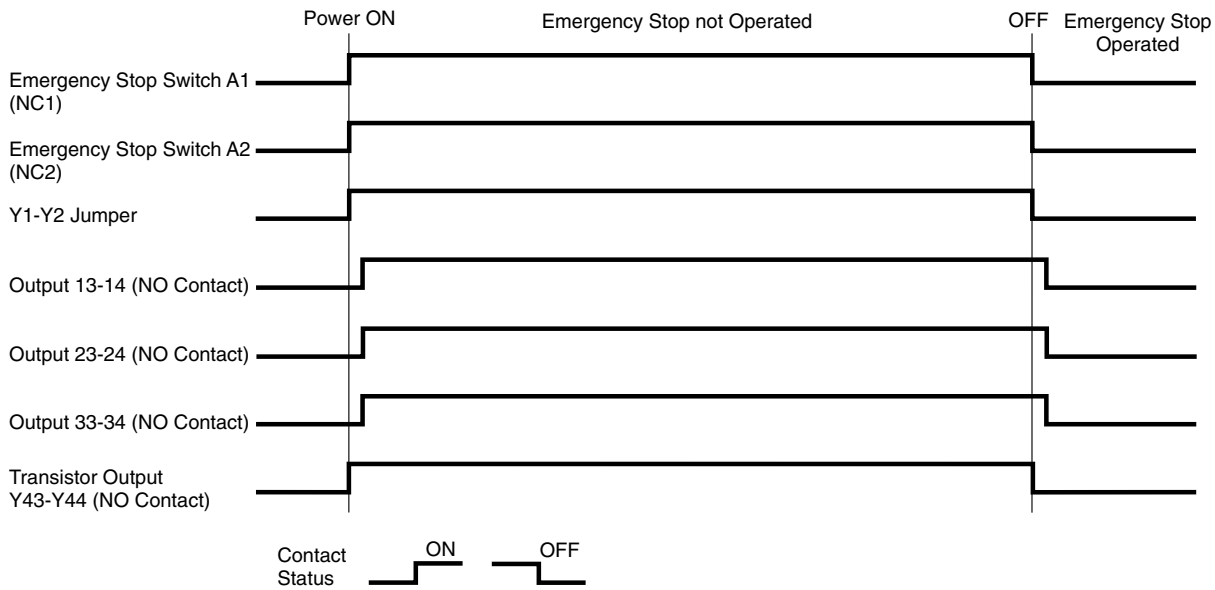

Safety Relay HR1S-AF

Key features:

- 2NC safety input type, such as E-Stops or Interlock Switches
- EN ISO 13849-1 PL_e, Safety Cat 4 compliant, and EN 62061 SIL 3
- Welding detection of start switch
- Fault diagnosis function with dual safety circuits
- Internal relay operations can be monitored with LED Indicator.
- Finger-safe protection
- 22.5mm wide, 35mm DIN rail mounting
- UL listed, CSA certified, TÜV NORD approved




Part Numbers

Part Number	Terminal Style
HR1S-AF5130B	Integrated Terminal Block
HR1S-AF5130PB	Removable Terminal Block

Specifications

Operating Temperature	-25 to +55°C (no freezing)	
Degree of Protection	Terminal: IP20, Housing: IP40	
Rated Power Voltage	24V AC (-15 to +10%) 50/60 Hz 24V DC (-15 to +10%)	
Power Consumption	5 VA maximum (24V AC) 2.5W maximum (24V DC)	
Overcurrent Protection	Electronic (Note)	
Control Circuit Voltage	24V	
Performance Level (PL)	e (EN ISO 13849-1)	
Safety Category	4 (EN ISO 13849-1)	
Safety Integrity Level (SIL)	3 (EN 62061)	
Response Time	When S11-S12, S21-S22 are interrupted: 20 ms maximum When power is interrupted: 60 ms maximum	
Input Synchronization Time	Unlimited	
Overvoltage Category	III	
Pollution Degree	2	
Rated Insulation Voltage	300V	
Safety Outputs	Instantaneous (Stop Cat 0)	3NO
Output Contact Ratings	Safety Circuit AC-15	C300: U _e = 240VAC, I _e =0.75A
	DC-13	U _e =24VDC, I _e =2A
	Minimum Applicable Load	17V/10mA (initial value)
Operation Frequency	1200 operations/h maximum	
Rated Current	Safety circuit output total: 18A maximum Each safety circuit output: 6A maximum	
Wire Size	HR1S-AF5130B: 1 × 2.5 mm ² , 2 × 0.75 mm ² maximum HR1S-AF5130PB: 1 × 2.5 mm ² , 2 × 1.5 mm ² maximum	
Weight	250g	

Dimensions (mm)

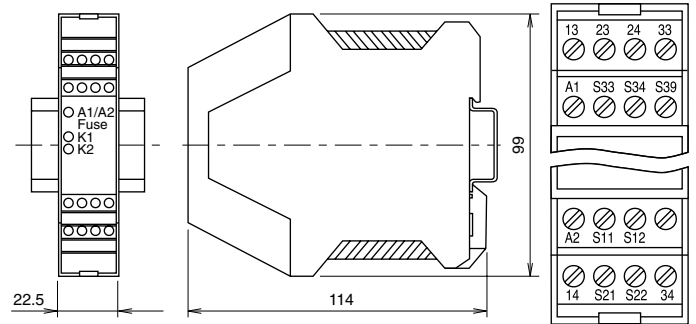


Terminal Arrangement

Note: Short-circuit of S11 and S21 activates the overcurrent protection circuit, interrupting the power supply. The safety output turns off. Normal status is restored when the short-circuit is removed. Use a 4A fuse (Type gL) for power line protection. Use a 4A fuse (Type gL) or a 6A fast blow fuse for output line protection.

LED Indicator

- A1/A2 Fuse: Turns on when power circuit is normal. Turns off when power is interrupted or the electronic fuse blows.
- K1: Turns on when K1 relay operates.
- K2: Turns on when K2 relay operates.

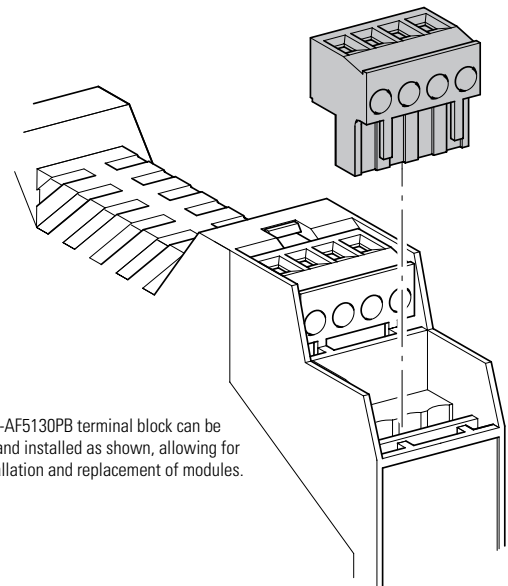

The HR1S-AF5130PB terminal block can be removed and installed as shown, allowing for easy installation and replacement of modules.

Overview

XW Series E-Stops

Interlock Switches

Enabling Switches

Safety Control


Light Curtains

AS-Interface Safety at Work

HR1S-AF Wiring Diagram
Safety Category 4 Example Circuit (using an emergency stop switch)




The Safety Category is achieved by the entire control system. Take any connected safety equipment and wiring into consideration.

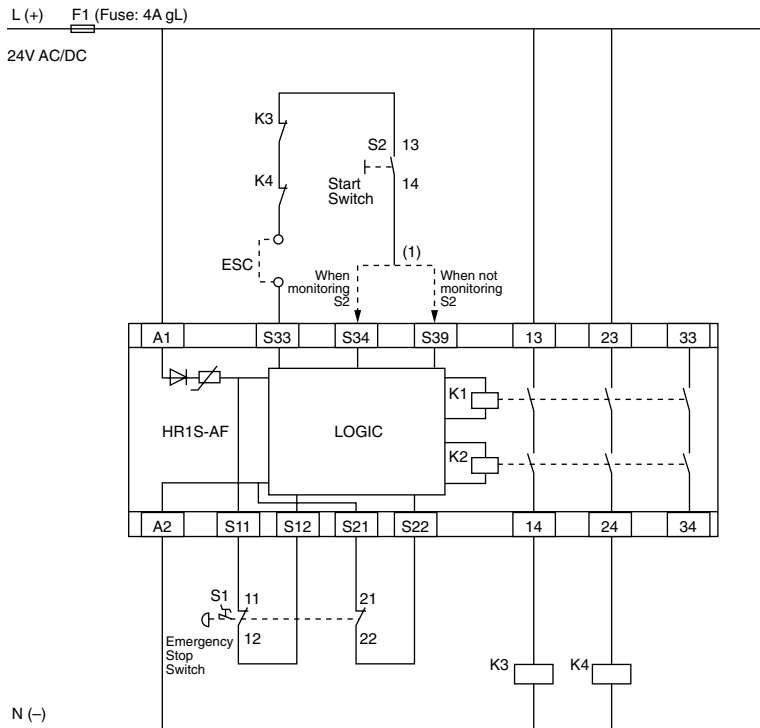


(1) = Start Switch Monitor
 ESC: External Start Condition
 F1: Protection fuse for the power of safety relay module
 K3, 4: Safety contactor


When not using a start switch (automatic start)




When not monitoring the start switch
 (welding of start switch cannot be detected)

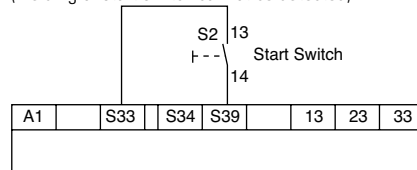

When monitoring the start switch
 (detecting the OFF status of start switch)

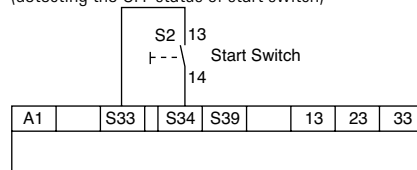


When not monitoring the start switch
 (welding of start switch cannot be detected)

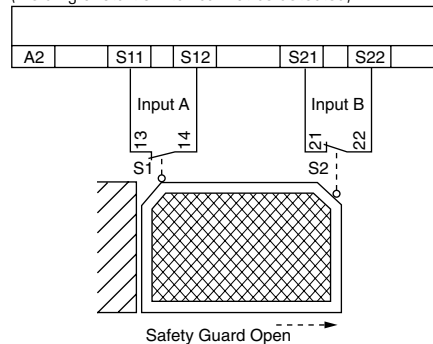

ESC: External Start Condition
 F1: Protection fuse for the power of safety relay module
 K3, 4: Safety contactor

Safety Category 3 Example Circuit (using multiple emergency stop switches)

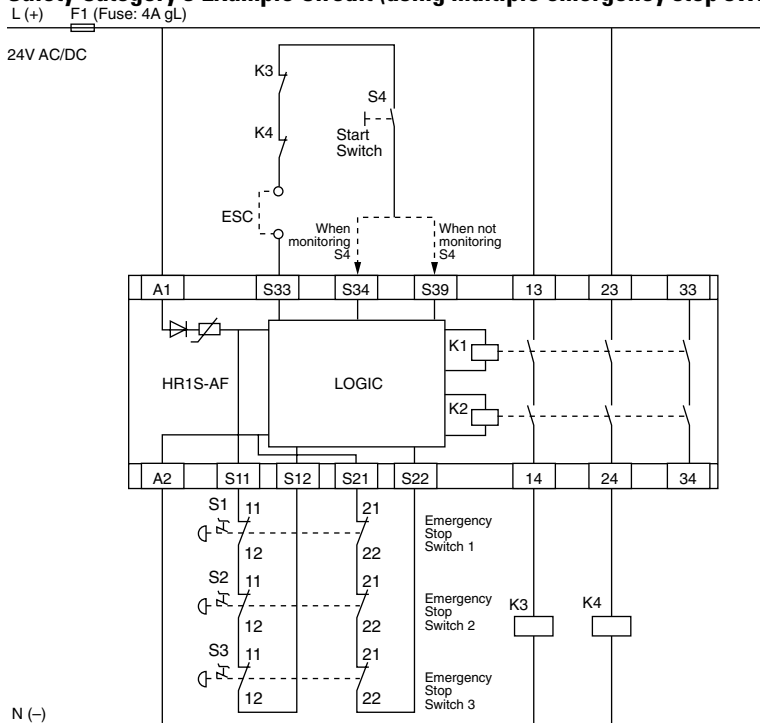

(1) = Start Switch Monitor
 ESC: External Start Condition
 F1: Protection fuse for the power of safety relay module
 K3, 4: Safety contactor

HR1S-AF Operation Chart
When Using the Emergency Stop Switch

Overview

XW Series E-Stops


Interlock Switches

Enabling Switches

Safety Control


Light Curtains

AS-Interface Safety at Work

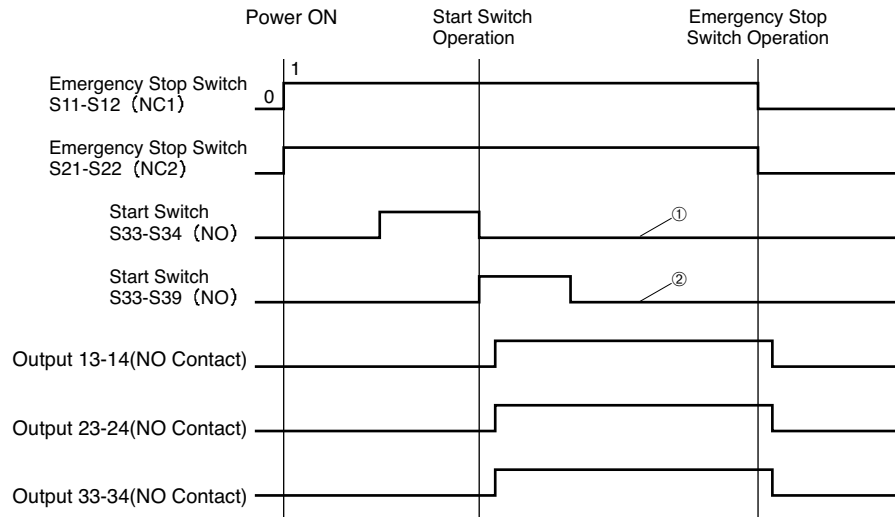


- Ⓛ When monitoring the start switch (detecting the OFF status of start switch)
- Ⓜ When not monitoring the start switch (contact welding of start switch cannot be detected)

When not Using the Safety Guard (Automatic Start)

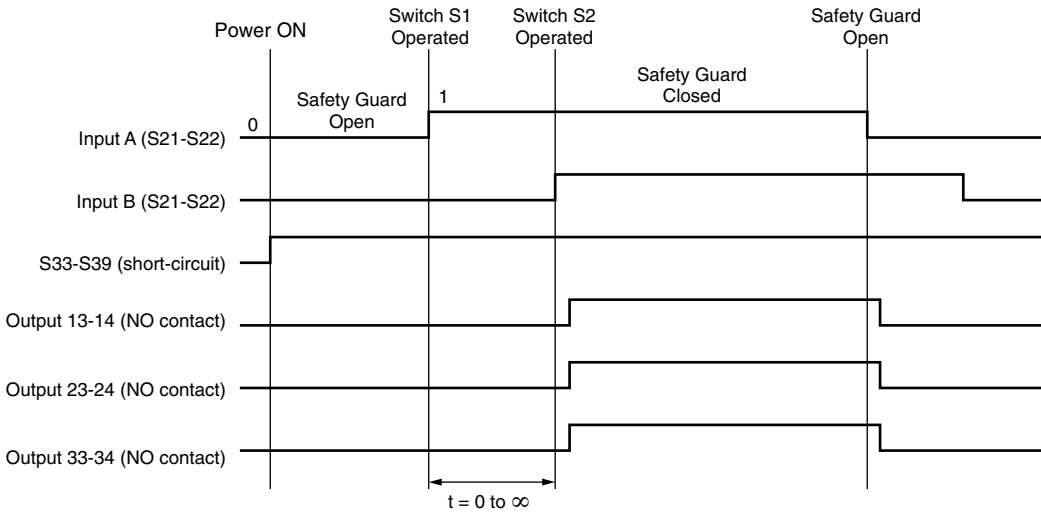

Output Contact Electrical Life

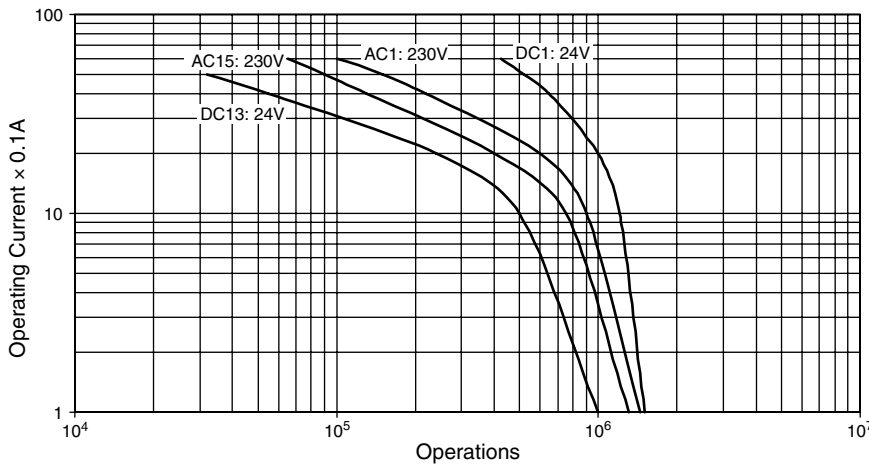

Safety Relay HR1S-DM

Key features:

- 1NO-1NC safety input type, such as magnetic coded safety switches
- Fault diagnosis function with dual safety circuits.
- Internal relay operations can be monitored with LED Indicator.
- Finger-safe protection
- 22.5 or 45mm wide, 35mm DIN rail mounting
- EN ISO 13849-1 PL_e, Safety Cat 4 compliant, and EN 62061 SIL 3
- UL listed, CSA certified, TÜV NORD approved



HR1S-DMB(JP





Part Numbers

Part Number	Terminal Style	Input
HR1S-DMB1132	Integrated Terminal Block	2
HR1S-DMB1132P	Removable Terminal Block	
HR1S-DME1132	Integrated Terminal Block	6
HR1S-DME1132P	Removable Terminal Block	


Specifications

Operating Temperature	-10 to 55°C (no freezing)	
Degree of Protection	Terminal: IP20, Housing: IP40	
Rated Power Voltage	24V DC (-20 to +20%)	
Power Consumption	HR1S-DMB: 2.5W maximum (24V DC) HR1S-DME: 3.5W maximum (24V DC)	
Overcurrent Protection	Electronic	
Control Circuit Voltage	24V DC	
Performance Level (PL)	e (EN ISO 13849-1)	
Safety Category	4 (EN ISO 13849-1)	
Safety Integrity Level (SIL)	3 (EN 62061)	
Response Time	20 ms maximum	
Input Synchronization Time	500ms max	
Overvoltage Category	III	
Pollution Degree	2	
Rated Insulation Voltage	300V	
Maximum Input Resistance	100Ω (per input point)	
No. of Outputs	Safety Circuit: 2NO Auxilliary Contact: 2NO (transistor PNP)	
Output Contact Ratings	Safety Circuit AC-15	C300: U _e = 240VAC, I _e =0.75A
	DC-13	U _e = 24V DC, I _e = 1.5A
	Transistor Circuit	24V/20 mA
	Minimum Applicable Load	17V/10 mA (initial value)
Operation Frequency	1200 operations/hour maximum	
Rated Current	Output total 12A maximum	
Wire Size	0.14 to 2.5 mm ²	
Weight	HR1S-DMB: 180g HR1S-DME: 250g	



**Dimensions (mm)
HR1S-DMB**

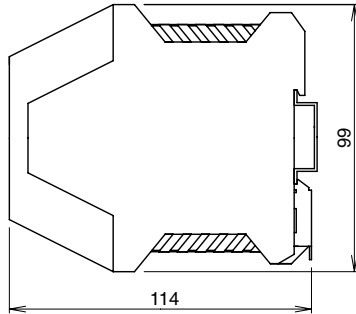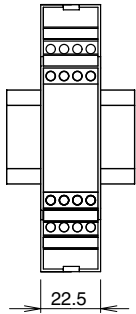


**Terminal Arrangement
HR1S-DMB**

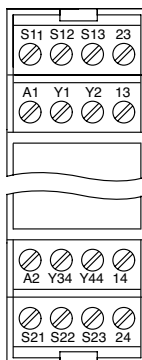

**Dimensions (mm)
HR1S-DME**

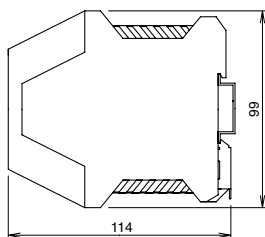

**Terminal Arrangement
HR1S-DME**

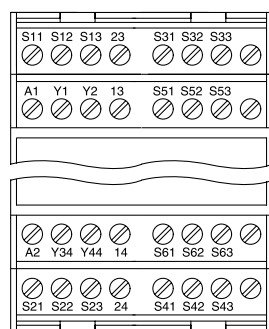

Use a 4A fuse (Type gL) for power fuse protection.
Use a 4A (Type gL) or a 6A fast blow fuse for output fuse protection.

LED Indicator

HR1S-DMB


- Power A1/A2:
Turns on when power circuit is normal.
Turns off when power is interrupted or the electronic fuse blows.
- Fault:
Turns on when the HR1S fails (see failure causes on page 694).
- K1/K2:
Turns on when K1/K2 relays operate.

HR1S-DME

- Power A1/A2:
Turns on when power circuit is normal.
Turns off when power is interrupted or the electronic fuse blows.
- Fault:
Turns on when the HR1S fails (see failure causes on page 694)
- K1/K2:
Turns on when K1/K2 relays operate.
- S13: NO contact of non-contact interlock switch 1
- S12: NC contact of non-contact interlock switch 1
- S23: NO contact of non-contact interlock switch 2
- S22: NC contact of non-contact interlock switch 2
- S33: NO contact of non-contact interlock switch 3
- S32: NC contact of non-contact interlock switch 3
- S43: NO contact of non-contact interlock switch 4
- S42: NC contact of non-contact interlock switch 4
- S53: NO contact of non-contact interlock switch 5
- S52: NC contact of non-contact interlock switch 5
- S63: NO contact of non-contact interlock switch 6
- S62: NC contact of non-contact interlock switch 6


HR1S-DM Operation Chart

When Using the Emergency Stop Switch

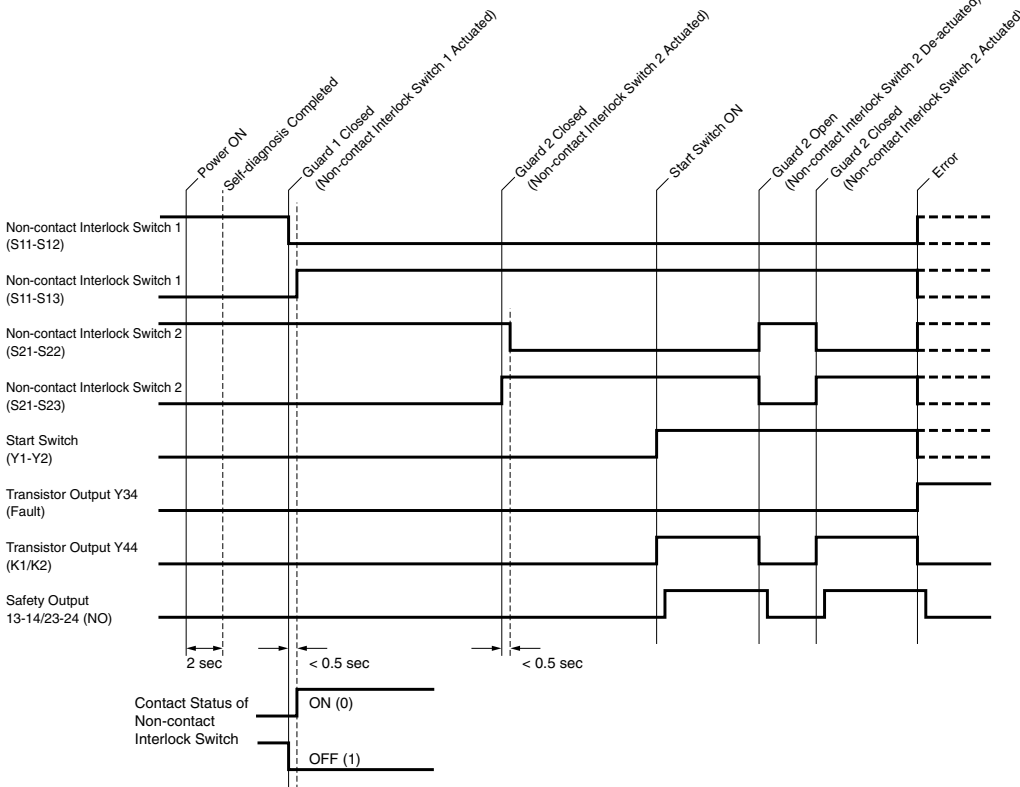

Causes of Fault LED Indication

LED2: Fault	Fault Type	Fault Cause	Measures
	Internal Fault	Fault of the internal circuit	Replace the safety relay module.
	External Fault	Short circuit of the +24V power supply and input terminal	Remove the short circuit and reboot.
	External Fault	Short-circuit of the non-contact interlock switch wiring	Correct the wiring of the non-contact interlock switch and reboot.
	Synchronization time excess of switch contact input	Synchronization for the NO contact and NC contact of the non-contact interlock switch (HS7A) is 0.5 seconds or longer.	Open and close the door again.
		Fault of the non-contact interlock switch (HS7A)	Replace the non-contact interlock switch.

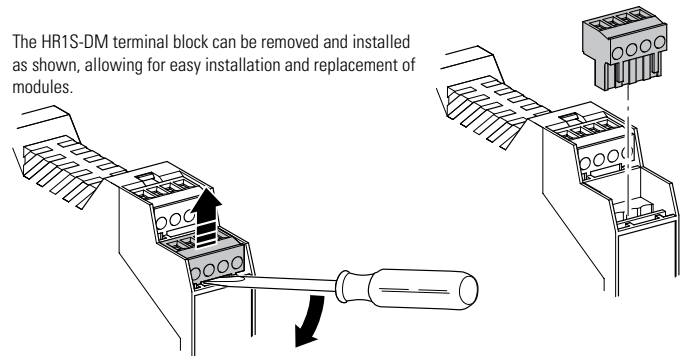

Safety Relay HR1S-ATE

Key features:

- EN ISO 13849-1 performance level e, safety category 4 compliant, and EN 62061 safety integrity level 3
- Integrated and removable terminal styles available
- Compact design: 45 mm in width
- Time delay outputs: 3NO
- Auxiliary output enables power supply monitoring, inputs (2 channels), and a time delay output
- Environmentally friendly, RoHs directive compliant
- UL Listed, CSA certified, TÜV NORD approved




Part Numbers


Part Number	Terminal Style
HR1S-ATE5110	Integrated Terminal Block
HR1S-ATE5110P	Removable Terminal Block

Dimensions (mm)


HR1S-ATE5110 Integrated Terminal Type

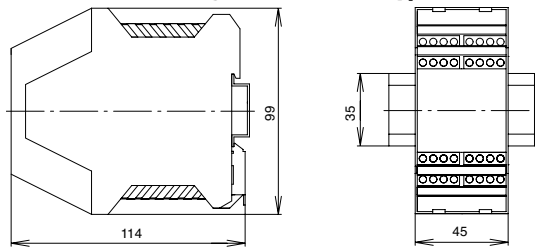

HR1S-ATE5110P Removable Terminal Type

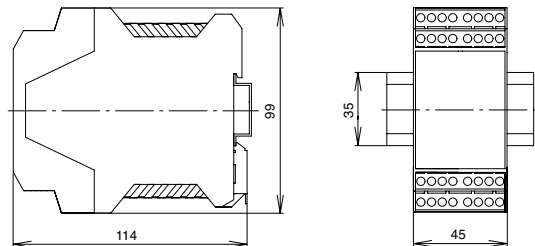

LED Indicator



- A1/A2 Fuse: Turns on when power circuit is normal.
- Input A S12: Turns on when S11–S12 is closed.
- Input B S22: Turns on when S21–S22 is closed.
- Stop 1: Turns on when the time-delay output circuits 57-58, 67-68, and 77-78 are closed.



Note: Safety output contact
Time-delay output contact

Stop category 0
Stop category 1

Specifications

Applicable Standards	EN 60204-1: 2007, EN 60947-1: 2007, EN 60947-5-1:2004, EN 61000-6-2: 2005, EN 61000-6-4: 2007, EN 62061: 2005, EN ISO 13849-1: 2008, EN ISO 13849-2: 2008		
Applicable Standards for Use	EN 60204-1: 2006, EN ISO 13850: 2008		
Performance level (PL)	e (EN ISO 13849-1)		
Safety Category	4 (EN ISO 13849-1)		
Safety Integrity Level (SIL)	3 (EN 62061)		
Stop Category	0, 1 (EN 60204-1) (Note)		
Operating Temperature	-10 to +55°C (no freezing)		
Relative Humidity	30 to 85% RH (no condensation)		
Impulse Withstand Voltage	4 kV (IEC 60947-5-1)		
Shock Resistance	150 m/s ² , 11m sec, 3 shocks in each 3 axes		
Vibration Resistance	10 to 60 Hz, amplitude 0.35 mm 60 to 150 Hz, acceleration 50 m/s ²		
Degree of Protection	Terminal: IP20 Enclosure: IP40		
Rated Voltage	24V AC -20% +10% 24V DC -20% +20%		
Power Consumption	24V AC: 8 VA max. 24V DC: 4W max.		
Overcurrent Protection	Built-in, electronic		
Minimal Applicable Load	17V DC / 10 mA (initial value)		
Response Time	ON to OFF: 20 ms max. (instantaneous output)		
Overvoltage Category	III		
Pollution Degree	2		
Rated Insulation Voltage	300V Ac		
No of Outputs	Safety Circuit	2NO	
	Time-delay Circuit	3NO	
	Auxiliary Circuit	None	
	Transistor	4	
Output Contact Ratings	Safety Circuit	AC15	C300 (230V AC / Ie=0.75A)
	DC13	24V DC / Ie=1A	
	Time-delay Circuit	AC15	C300 (230V AC/ Ie=0.75A)
	DC13	24V DC / Ie=1A	
	Preset Time	0, 0.5, 1, 2, 4, 6, 8, 10, 15, 20, 25, 30 sec.	
	Auxiliary Circuit	24V DC / 20 mA (PNP)	
Mechanical Durability	10,000,000 operations		
Electrical Durability	See page XX		
Rated Current	Total output: 8A max. 1 output 4A max.		
Wire Size	HR1S-ATE5110	Single wire: 0.2 to 2.5 mm ² max. (24-14 AWG) Multiple wires: 0.14 to 0.75 mm ² max.	
	HR1S-ATE5110P	Single wire: 0.2 to 2.5 mm ² max.(24-14 AWG) Multiple wires: 0.2 to 1.5 mm ² max.	
Weight (approx.)	280g		

Use a 4A fuse (Type gG) for power protection. Use a 6A fuse (Type gG) for safety output protection.
Use a 4A fuse (Type gG) for time-delay output and auxiliary output protection.

Overview

XW Series E-Stops

Interlock Switches

Enabling Switches

Safety Control

Light Curtains

AS-Interface Safety at Work

HR1S-ATE Wiring Diagram

Safety Category 4 (3) Circuit (using an emergency stop switch) (Note)

Overview

XW Series E-Stops

Interlock Switches

Enabling Switches


Safety Control

Light Curtains

AS-Interface Safety at Work




Safety category is achieved by the entire control system. Take the connected safety equipment and wiring into consideration.

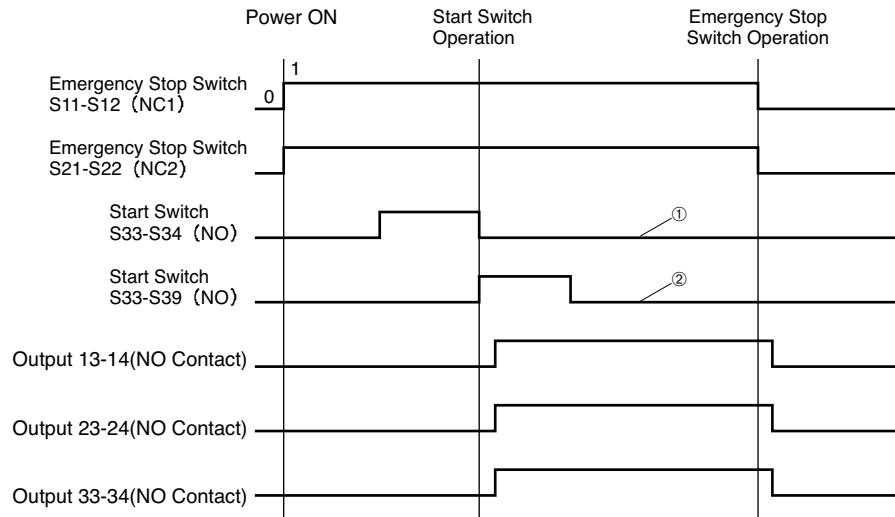


When not monitoring the start switch

(Y3-Y4 short-circuited)
(automatic start when S33-Y2 is short-circuited)



When monitoring the start switch

(Y3-Y5 short-circuited)




1. When monitoring the start switch, starts when switched off (default setting/recommended)
 2. When monitoring the start switch, starts when switched on
 3. Outputs must be fused (see the instruction manual for maximum fuse size)
 4. To PLC, etc.
- Note: When using off-delay output, safety category becomes 3.

S1 = Emergency stop switch with 2 NC contacts (recommended)
S2 = Start switch
ESC = External start conditions
Y1 (S33) – Y2 = Feedback loop


Emergency stop switch - Input 1 channel

When not detecting short-circuit (All failures such as short-circuit of emergency stop switch wiring not detected)

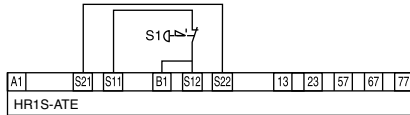


Emergency stop switch - Input 2 channels


When not detecting short-circuit(B1-S12 short-circuit not detected)

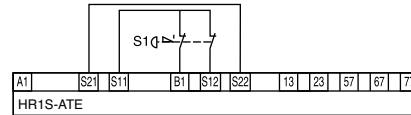

Safety Category 3 Example Circuit (using multiple emergency stop switches)

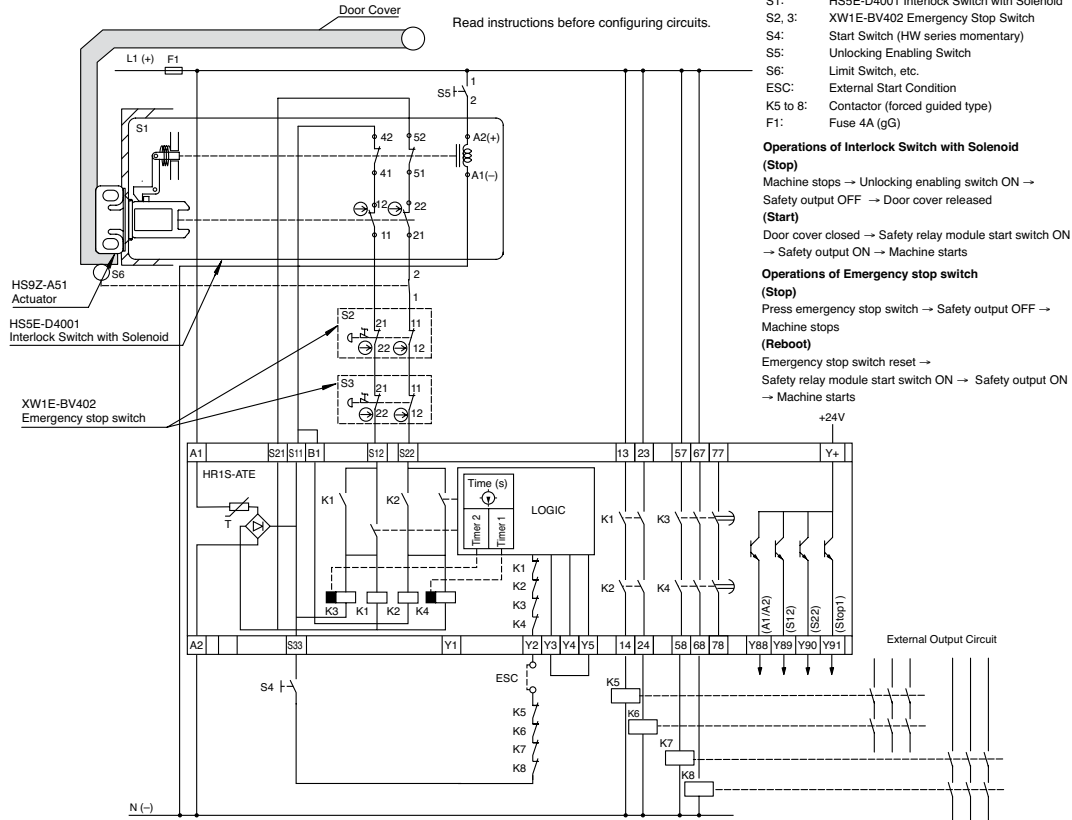


HR1S-ATE Operation Chart

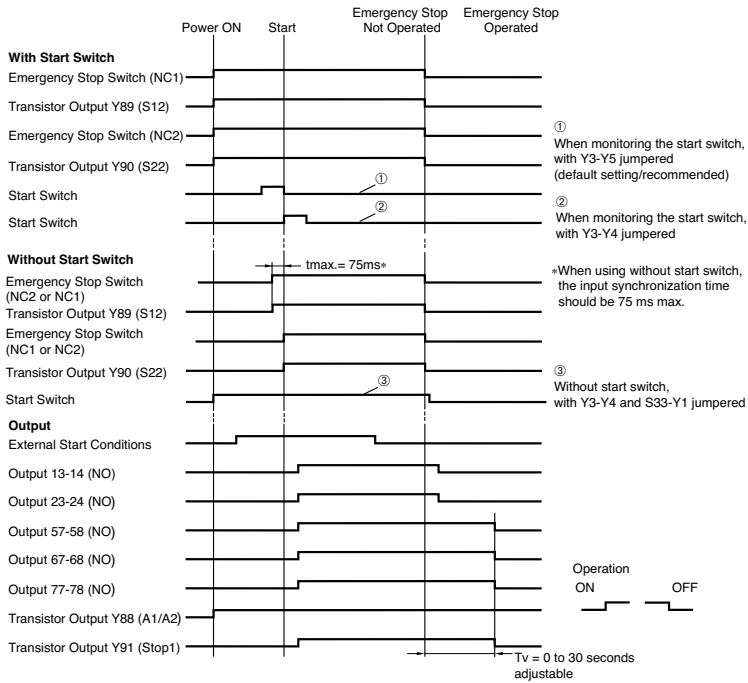

Output Contact Electrical Life

(Safety Circuit, Time-delay Circuit, Auxilliary Circuit)

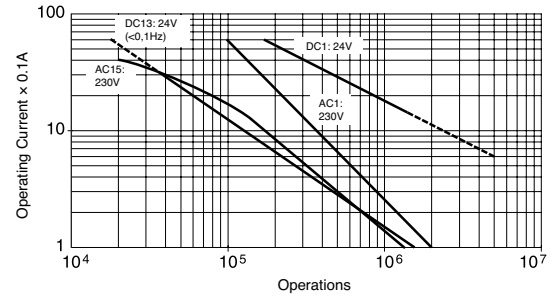

Residual Risk (En ISO/ISO12100-1)

The wiring diagrams on previous page have been tested under actual operating conditions. The HR1S-ATE safety relay module can be used in a safety circuit by connecting to safety equipment compliant to applicable standards. Consider residual risk in the following circumstances:

a) When it is necessary to modify the recommended circuit and if added/modified components are not properly integrated into the control circuit.

b) When applicable standards of machine operation are not observed, or when the machine is not adjusted or maintained properly (adhere to a strict maintenance schedule).

c) When the contacts of relays and contactors for connected with safety outputs are not forced guided (compliant with EN 50205).