




The KVM Series is a single-phase undervoltage monitor designed to protect sensitive equipment against brownout undervoltage conditions. The compact design and encapsulated construction make the KVM an excellent choice for OEM equipment.

For more information see:  
Appendix B, page 165, Figure 1 for dimensional drawing.  
Appendix C, page 169, Figure 16 for connection diagram.

### Operation

The output relay is energized and the LED glows green when the input voltage is above the reset voltage threshold. If the input voltage drops below the undervoltage setpoint, the output relay and LED will de-energize. The output relay will remain de-energized as long as the input voltage is below the reset voltage. Reset is automatic when the input voltage returns to a normal range.



TP = Undervoltage Setpoint  
R = Reset Point

### Features:

- Economical single-phase brownout/undervoltage protection
  - Isolated, 8A, SPDT output contacts
  - Protects sensitive 110 to 120VAC or 220 to 240VAC loads
  - Adjustable low voltage trip point
  - LED Indicator
- Approvals:

### Auxiliary Products:

- **Quick connect to screw adaptor:**  
P/N: P1015-18
- **Female quick connect:**  
P/N: P1015-64 (AWG 14/16)
- **DIN rail:** P/N: C103PM (Al)
- **DIN rail adaptor:** P/N: P1023-20

### Available Models:

KVM4  
KVM6

### Order Table:


<u>Undervoltage Setpoint</u>	<u>Maximum Line Voltage</u>	<u>Part Number</u>
78 to 99VAC	132VAC	KVM4
156 to 199VAC	264VAC	KVM6

### Specifications

Line Voltage	Single phase	Life	Mechanical - $1 \times 10^6$ ; Electrical - $1 \times 10^5$
Type		LED Indicator	Glows green when output is energized
Input Voltage	110 to 120VAC or 220 to 240VAC	<b>Protection</b>	
AC Line Frequency	50/60 Hz	Surge	IEEE C62.41-1991 Level A
Power Consumption	2.5W @ 132VAC; 4.5W @ 264VAC	Circuitry	Encapsulated
Power Off Reset Time	$\leq 150\text{ms}$	Isolation Voltage	$\geq 1500\text{V RMS}$ input to output
<b>Undervoltage Detection</b>		Insulation Resistance	$\geq 100\text{ M}\Omega$ minimum
Undervoltage Setpoint	KVM4.....78 to 99VAC	<b>Mechanical</b>	
	KVM6.....156 to 199VAC	Mounting	Surface mount with one #10 (M5 x 0.8) screw
Undervoltage Reset Point	KVM4.....Fixed at 104VAC	Dimensions	2 x 2 x 1.21 in. (50.8 x 50.8 x 30.7 mm)
	KVM6.....Fixed at 209VAC	Termination	0.25 in. (6.35 mm) male quick connect terminals
Repeatability	$\pm 0.5\%$ under fixed conditions	<b>Environmental</b>	
	$\pm 1\%$ over temperature range	Operating / Storage Temperature	-25 to 55°C / -40 to 85°C
Voltage Sensing Accuracy	$\pm 2\%$ at 25°C	Humidity	95% relative, non-condensing
<b>Output</b>		Weight	2.6 oz (74 g)
Type	Electromechanical relay		
Form	SPDT		
Rating	8A resistive @ 120VAC, 1/3 hp @ 120/240VAC		

# Appendix B - Dimensional Drawings


**FIGURE 1**

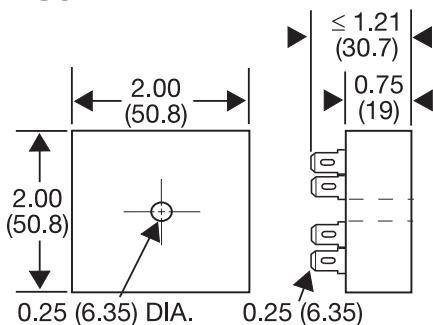

0.25 (6.35) DIA. 0.25 (6.35)


CT; ESD5; ESDR; FS100; FS200; FS300; KR3; KR9;  
KRDB; KRDI; KRDM; KRDR; KRDS; KRPD; KRPS;  
KSD1; KSD2; KSD3; KSD4; KSDB; KSDR; KSDS;  
KSDU; KSPD; KSPS; KSPU; KVM; T2D; TA; TAC1;  
TAC4; TDU; TDUB; TDUI; TDUS; TL; TMV8000;  
TS1; TS2; TS4; TS6; TSB; TSD1; TSD2; TSD3; TSD4;  
TSD6; TSD7; TSDB; TSDR; TSDS; TSS; TSU2000

**FIGURE 2**

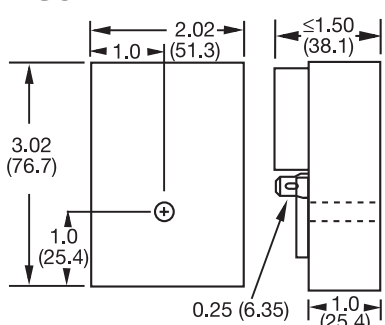


HLV; HRD3; HRD9; HRDB; HRDI;  
HRDM; HRDR; HRDS; HRID; HRIS;  
HRIU; HRPD; HRPS; HRPV; HRV; RS

**FIGURE 3**

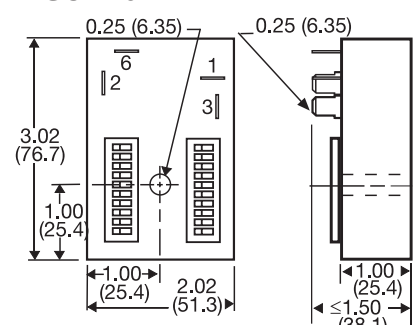

HSPZ


**FIGURE 4**

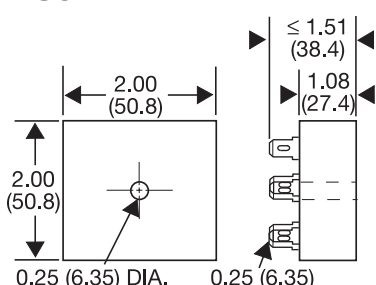

FA; FS; FSU1000\*; NHPD; NHPS; NHPV;  
NLF1\*; NLF2\*; PHS\*; PTHF\*; SIR1; SIR2;  
SLR1\*; SLR2\*; TH1; TH2; THC; THD1;  
THD2; THD3; THD4; THD7; THDB; THDM;  
THDS; THS


\*If unit is rated @ 1A, see Figure 1

**FIGURE 5**

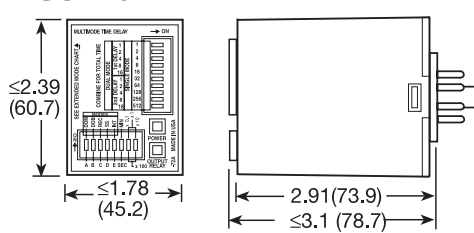


TRDU

**FIGURE 6**

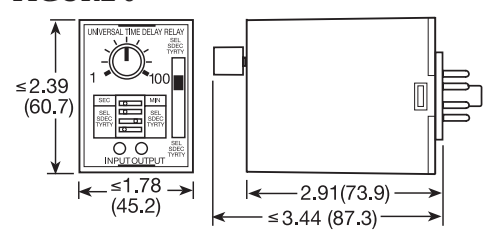


TRU

**FIGURE 7**

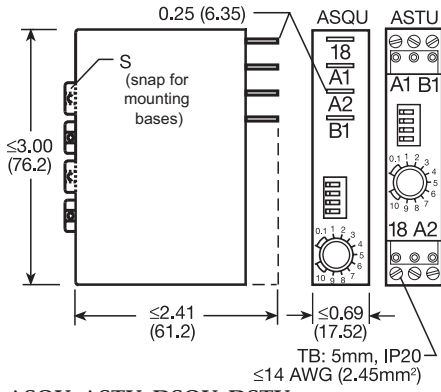


ASQU; ASTU; DSQU; DSTU

**FIGURE 8**

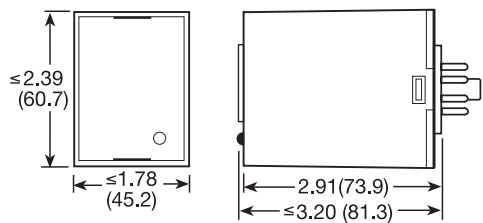


PLM; PLR; TDB; TDBH; TDBL; TDI; TDIH;  
TDIL; TDM; TDMB; TDMH; TDML; TDR;  
TDS; TDSH; TDSL

**FIGURE 9**

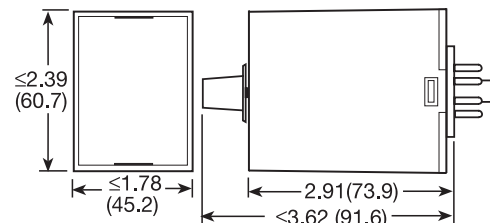


FS500; PRLB; PRM; PRLS; TRB; TRM; TRS

**FIGURE 10**

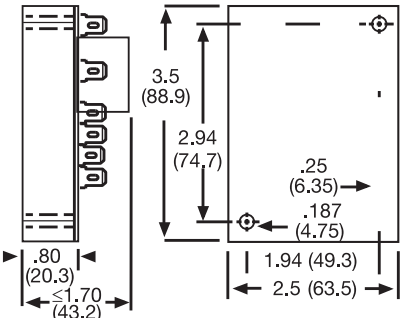


ERD3; ERDI; ERDM

**FIGURE 11**

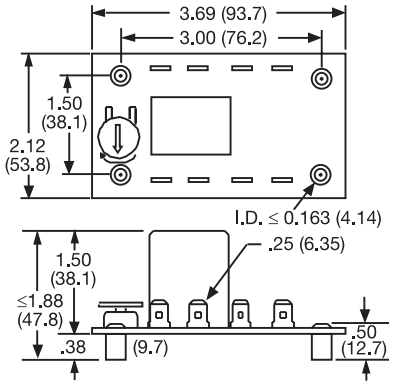

ORB; ORM; ORS

**FIGURE 12**

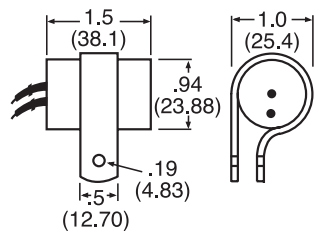


FS100; FS400

inches (millimeters)


# Appendix C - Connection Diagrams

FIGURE 15 - HLV Series

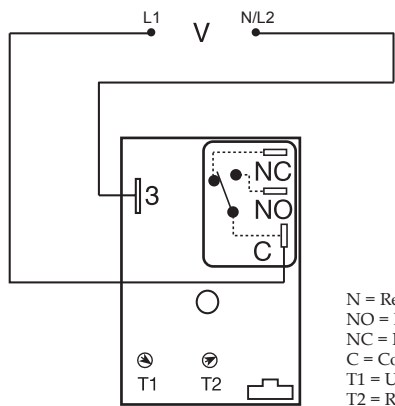


N = Relay contacts are non-isolated.  
 NO = Normally Open  
 NC = Normally Closed  
 C = Common  
 T1 = Undervoltage Trip Point  
 T2 = Restart Delay

FIGURE 16 - KVM Series

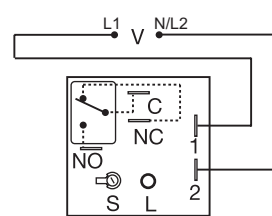


V = Voltage  
 L = LED  
 S = Undervoltage Setpoint  
 NO = Normally Open  
 NC = Normally Closed  
 C = Common, Transfer Contact

FIGURE 17 - ECS Series

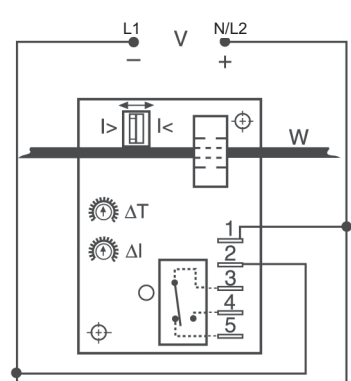


V = Voltage  
 W = Insulated Wire Carrying Monitored Current  
 I = Overcurrent  
 K = Undercurrent  
 Relay contacts are isolated.

FIGURE 18 - ECSW Series

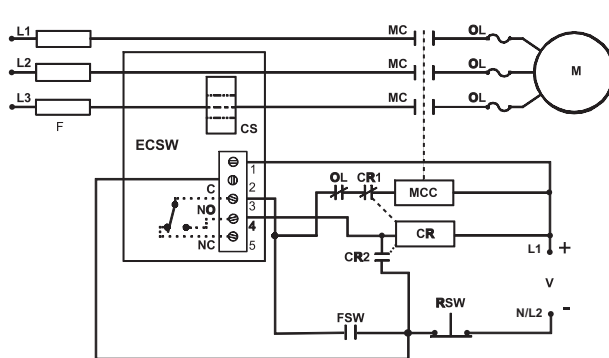


MC = Motor Contactor  
 M = Motor  
 F = Fuses  
 OL = Overload  
 RSW = Reset Switch  
 CS = Current Sensor  
 MCC = Motor Contactor Coil  
 CR = Control Relay  
 FSW = Fan or Float Contacts




V = Voltage  
 I = Adjustable Overcurrent  
 K = Adjustable Undercurrent  
 W = Monitored Wire  
 ΔT = Adjustable Trip Delay


FIGURE 19 - TCS Series

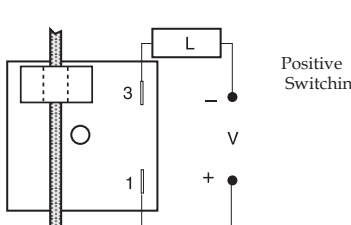

Positive Switching

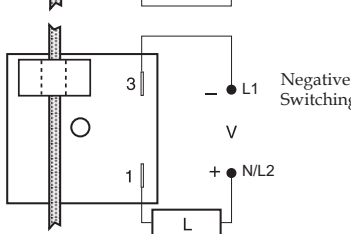


Negative Switching

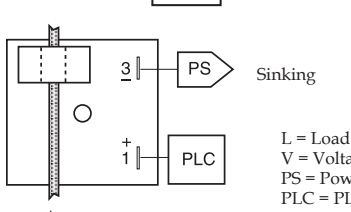

Sinking


L = Load  
 V = Voltage  
 PS = Power Supply  
 PLC = PLC Digital Input Module

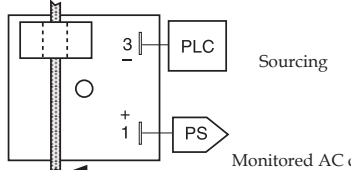

Sourcing


Monitored AC conductor must be insulated.

FIGURE 20 - TCSA Series



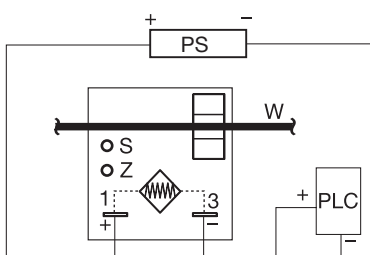


4... 20 mA  
 PS = Power Supply  
 Z = Zero Adjust  
 S = Span Adjust  
 W = Insulated Wire Carrying Monitored Current  
 PLC = PLC Analog Input or Meter Input

FIGURE 21 - DCSA Series

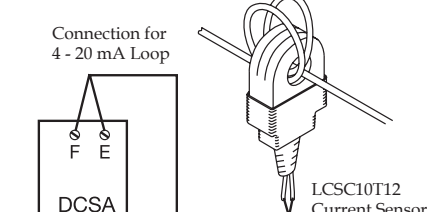

Connect One:  
 A = 1 to 5VDC  
 B = 2 to 10VDC



Connect One:  
 A = 1 to 5VDC  
 B = 2 to 10VDC

AD = Instrument, Meter, or PLC Input  
 PS = Power Supply