

# XS26-2/SC26-2 Base Safety Controllers



## Datasheet

- Control System monitors a variety of input devices such as e-stop buttons, rope pulls, enabling devices, protective safety stops, interlocked guards or gates, optical sensors, two-hand controls, and safety mats
- Pre-configured safety function blocks including Two-Hand Control, Muting, and Enabling Device to simplify application programming
- Boolean logic functions for programming flexibility
- Intuitive programming environment for easy implementation
- Expandable models for adding up to 8 additional I/O modules for larger scale applications
- Base Controller allows 8 of the 26 inputs to be configured as outputs for efficient terminal utilization
- Ethernet models available providing up to 64 virtual status outputs
- Optional onboard LCD display for system status and diagnostic information
- Optional accessories:


- |           |                       |
|-----------|-----------------------|
| SC-USB2   | USB Cable             |
| SC-XM2    | External Memory Drive |
| p/n 90443 | Resource CD           |

Model	Features
XS26-2	Expandable
XS26-2d	Expandable + Display
XS26-2e	Expandable + Ethernet
XS26-2de	Expandable + Display + Ethernet
SC26-2	Non-Expandable
SC26-2d	Non-Expandable + Display
SC26-2e	Non-Expandable + Ethernet
SC26-2de	Non-Expandable + Display + Ethernet



NOTE: Configuration software required.  
The software is available at <http://www.bannerengineering.com/xs26> or installed from the optional Resource CD.

## Features Diagram

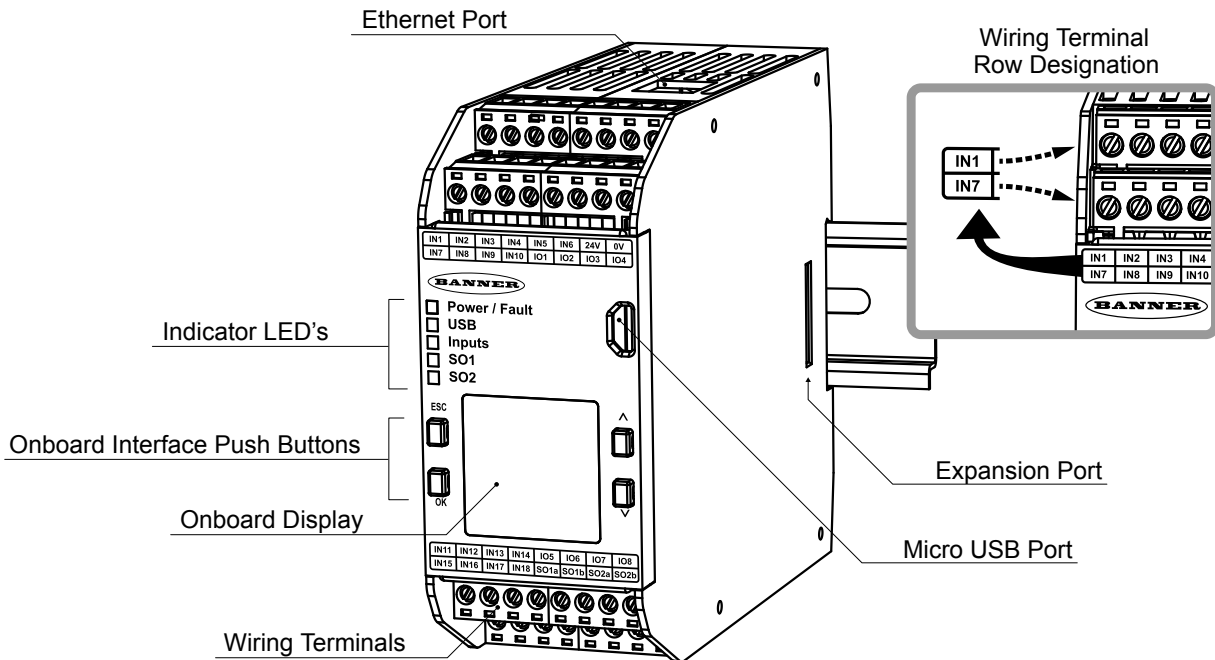

## Specifications

### Mechanical Stress

Shock: 15 g for 11 ms, half sine, 18 shocks total (per IEC 61131-2)  
 Vibration: 3.5 mm occasional / 1.75 mm continuous at 5 Hz to 9 Hz,  
 1.0 g occasional and 0.5 g continuous at 9 Hz to 150 Hz: all at 10  
 sweep cycles per axis (per IEC 61131-2)

### Safety

Category 4, PL e (EN ISO 13849)  
 SIL CL 3 (IEC 62061, IEC 61508)

### Product Performance Standards

See Standards and Regulations section in the Instruction Manual for a  
 list of industry applicable U.S. and international standards.

### EMC

Meets or exceeds all EMC requirements in IEC 61131-2, IEC 62061  
 Annex E, Table E.1 (increased immunity levels), IEC 61326-1:2006,  
 and IEC61326-3-1:2008

### Power

24 V dc  $\pm$  20% (incl. ripple), 100 mA no load  
 Ethernet models: add 40 mA  
 Display models: add 20 mA  
 Expandable models: 3.6 A max. bus load

### Network Interface (Ethernet models only)

Ethernet 10/100 Base-T/TX, RJ45 modular connector  
 Selectable auto negotiate or manual rate and duplex  
 Auto MDI/MDIX (auto cross)  
 Protocols: EtherNet/IP (with PCCC), Modbus/TCP  
 Data: 64 configurable virtual Status Outputs; fault diagnostic codes  
 and messages; access to fault log

### Convertible I/O

Sourcing current: 80 mA maximum (overcurrent protected)

### Test Pulse

Width: 200  $\mu$ s max.  
 Rate: 200 ms typical

### Certifications

Non-expandable models (SC26-2xx):



Ind. Cont. Eq.  
 3TJJ

Expandable models (XS26-2xx): Approvals pending



**Important:** The Safety Controller and all solid state output expansion modules should be connected only to a SELV (Safety Extra-Low Voltage, for circuits without earth ground) or a PELV (Protected Extra-Low Voltage), for circuits with earth ground power supply.

### Operating Conditions

Temperature: 0 °C to +55 °C (+32 °F to +131 °F)

### Environmental Rating

NEMA 1 (IEC IP20), for use inside NEMA 3 (IEC IP54) or better enclosure

### Removable Screw Terminals

Wire size: 24 to 12 AWG (0.2 to 3.31 mm<sup>2</sup>)  
 Wire strip length: 7 to 8 mm (0.275 in to 0.315 in)  
 Tightening torque: 0.565 N·m (5.0 in·lb)

### Removable Clamp Terminals

*Important: Clamp terminals are designed for 1 wire only. If more than 1 wire is connected to a terminal, a wire could loosen or become completely disconnected from the terminal, causing a short.*  
 Wire size: 24 to 16 AWG (0.20 to 1.31 mm<sup>2</sup>)  
 Wire strip length: 8.00 mm (0.315 in)

### Safety Inputs (and Convertible I/O when used as inputs)

Input On threshold: > 15 V dc (guaranteed on), 30 V dc max.  
 Input Off threshold: < 5 V dc and < 2 mA, -3 V dc min.  
 Input On current: 5 mA typical at 24 V dc, 50 mA peak contact  
 cleaning current at 24 V dc  
 Input lead resistance: 300  $\Omega$  max. (150  $\Omega$  per lead)  
 Input requirements for a 4-wire Safety Mat:  
 · Max. capacity between plates: 0.22  $\mu$ F  
 · Max. capacity between bottom plate and ground: 0.22  $\mu$ F  
 · Max. resistance between the 2 input terminals of one plate: 20  $\Omega$

### Solid State Safety Outputs

0.5 A max. at 24 V dc (1.0 V dc max. drop)  
 Output OFF threshold: 1.7 V dc typical (2.0 V dc max.)  
 Output leakage current: 50  $\mu$ A max. with open 0 V  
 Load: 0.1  $\mu$ F max., 1 H max., 10  $\Omega$  max. per lead

### Response and Recovery Times

Delayed Output Tolerance:  $\pm$ 3%  
 Response Time (On to Off): see Configuration Summary in the PC  
 Interface, as it can vary

### Current Feature ID

Base Modules:	1	XS8si and XS16si:	1
XS2so and XS4so:	1	XS1ro and XS2ro:	1

## Banner Engineering Corp. Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp.