



VIEW FROM OUTSIDE OF MOTOR AT SWITCH END.

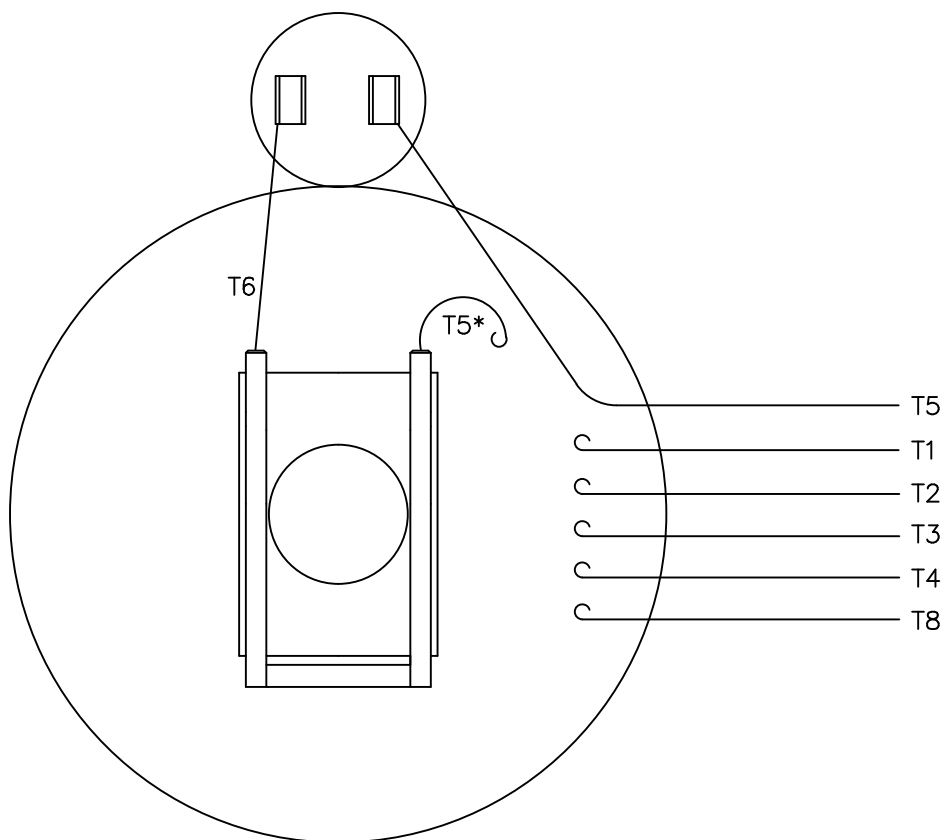


LINE LEADS

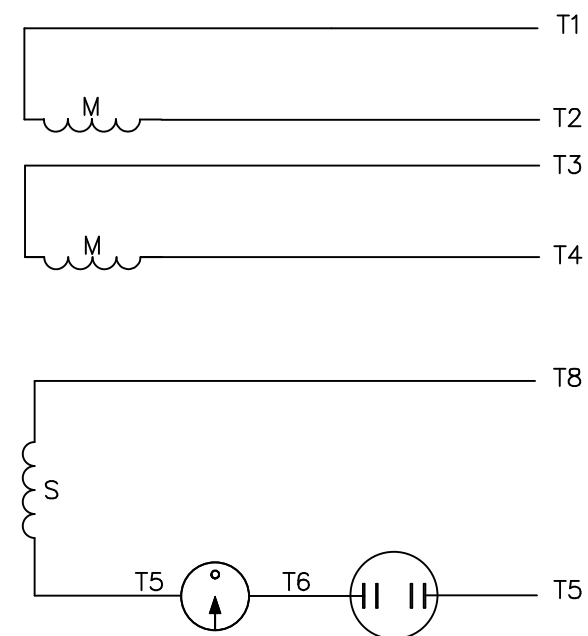

* THIS LEAD MAY BE WHITE

	ROTATION FACING LEAD END	L1	L2	JOIN
HIGH VOLT	C.C.W.	T1	T4 T5	T2,T3 T8
	C.W.	T1	T4 T8	T2,T3 T5
LOW VOLT	C.C.W.	T1,T3 T8	T2,T4 T5	---
	C.W.	T1,T3 T5	T2,T4 T8	---

				TOLERANCES UNLESS SPECIFIED			ELECTRIC MOTORS GEARMOTORS AND DRIVES		DRAWN JRW 12/05/74	
				DEC.	INCHES				CHK	
				.X	±.1				APPD	T.E.M.
12	ALTERNATE T5 LEAD MARKING WAS RED	RLW	8/6/02	.XX	±.01	TITLE	EXT. WIRING DIAGRAM TYPE "C" W/O PROTECTOR		SCALE 1=1	
11	ADDED ALTERNATE T5 LEAD MARKING	RLW	5/31/02	KH	.XXX				REF A-005061	
10	UPDATED TO CURRENT STANDARDS	DBT	06/09/97		.XXXX				FMF	
NO.	REVISION	BY & DATE	CHK	ANG	±1/2"	FINISH	DECAL - 004012		PREV	
				RFP		CAD FILE	00506201		SIZE	DRAWING NO.
				DIST	NLV				A	005062-01
										REV.
										12

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT
IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED
THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT