




CAUTION: WHEN APPLYING  
A PROTECTOR, BE OBSERVANT  
OF TIME/TEMPERATURE ON LOW  
VOLTAGE LOCK.

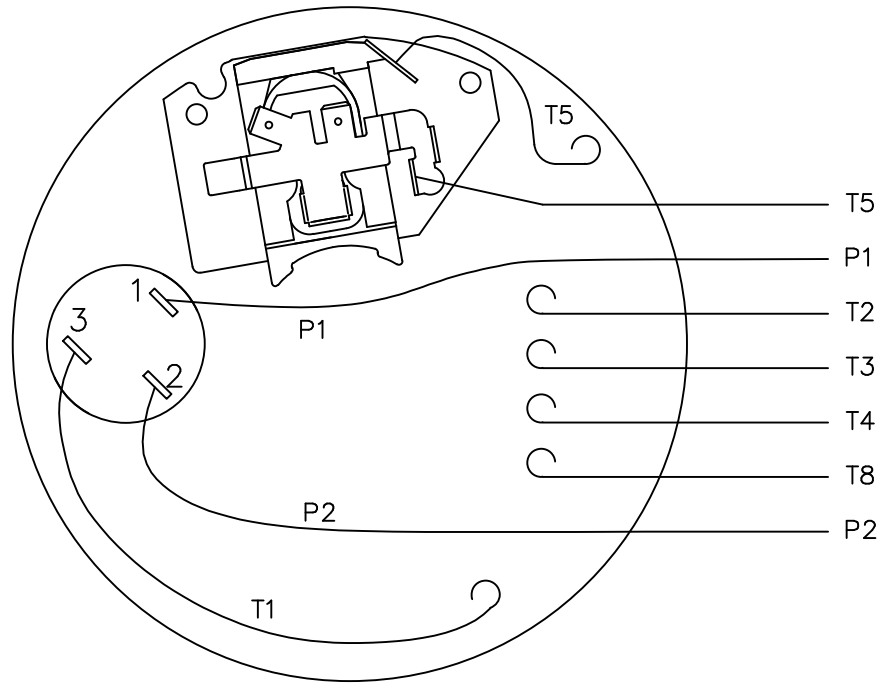

VIEW FROM OUTSIDE OF MOTOR AT SWITCH END

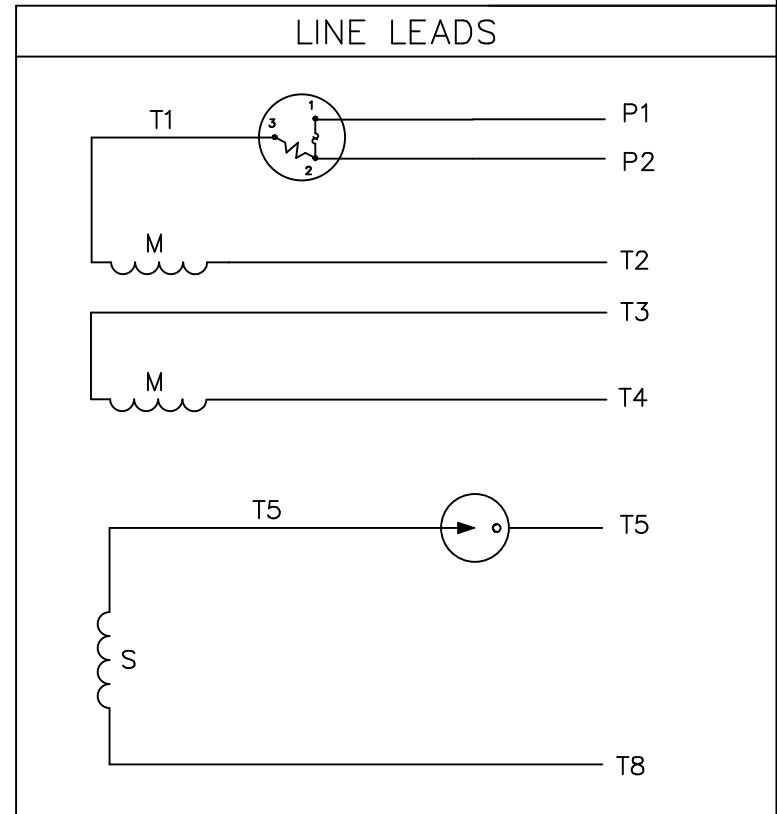

	ROTATION FACING LEAD END	L1	L2	JOIN	INSULATE SEPARATE
HIGH VOLT	C.C.W.	P1	T4, T5	T2, T3 T8	P2
	C.W.	P1	T4, T8	T2, T3 T5	P2
LOW VOLT	C.C.W.	P1	T2, T4 T5	P2 T3, T8	---
	C.W.	P1	T2, T4 T8	P2 T3, T5	---

		TOLERANCES UNLESS SPECIFIED		 ELECTRIC MOTORS GEARMOTORS AND DRIVES TITLE EXTERNAL WIRING DIAGRAM		DRAWN KMM 05/20/02			
		DEC.	INCHES			CHK			
		.X	±.1			APPD			
		.XX	±.01			SCALE 5=8			
		.XXX	±.005			REF 005212-01			
		.XXXX	±.0005	MAT'L.	DECAL - 004011	FMF 102511			
NO.	REVISION	BY & DATE	CHK	ANG	±1/2"	FINISH	TYPE "S" W/PROTECTOR	PREV	
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT				RFP	CAD FILE	00521205	SIZE	DRAWING NO.	REV.
				DIST			A	005212-05	