


- NOTES:
1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
 2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
 3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR

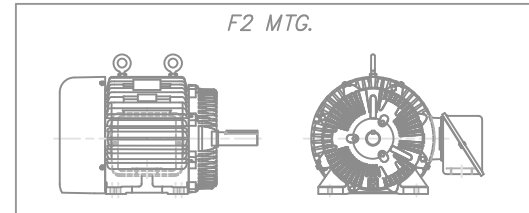

DASH	FRAME	C	H	B	2F	2FF	2FFF	BS
1350	364U	32.00	4	13.25	11.25	11.25	11.25	5.62
1450	365U	33.00	8	14.25	12.25	11.25	11.25	6.12

				TOLERANCES UNLESS SPECIFIED		Lincoln MOTORS		DRAWN KL 06-04-2001	
				DEC.	INCHES			CHK	DJK 06-04-2001
3	REVISED EYEBOLTS	CN 35028	MSG 10-07-2002	.X	±.1	TITLE OUTLINE		APPD	JES 06-04-2001
2	(4) FOOT HOLES ADDED AUTO DUTY	CN 35028	BJK 07-19-2002	.XX	±.003	360U FR. - TEFC - TAPPED LEAD HOLE		SCALE	1=5
1	NEW DRAWING	MU37686	KL 06-04-2001	.XXX	±.005	MAT'L		REF	B-SS504722
NO.	REVISION	BY & DATE	CHK	ANG	±7'30"	FINISH		FMF	PREV
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT				RFP	CAD FILE SS518366LN			SIZE	DRAWING NO. PAGE OF REV.
				DIST	WA	B		SS518366LN	3