

KBMA

Hybrid Drive™

A Digital Drive with Analog Interface

Rugged Aluminum NEMA 1 / IP 50 Enclosure

Primary Features

Horsepower 1/8 to 1 HP, Jumper Selectable
1Ø Input 115/230 VAC, 50/60 Hz
3Ø Output 230 VAC
200% Starting Torque
Front Panel Power On/Off Switch
Class "A" (CE) RFI Filter*

Benefits

Saves Time

Easy to Install and Simple to Operate
Does not require programming or commissioning
Up and running in less than 10 minutes.

Motors Last Longer

Proprietary CL Software
*Provides overload protection, prevents motor burnout and eliminates nuisance tripping.
UL approved as electronic overload protector for motors.*

Energy Saving

Uses only the power the application requires
Energy savings is realized by using variable motor speed vs. constant speed motors.

Economical to Use

Eliminates secondary enclosure
*No holes to drill, no switches to install.
No need to derate drive for high starting torque applications.*

Combines Soft Start with Variable Speed

Adjustable Soft Start.

KB Customization for OEM's

"You get exactly what you need. Nothing more, nothing less."
*Includes: custom label, preset calibration, installing drive options and custom software.
Ready to use "Out-of-the-Box."*

GFCI software** allows equipment to operate with Ground Fault Circuit Interruption circuit breakers or outlets.

*KBMA-24DF.

**With factory programming.



Automation and Control

KB Electronics, Inc.
kbelectronics.com • info@kbelectronics.com



Additional Features

Sensorless Flux Vector Control

Flux Vector Compensation with Static Auto-Tune provides excellent speed regulation with high torque loads throughout the entire speed range. Auto energy saving at light loads. Smooth motor torque.

Electronic Inrush Current Limit (EICL™) Protection

Eliminates harmful inrush AC line current during power up.

Run/Fault Relay

Can be used to turn equipment on or off, to signal a warning if the drive is put into "Stop" mode, or to signal if a fault has occurred.

On/Off AC Line Switch

Disconnects the AC line.

Ride-Through

Provides smooth recovery to the previous set speed during a momentary power loss.

Holding Torque at Zero Speed

Resists motor shaft rotation when the drive is in "Stop" mode.

Regeneration Protection

Eliminates tripping due to high bus voltage caused by rapid deceleration of high inertial loads.

Undervoltage and Overvoltage Protection

Shuts down the drive if the AC line input voltage goes above or below the operating range.

Short Circuit Protection

Shuts down the drive if a short circuit occurs at the motor (phase-to-phase).

Basic, Programmable, Trimpot Adjustments

Min. Speed, Max. Speed, Accel, Decel, Current Limit, Slip Comp.

Drive Options

Forward-Stop-Reverse Switch

Provides motor reversing and stop functions.

Signal Isolator

Provides isolation between a non-isolated signal source and the drive.

Auto/Manual Switch

When used with the Signal Isolator, it selects the remote process signal or the Main Speed Potentiometer.



Applications

- Actuators • Air Cleaners • Amusement Rides
- Ball Pitching Machines • Blowers • Boat Lifts
- Bowling Alley Lane Cleaners • CNC • Conveyors
- Door and Gate Openers • Drilling • Duct Cleaners
- Dumbwaiters • Elevators and Hoists
- Exercise Equipment • Fabric Processing • Fans
- Feeders • Film Processing • Floor Cleaning
- Food Processing • Garment Cutting
- Grinding and Polishing • Hoppers • Horse Walkers
- HVAC • Indexers • Irrigation • Laminating
- Lift Station Pumps • Machine Tools
- Medical • Milling • Mixers • Oven Conveyors
- Packaging • Paint Blenders, Shakers, and Sprayers
- Paper Handling • Portable Equipment Used with GFCIs
- Pottery Wheels • Printing
- Pumps • Range Hoods • Sandblasting • Saws
- Sewing • Stretch Wrap • Textile • Treadmills
- Therapeutic Vibrators • Washing Machines
- Wave Soldering • Web Processing • Wheelchair Lifts
- Whole House Vacuums and Attic Fans
- Wire Feeders • Wood and Metal Lathes and Cutters
- Winders and Unwinders

Learn about Build-A-Drive™ KB's "New AC Inverter" Program
www.kbelectronics.com



KB Electronics, Inc.
kbelectronics.com • info@kbelectronics.com

Automation and Control

Ratings

115/230 VAC 1-Phase Input • 230 VAC 3-Phase Output

Model No.	Part No.	Ratings		Net Weight	
		HP, (kW)	Amps	Lbs.	kg
KBMA-24D	9533	1, (0.75)	3.6	2.42	1.09
KBMA-24DF*	9534	1, (0.75)	3.6	2.48	1.12



*"F" Suffix for Built-In Class "A" (CE) RFI (EMI) AC Line Filter.

Specifications

Maximum Load (% of Current Overload for 2 Minutes)	150
Carrier, Switching Frequency (kHz)	16, 8
Output Frequency Resolution (Hz)	0.06
Minimum Output Frequency to Motor (Hz)	0.3
Acceleration Time (Seconds)	0.3 – 20
Deceleration Time (Seconds)	0.3 – 20
Speed Range (Ratio)	60:1
Speed Regulation (30:1 Speed Range, 0 – Full Load) (% Base Speed)	2.5
Stalled Motor Trip Time (Seconds)	6
Braking	DC Injection*
Operating Temperature Range (°C / °F)	0 – 40 / 32 – 104
Storage Temperature (°C / °F)	-25 – +85 / -13 – +185

*Requires factory programming.


Dimensions – (Inches/mm)

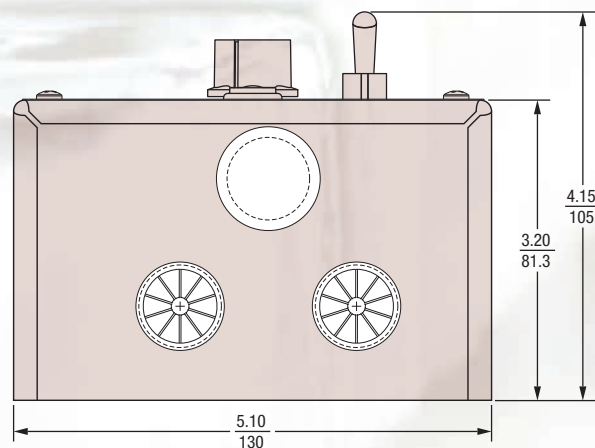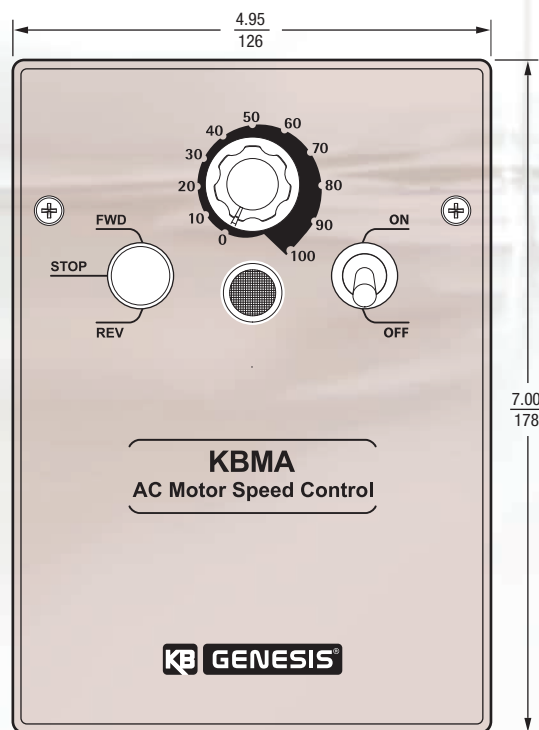

KB Electronics, Inc.
kbelectronics.com • info@kbelectronics.com

Automation and Control

General Connection Diagram

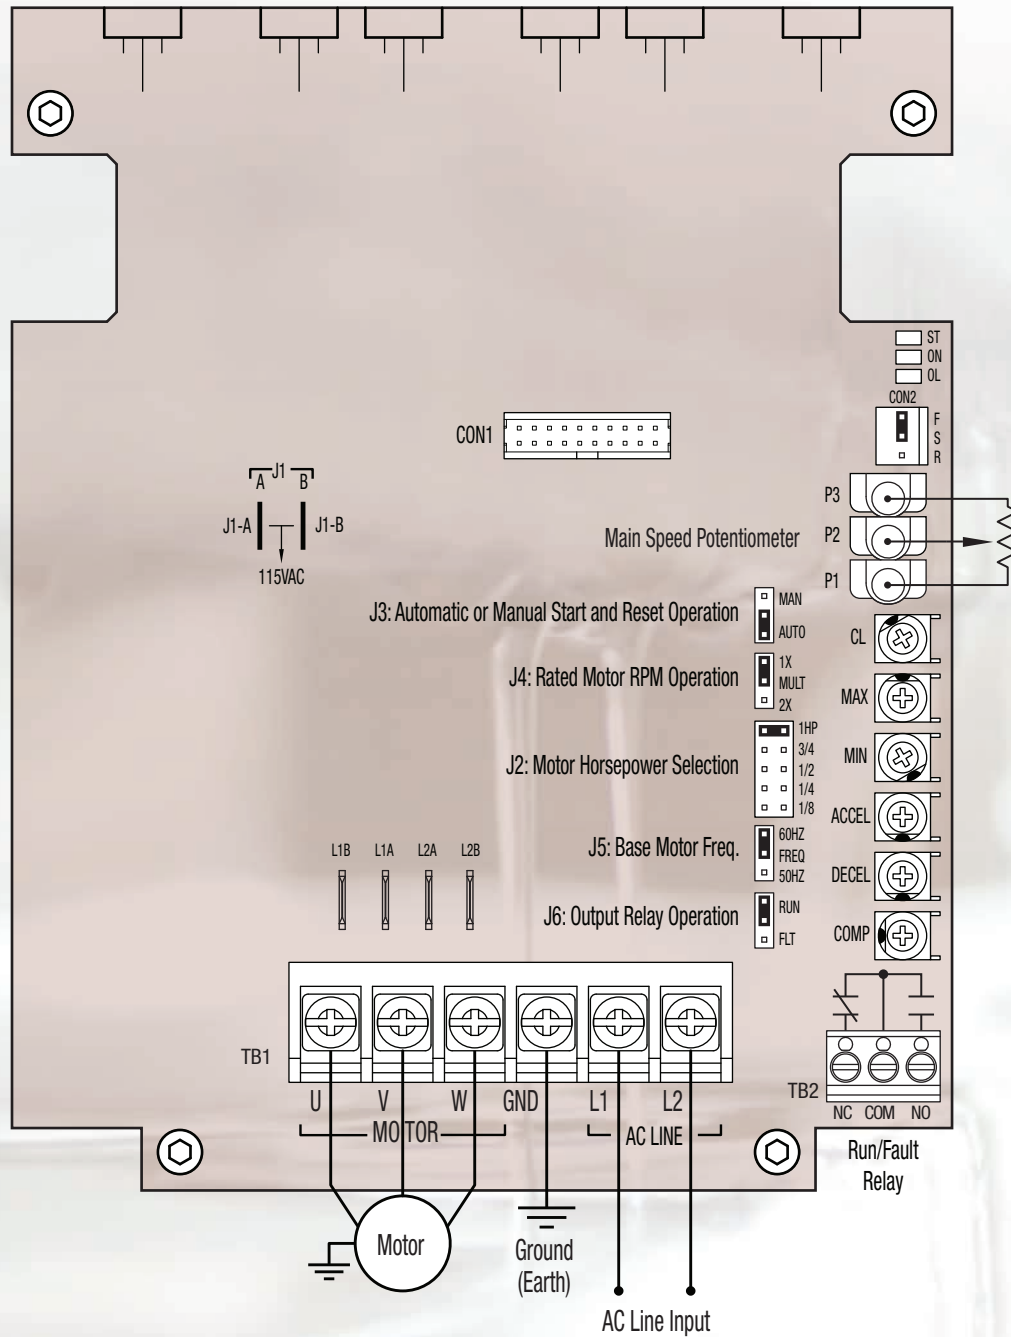

KB ELECTRONICS, INC.
 (954) 346-4900 • Fax (954) 346-3377
 Outside Florida Call Toll Free (800) 221-6570
 info@kbelectronics.com • www.kbelectronics.com

Represented by: