


- NOTES:
1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
 2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
 3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

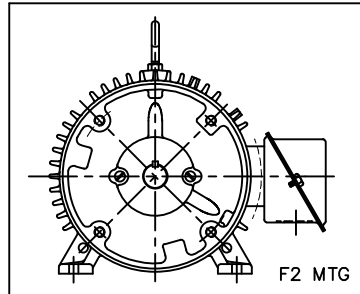

DASH	FRAME	B	C	AG	BS	2F	MOUNTING
575	182T	5.50	16.68	11.75	2.25	4.50	F1 ONLY
675	182T	6.50	17.68	12.75	2.75	5.50	F1 ONLY
675	184T	6.50	17.68	12.75	2.75	5.50	F1 OR F2

		TOLERANCES UNLESS SPECIFIED		LEESON	ELECTRIC MOTORS GEARMOTORS AND DRIVES	DRAWN BLR 05-01-1997
		DEC. INCHES				CHK ML 05-05-1997
		.X ±.1		TITLE OUTLINE		APPD GK 05-05-1997
		.XX ±.03		180T FR. - BB - TS - C'FACE		SCALE .3125=1
		.XXX ±.005		MAT'L-REF. B-SS68429-REV.2		REF
		.XXXX ±.0005		FINISH		FMF
NO.	REVISION	BY & DATE	CHK ANG ±7'30"	RFP 05-05-1997	CAD FILE ss68429LE	PREV
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT				DIST LB	SIZE B	DRAWING NO. PAGE OF REV. SS68429LE