


Compact Multiprotocol I/O Module for Ethernet
4 IO-Link Master Channels
4 Universal Digital PNP Channels, 0.5 A, Channel Diagnostics
TBEN-S2-4IOL

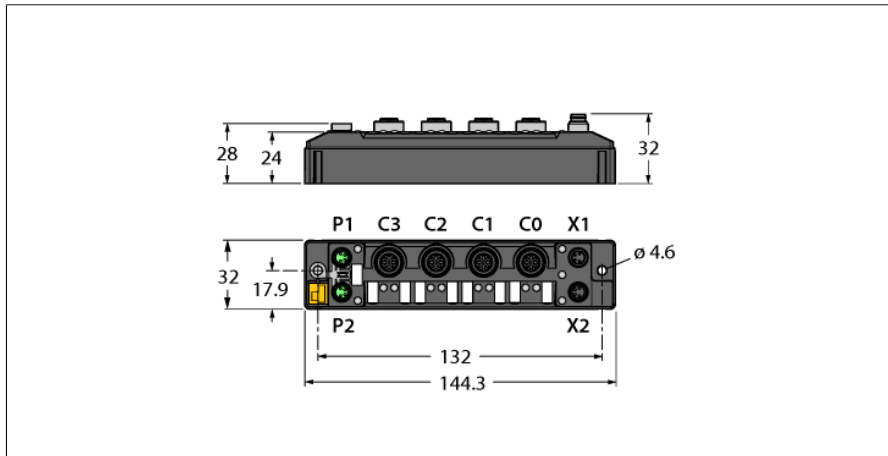

- EtherNet/IP™, Modbus® TCP, or PROFINET® slave
- Integrated Ethernet switch
- 10 Mbps / 100 Mbps supported
- 2 x male M8, 4-pin, Ethernet-Fieldbus connection
- Glass fiber reinforced housing
- Shock and vibration tested
- Fully potted module electronics
- Protection classes IP65, IP67, IP69K
- FLC/ARGEE programmable
- M12 ports for IO-Link Master, 5-pin
- IO-Link protocol 1.1
- Male M8, 4-pin, for power supply
- Separated power groups for safety shutdown

Type designation	TBEN-S2-4IOL
Ident-No.	6814024

Supply	
Supply voltage	24 VDC
Admissible range	18...30 VDC
	total current of max. 4 A per voltage group
	IO-Link 20.4...28.8 VDC
Voltage supply connection	2 x M8, 4-pin
Operating current	V1: min. 50 mA, max. 110 mA V2: min. 10 mA, max. 115 mA
Sensor/Actuator supply V_{AUX2}	supply of ports C0-C3 from V2
Electrical isolation	not short-circuit proof, max. 4 A per group C0-C3 galvanic isolation of the voltage groups V1 and V2, voltages up to 500 VAC

System data	
Fieldbus transmission rate	10 Mbps/100 Mbps
Fieldbus connection technology	2 x M8, 4-pin
Protocol detection	automatic
Web server	default: 192.168.1.254
Service Interface	Ethernet via P1 or P2

Field Logic Controller (FLC)	
Supported from firmware version	3.1.10.0
Released from ARGEE version	2.0.25.0

Modbus TCP	
Addressing	Static IP, BOOTP, DHCP
Supported function codes	FC1, FC2, FC3, FC4, FC5, FC6, FC15, FC16, FC23
Number of TCP connections	8
Input register start address	0 (0x0000 hex)
Output register start address	2048 (0x0800 hex)

EtherNet/IP™	
Addressing	acc. to EtherNet/IP™ specification
Quick Connect (QC)	< 500 ms
Device Level Ring (DLR)	supported
Number of TCP connections	3
Number of CIP connections	10
Input Assembly Instance	103
Output Assembly Instance	104
Configuration Assembly Instance	106

Compact Multiprotocol I/O Module for Ethernet

4 IO-Link Master Channels

4 Universal Digital PNP Channels, 0.5 A, Channel Diagnostics

TBEN-S2-4IOL

PROFINET

Addressing	DCP
Conformance class	B (RT)
MinCycleTime	1 ms
Fast Start-Up (FSU)	< 500 ms
Diagnostics	acc. to PROFINET alarm handling
Topology detection	supported
Automatic addressing	supported
Media Redundancy Protocol (MRP)	supported

Digital inputs

Number of channels	4 DXP + 4 SIO
Connectivity inputs	M12, 5-pin
Input type	PNP
Type of input diagnostics	channel diagnostics
Switching threshold	EN 61131-2 Typ 3, PNP
Low level signal voltage	< 5 V
High level signal voltage	> 11 V
Low level signal current	< 1.5 mA
High level signal current	> 2 mA
Input delay	0.05 ms
Potential separation	galvanic isolation to the bus voltages up to 500 VAC

Digital outputs

Number of channels	4 DXP
Connection Technology Outputs	M12, 5-pol
Output type	PNP
Type of output diagnostics	channel diagnostics
Output voltage	24 VDC from potential group
Output current per channel	0.5 A, short-circuit proof
Load type	resistive, inductive, lamp load
Potential separation	galvanic isolation to P1/P2 voltages up to 500 VDC

IO-Link

Number of channels	4
IO-Link	pin 4 in IOL mode
IO-Link specification	Version 1.1
IO-Link port type	Class A
Frame type	supports all specified frame types
Supported devices	max. 32 byte input/32 byte output
Transmission rate	4.8 kbps (COM 1) / 38.4 kbps (COM 2) / 230 kbps (COM 3)

Standard/Directive conformity

Vibration test	acceleration to 20 g acc. to EN 60068-2-6
Shock test	acc. to EN 60068-2-27
Drop and topple	acc. to EN 60068-2-31/IEC 60068-2-32
Electro-magnetic compatibility	acc. to EN 61131-2
Approvals and certificates	CE
UL conditions	cULus LISTED 21 W2, Encl.Type 1 IND.CONT.EQ.

General Information

Dimensions (W x L x H)	32 x 144 x 32mm
Operating temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Altitude	max.5000 m
Protection class	IP65 IP67 IP69K
MTTF	260 years acc. to SN 29500 (Ed. 99) 20 °C
Housing material	PA6-GF30
Housing color	Black
Material label	Polycarbonate
Halogen-free	yes
Mounting	2 mounting holes □ 4.6 mm

Compact Multiprotocol I/O Module for Ethernet
4 IO-Link Master Channels
4 Universal Digital PNP Channels, 0.5 A, Channel Diagnostics
TBEN-S2-4IOL



Note the numbering of the IO range:
From firmware version 3.1.10.0 and higher ports C0 to C3 and channels CH0 to CH3 are counted. For more details on the corresponding change see manual.

Compact Multiprotocol I/O Module for Ethernet
4 IO-Link Master Channels
4 Universal Digital PNP Channels, 0.5 A, Channel Diagnostics
TBEN-S2-4IOL

	<p>Accessories</p> <p>It is strongly recommended to use only ready-made Ethernet cables!</p> <p>Ethernet cable (example):</p> <p>M8-M8: PSGS4M-PSGS4M-4413-1M Ident. no. U-55718</p> <p>M8-RJ45: PSGS4M-RJ45S-4413-1M Ident. no.: U-55725</p> <p>M8-M12: RSSD-PSGS4M-4413-1M Ident. no.: U-58840</p>	<p>M8 x 1 Ethernet</p>
	<p>Accessories</p> <p>Pin 1: V_{AUX2} is not short-circuit proof</p> <p>Pin 2: Digital input or output</p> <p>Pin 4: IO-Link or digital input</p> <p>Accessories:</p> <p>Appropriate IO-Link cable for example:</p> <p>Ident. no. 6625604 2 m: RKC4T-2-RSC4T/TXL</p> <p>Ident. no. 6625730 5m: RKC4T-5-RSC4T/TXL</p> <p>Further lengths and variants on request or see product catalog</p> <p>External supply for class B device:</p> <p>Ident. no. 6629516 VB-IO-LINK-CLASS-B-POWER-0,3/0,3/TXL</p> <p>For the external supply also observe the instructions in the manual!</p>	<p>M12 x 1 I/O Port</p>
	<p>Accessories</p> <p>Power supply cable (example):</p> <p>M8-M8 2 m</p> <p>PKG 4M-2-PSG 4M</p> <p>Ident. no. U99-10815</p>	<p>M8 x 1 Voltage Supply</p>

Compact Multiprotocol I/O Module for Ethernet
4 IO-Link Master Channels
4 Universal Digital PNP Channels, 0.5 A, Channel Diagnostics
TBEN-S2-4IOL



Industrial
Automation

Module LED Status

LED	Color	Status	Description
ETH1 / ETH2	Green	ON	Ethernet link (100 Mbps)
		flashing	Ethernet communication (100 Mbps)
	Yellow	ON	Ethernet link (10 Mbps)
		flashing	Ethernet communication (10 Mbps)
		OFF	No Ethernet link
BUS	Green	ON	Active connection to a master
		Flashing	Steady flashing: Ready Sequence of 3 flashes in 2 seconds: FLC/ARGEE active
	Red	ON	IP address conflict or Restore Mode or Modbus timeout
		Flashing	Blink/Wink command active
	Red/ Green	Alternating	Waiting for assignment of an IP address, DHCP or BootP
	OFF	Power off	
ERR	Green	ON	Diagnostics disabled
	Red	ON	Diagnostics enabled V_2 undervoltage diagnosis is parameter-dependent
PWR	Green	ON	V_1 and V_2 power on
	Red	ON	V_2 power off or below defined tolerance of 18 V
		OFF	V_1 power off or below defined tolerance of 18 V

LED Status I/O

LED	Color	Status	Description
IOL 0, 2, 4, 6 (IO-Link Port 1-4) IO-Link Mode	Green	flashing	IO-Link communication, process data valid
	Red	flashing	IO-Link communication, process data invalid
		ON	IO-Link supply OK, no IO-Link Communication
	OFF	Port inactive	
IOL 0, 2, 4, 6 (IO-Link Port 1-4) SIO Mode	Green	ON	Digital Input signal is present
		OFF	No input signal
DXP 1, 3, 5, 7	Green	ON	Digital input or output active
		Red	ON
		OFF	Input or output inactive
DXP 7	White	Flashing	Supports blink/wink commands

Compact Multiprotocol I/O Module for Ethernet
4 IO-Link Master Channels
4 Universal Digital PNP Channels, 0.5 A, Channel Diagnostics
TBEN-S2-4IOL

Process Data Mapping of the Single Protocols

For more details on the corresponding protocols see manual.

Modbus TCP Register Mapping

	Reg	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
Inputs (RO)	0x0000	-	-	-	-	-	-	-	-	DXP7 C3P2	SIO6 C3P4	DXP5 C2P2	SIO4 C2P4	DXP3 C1P2	SIO2 C1P4	DXP1 C0P2	SIO0 C0P4	
	0x0001	-	-	-	-	-	-	-	-	-	DVS7	-	DVS5	-	DVS3	-	DVS1	
	0x0002 ... 0x0011	IO-Link Port 1 Byte 0...31																
	0x0012 ... 0x0021	IO-Link Port 2 Byte 0...31																
	0x0022 ... 0x0031	IO-Link Port 3 Byte 0...31																
	0x0032 ... 0x0041	IO-Link Port 4 Byte 0...31																
Diag Port1	0x0042	GEN-ER	OVL	VHIGH	VLOW	ULVE	LLVU	OTMP	PRMER	EVT2	EVT1	PDINV	HWER	DSE	CFGER	PPE	-	
Diag Port2	0x0043	GEN-ER	OVL	VHIGH	VLOW	ULVE	LLVU	OTMP	PRMER	EVT2	EVT1	PDINV	HWER	DSE	CFGER	PPE	-	
Diag Port3	0x0044	GEN-ER	OVL	VHIGH	VLOW	ULVE	LLVU	OTMP	PRMER	EVT2	EVT1	PDINV	HWER	DSE	CFGER	PPE	-	
Diag Port4	0x0045	GEN-ER	OVL	VHIGH	VLOW	ULVE	LLVU	OTMP	PRMER	EVT2	EVT1	PDINV	HWER	DSE	CFGER	PPE	-	
Diag DXP	0x0046	-	-	-	-	-	-	-	-	ERR7	-	ERR6	-	ERR4	-	ERR1	-	
IOL Events	0x0047	Port									Qualifier							
	0x0048	eventCode MSB									eventCode LSB							
	...																	
	0x0065	Port									Qualifier							
	0x0066	eventCode MSB									eventCode LSB							
Status (RO)	0x0067		FCE					V1		V2							DIAG	

Outputs (RO)	0x0800	-	-	-	-	-	-	-	-	DXP7 C3P2	-	DXP5 C2P2	-	DXP3 C1P2	-	DXP1 C0P2	-
	0x0801 ... 0x0810	IO-Link Port 1 Byte 0...31															
	0x0811 ... 0x0820	IO-Link Port 2 Byte 0...31															
	0x0821 ... 0x0830	IO-Link Port 3 Byte 0...31															
	0x0831 ... 0x0840	IO-Link Port 4 Byte 0...31															

EtherNet/IP Data Mapping

	Word	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Input Data (Station -> Scanner)																	
Status Word	0x0000	-	FCE	-	-	-	-	V1	-	V2	-	-	-	-	-	-	Diag
Inputs (RO)	0x0001	-	-	-	-	-	-	-	-	DXP7 C3P2	SIO6 C3P4	DXP5 C2P2	SIO4 C2P4	DXP3 C1P2	SIO2 C1P4	DXP1 C0P2	SIO0 C0P4
	0x0002	-	-	-	-	-	-	-	-	-	DVS6	-	DVS4	-	DVS2	-	DVS0
	0x0003 ... 0x0012	IO-Link Port 1 Byte 0...31															
	0x0013 ... 0x0022	IO-Link Port 2 Byte 0...31															

Compact Multiprotocol I/O Module for Ethernet
4 IO-Link Master Channels
4 Universal Digital PNP Channels, 0.5 A, Channel Diagnostics
TBEN-S2-4IOL



Industrial
Automation

	0x0023 ... 0x0032	IO-Link Port 3 Byte 0...31																
	0x0033 ... 0x0042	IO-Link Port 4 Byte 0...31																
Diag DXP	0x0043	-	-	-	-	-	-	-	-	-	ERR7	-	ERR5	-	ERR3	-	ERR1	-
Diag Port1	0x0044	GEN-ER	OVL	VHIGH	VLOW	ULVE	LLVU	OTMP	PRMEREVT2	EVT1	PDINV	HWER	DSER	CFGER	PPE	-	-	-
Diag Port2	0x0045	GEN-ER	OVL	VHIGH	VLOW	ULVE	LLVU	OTMP	PRMEREVT2	EVT1	PDINV	HWER	DSER	CFGER	PPE	-	-	-
Diag Port3	0x0046	GEN-ER	OVL	VHIGH	VLOW	ULVE	LLVU	OTMP	PRMEREVT2	EVT1	PDINV	HWER	DSER	CFGER	PPE	-	-	-
Diag Port4	0x0047	GEN-ER	OVL	VHIGH	VLOW	ULVE	LLVU	OTMP	PRMEREVT2	EVT1	PDINV	HWER	DSER	CFGER	PPE	-	-	-
IOL Events	0x0048	Port									Qualifier							
	0x0049	eventCode MSB									eventCode LSB							
	...																	
	0x0066	Port									Qualifier							
	0x0067	eventCode MSB									eventCode LSB							

Output Data (Scanner -> Station)																	
Command Word	0x0000	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Outputs (RO)	0x0001	-	-	-	-	-	-	-	-	DXP7 C3P2	-	DXP5 C2P2	-	DXP3 C1P2	-	DXP1 C0P2	-
	0x0002 ... 0x0013	IO-Link Port 1 Byte 0...31															
	0x0014 ... 0x0022	IO-Link Port 2 Byte 0...31															
	0x0023 ... 0x0032	IO-Link Port 3 Byte 0...31															
	0x0033 ... 0x0042	IO-Link Port 4 Byte 0...31															

PROFINET Register Mapping

	Byte	MSB								LSB							
		Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Inputs (RO)	0x00 LSB	-	-	-	-	-	-	-	-	DXP7	SIO6	DXP5	SIO4	DXP3	SIO2	DXP1	SIO0
	0x01 MSB	-	-	-	-	-	-	-	-	C3P2	C3P4	C2P2	C2P4	C1P2	C1P4	C0P2	C0P4
	0x02 LSB	-	-	-	-	-	-	-	-	-	DVS6	-	DVS4	-	DVS2	-	DVS0
	0x03 MSB	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	0x04 LSB ... 0x23 MSB	IO-Link Port 1 Byte 0...31															
	0x24 LSB ... 0x43 MSB	IO-Link Port 2 Byte 0...31															
	0x44 LSB ... 0x63 MSB	IO-Link Port 3 Byte 0...31															
	0x64 LSB ... 0x83 MSB	IO-Link Port 4 Byte 0...31															
Diag Port1	0x84 LSB 0x85 MSB	GEN-ER	OVL	VHIGH	VLOW	ULVE	LLVU	OTMP	PRMEREVT2	EVT1	PDINV	HWER	DSER	CFGER	PPE	-	-
Diag Port2	0x0086 LSB 0x0087	GEN-ER	OVL	VHIGH	VLOW	ULVE	LLVU	OTMP	PRMEREVT2	EVT1	PDINV	HWER	DSER	CFGER	PPE	-	-

Compact Multiprotocol I/O Module for Ethernet
4 IO-Link Master Channels
4 Universal Digital PNP Channels, 0.5 A, Channel Diagnostics
TBEN-S2-4IOL

Diag Port3	0x88 LSB 0x89 MSB	GEN-ER	OVL	VHIGH	VLOW	ULVE	LLVU	OTMP	PRMER	EVT2	EVT1	PDINV	HWER	DSER	CFGER	PPE	-	
Diag Port4	0x90 LSB 0x91 MSB	GEN-ER	OVL	VHIGH	VLOW	ULVE	LLVU	OTMP	PRMER	EVT2	EVT1	PDINV	HWER	DSER	CFGER	PPE	-	
Diag DXP	0x92 LSB 0x93 MSB	-	-	-	-	-	-	-	-	ERR7	-	ERR5	-	ERR3	-	ERR1	-	
IOL Events	0x94 LSB 0x95 MSB	Port								Qualifier								
	0x96 LSB 0x97 MSB	eventCode MSB								eventCode LSB								
	...																	
	0xCA LSB 0xCB MSB	Port								Qualifier								
	0xCC LSB 0xCD MSB	eventCode MSB								eventCode LSB								
Status (RO)	0x94 LSB 0x95 MSB	-	FCE	-	-	-	-	V1	-	V2	-	-	-	-	-	-	-	DIAG

Outputs (RO)	0x00 LSB 0x01 MSB	-	-	-	-	-	-	-	-	DXP7 C3P2	-	DXP5 C2P2	-	DXP3 C1P2	-	DXP1 C0P2	-
	0x02 LSB 0x03 MSB	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	0x04 LSB ... 0x23 MSB	IO-Link Port 1 Byte 0...31															
	0x24 LSB ... 0x43 MSB	IO-Link Port 2 Byte 0...31															
	0x44 LSB ... 0x63 MSB	IO-Link Port 3 Byte 0...31															
	0x64 LSB ... 0x83 MSB	IO-Link Port 4 Byte 0...31															

Key:

V1	Undervoltage V1	CFG	I/O configuration error
V2	Undervoltage V2	FCE	I/O-ASSISTANT Force Mode active
Cx	Port x	Px	Pin x
I/ODiag	I/O diagnostics connected	DVS	Data Valid Signal
Diag	Diagnostic at least on 1 channel	ERR x	Overcurrent output
GENER	Common error	OVL	Overload
VHIGH	Overvoltage	VLOW	Undervoltage
ULVE	Upper limit value exceeded	LLVU	Lower limit value underrun
OTMP	Overtemperature	PRMER	Parameterization error
EVT2	Out of specification error	EVT1	Maintenance events
PDINV	Process input data invalid	HWER	Hardware error
DSER	Data storage error	CFGer	Wrong or missing device
PPE	Port parameterization error		