


# ABB Component Drives

## ACS150, 0.5 to 5 Hp

### Technical Catalog

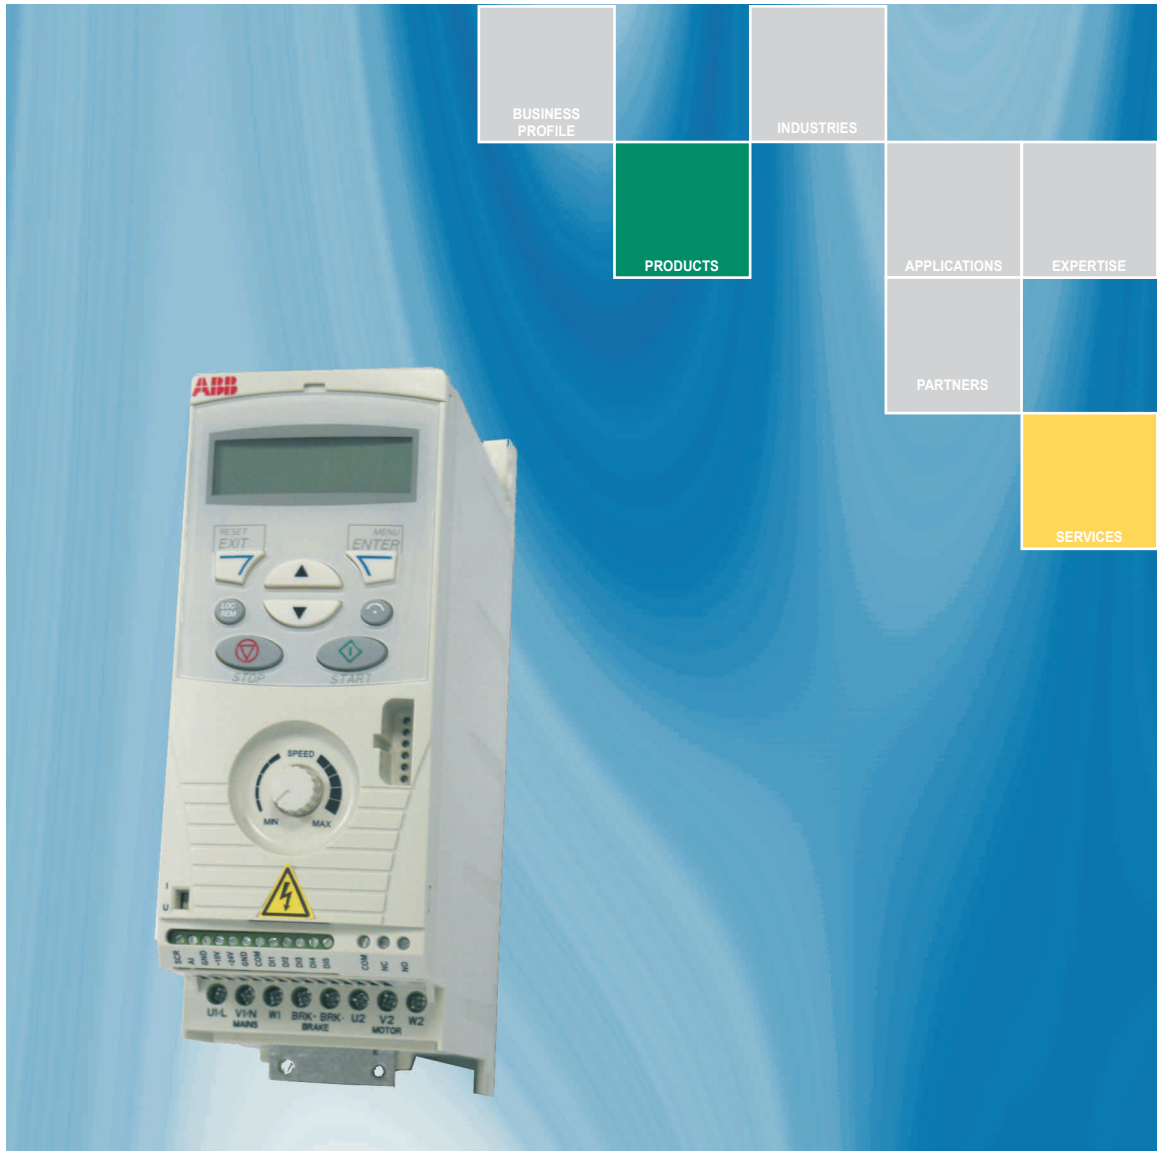


# Contents



**Choice 1:** Simply contact your local ABB drives sales office and let them know what you want. Use page 4 as a reference section for more information.

**OR**

**Choice 2:** Build up your own ordering code using the simple 7-step approach below. Then, contact your local ABB Drives sales office.

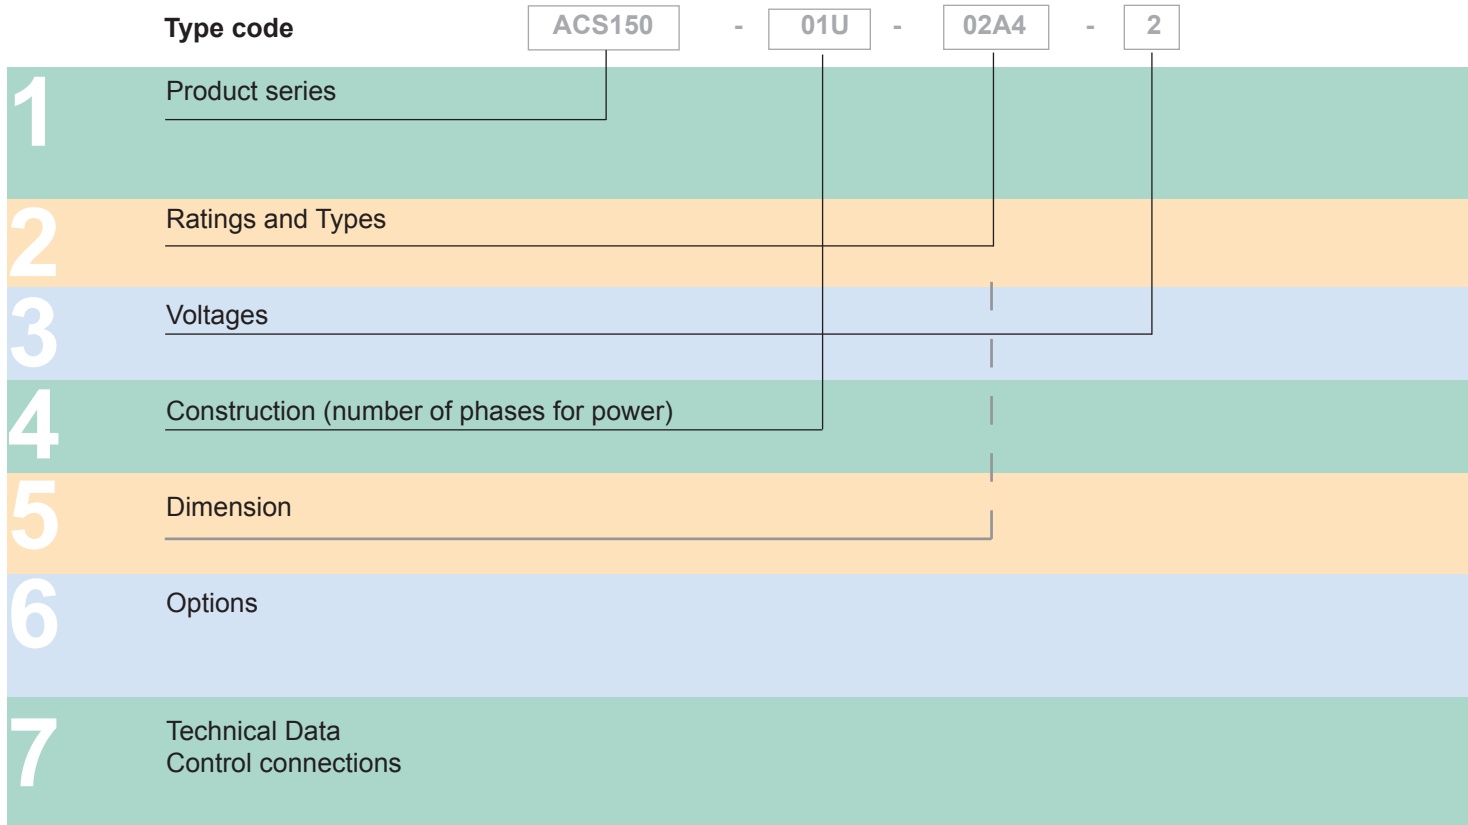



## ABB Component Drive, ACS150

|   |   |          |
|---|---|----------|
| ABB Component Drives.....                 | 4 | <b>1</b> |
| Features .....                            | 4 |          |
| Technical Specification .....             | 5 |          |
| Output current rating .....               | 6 | <b>2</b> |
| Input voltage rating .....                | 6 | <b>3</b> |
| Phases.....                               | 6 | <b>4</b> |
| Electro Magnetic Compatibility (EMC)..... | 6 |          |
| Dimensions.....                           | 6 | <b>5</b> |
| FlashDrop.....                            | 7 | <b>6</b> |
| NEMA 1 kit.....                           | 7 |          |
| Brake resistors.....                      | 8 |          |
| Cooling .....                             | 8 | <b>7</b> |
| Fuse selections.....                      | 8 |          |
| Connection examples .....                 | 9 |          |

# ABB Component Drives



ACS150 - 01U - 02A4 - 2

## What is the ACS150 customer value?

- **Dramatically reduced programming time and costs**
  - Replicate parameters in seconds with no power to the drive with new FlashDrop technology
  - Pre-configure drives prior to delivery
  - Replicate parameter sets across machines
  - Hide selected parameters
  - Spare drives are configured
- **Optimal installation layout with unified height and depth for all frames.**
- **Reduced cost with built-in brake chopper and EMC filter**
- **Reduced wiring time and costs for I/O and quick, simple and easy access control connections**

The ABB component drives meet the requirements of OEMs, system integrators and panel builders. It is a component that is bought together with other components. The drive is stocked, and the number of options and variants are optimized for distribution.

## Where can it be used?

ABB component drives are designed to meet the requirements of an extensive range of machinery applications. The drive is ideal for food and beverage, material handling, textile, printing, rubber and plastics and woodworking applications.

## Highlights

- FlashDrop- easy to set and select parameters without power
- Integral operator interface - clear display with buttons
- Integral potentiometer for frequency setting
- Integrated EMC filter for 2nd environment
- Built-in brake chopper as standard
- Coated boards as standard
- Unified height and depth
- NEMA 1 Kit
- Flexible installation
- RoHS (verify label)

## Applications

- Fans
- Pumps
- Gate control
- Material handling
- Conveyors

## What are the ACS150's main features and benefits supporting customer value?

| Features               | Benefits   | Notes  |
|------------------------|--|--|
| FlashDrop              | Easy and time-saving.<br>Cost-saving for machine builders.                               | Fast and trouble free parameter set up without power.  |
| Fixed interface        | Integrated non-removable control panel.<br>Clear LCD display with backlight and buttons. | Simple to use  |
| Fixed potentiometer    | Integrated potentiometer.<br>Settings shown on the control panel                         | Easy speed setting.  |
| Built-in EMC filter    | No extra space, parts, time and cost required  | 2 <sup>nd</sup> environment built in filter complying with IEC61800-3 as standard  |
| Built-in brake chopper | Reduced cost.<br>Gives freedom to choose the resistor supplier.                          | 100% braking capability.   |
| Flexible installation  | All units fit in the same sized cabinet  | Unified height and depth for all frame sizes for optimal use of cabinet space.<br>Sideways, side by side and DIN-rail mounting configuration |
| Coated boards          | Longer lifetime in hostile environments.<br>Reduced service.                             | Protection against moisture and hostile particles as standard  |



# Technical Specification

ACS150 - 01U - 02A4 - 2

## Input power connection

|                                |  |
|--------------------------------|--|
| <b>Voltage and power range</b> | 1-phase, 200 to 240 V $\pm 10\%$<br>0.37 to 2.2 kW (0.5 to 3 hp)<br>3-phase, 200 to 240 V $\pm 10\%$<br>0.37 to 2.2 kW (0.5 to 3 hp)<br>3-phase, 380 to 480 V $\pm 10\%$<br>0.37 to 4 kW (0.5 to 5 hp) |
| <b>Frequency</b>               | 48 to 63 Hz  |
| <b>Power factor</b>            | 0.98   |

## Motor connection

|   |   |
|---|---|
| <b>Voltage</b>  | 3-phase, from 0 to $U_{supply}$   |
| <b>Frequency</b>  | 0 to 500 Hz   |
| <b>Continuous loading capability</b><br><small>(constant torque at a max. ambient temperature 40°C)</small> | Rated output current $I_{2N}$   |
| <b>Overload capability</b><br><small>(at a max. ambient temperature of 40°C)</small>                        | At heavy duty use $1.5 \times I_{2N}$ for 1 minute every 10 minutes<br>At start $1.8 \times I_{2N}$ for 2 s |
| <b>Switching frequency</b>  |   |
| Default   | 4 kHz   |
| Selectable  | 4 to 12 kHz with 4 kHz steps (16 kHz, v1.31b+)  |
| <b>Acceleration time</b>  | 0.1 to 1800 s   |
| <b>Deceleration time</b>  | 0.1 to 1800 s   |
| <b>Braking</b>  | Inbuilt brake chopper standard (100% braking capability)  |

## Environmental limits

|                             |  |
|-----------------------------|--|
| <b>Ambient temperature</b>  | -10 to 40°C (14 to 104°F), no frost allowed, 50°C (122°F) with 10% derating  |
| <b>Altitude</b>             |  |
| Output current              | Rated current available at 0 to 1000 m (0 to 3281 ft) reduced by 1% per 100 m (328 ft) over 1000 to 2000 m (3281 to 6562 ft) |
| <b>Relative humidity</b>    | Lower than 95% (without condensation)  |
| <b>Protection class</b>     | IP 20 / Protected Chassis  |
| <b>Enclosure color</b>      | NCS 1502-Y, RAL 9002, PMS 420 C  |
| <b>Contamination levels</b> | IEC721-3-3   |
| Transportation              | No conductive dust allowed<br>Class 1C2 (chemical gases)<br>Class 1S2 (solid particles)                                      |
| Storage                     | Class 2C2 (chemical gases)<br>Class 2S2 (solid particles)  |
| Operation                   | Class 3C2 (chemical gases)<br>Class 3S2 (solid particles)  |

## Programmable control connections

|                            |   |
|----------------------------|---|
| <b>One analog input</b>    |   |
| Voltage signal             | 0 (2) to 10 V, $R_{in} > 312 \text{ k}\Omega$   |
| Current signal             | 0 (4) to 20 mA, $R_{in} = 100 \Omega$   |
| Resolution                 | 0.1 %   |
| Accuracy                   | $\pm 1\%$   |
| Potentiometer reference    | 10V $\pm 1\%$ max, 10 mA $R < 10 \text{ k}\Omega$                                     |
| <b>Auxiliary voltage</b>   | 24 V DC $\pm 10\%$ , max. 200 mA  |
| <b>Five digital inputs</b> | 12 to 24 V DC with internal or external supply, PNP and NPN, pulse train 0 to 16 kHz. |
| Input impedance            | 2.4 k $\Omega$  |
| <b>One relay output</b>    |   |
| Type                       | NO + NC   |
| Maximum switching voltage  | 250 V AC/30 V DC  |
| Maximum switching current  | 0.5 A/30 V DC; 5 A/230 V AC   |
| Maximum continuous current | 2 A rms   |

## Product compliance

|  |
|--|
| Low voltage Directive 73/23/EEC with supplements |
| Machinery Directive 98/37/EC                     |
| EMC Directive 89/336/EEC with supplements        |
| Quality assurance system ISO 9001                |
| Environmental system ISO 14001                   |
| UL, cUL, and CE approvals, C-Tick, GOST-R        |

## EMC (according to EN61800-3)

|  |
|--|
| 2 <sup>nd</sup> environment filter, unrestricted distribution with 30 m (98 ft) cable, built-in as standard. |
|--|

## EMC standards in general

| EN 61800-3/A11 (2000), product standard                | EN 61800-3 (2004), product standard | EN 55011, product family standard for industrial, scientific and medical (ISM) equipment |
|--|-------------------------------------|--|
| 1 <sup>st</sup> environment, unrestricted distribution | Category C1                         | Group 1 Class B  |
| 1 <sup>st</sup> environment, restricted distribution   | Category C2                         | Group 1 Class A  |
| 2 <sup>nd</sup> environment, unrestricted distribution | Category C3                         | Group 2 Class A  |
| 2 <sup>nd</sup> environment, restricted distribution   | Category C4                         | Not applicable   |

# Ratings, Types, Voltages and Construction



ACS150 - 01U - 02A4 - 2

## Type code

This is a unique reference number that clearly identifies the drive by power rating, voltage, and construction. Once you have selected the type code, the frame size can be used to determine the drives dimensions, shown below.

## Voltages

The ACS150 is available in two voltage ranges:

2 = 200 - 240 V

4 = 380 - 480 V

## Construction

"01U" and "03U" within the type code indicates the number of phases for power.

01 = 1-phase (200 - 240V only)

03 = 3-phase (200 - 240V and 380 - 480V)

U = EMC filter disconnected, 60 Hz motor data  
(In case the filter is required it can easily be connected.)

| Type code                                       | Frame size | Ratings           |                   |                   |
|---|------------|-------------------|-------------------|-------------------|
|   |            | P <sub>N</sub> hp | P <sub>N</sub> kW | I <sub>2N</sub> A |
| <b>1-phase supply voltage 200 - 240 V units</b> |            |                   |                   |                   |
| ACS150-01U-02A4-2                               | R0         | 0.5               | 0.37              | 2.4               |
| ACS150-01U-04A7-2                               | R1         | 1                 | 0.75              | 4.7               |
| ACS150-01U-06A7-2                               | R1         | 1.5               | 1.1               | 6.7               |
| ACS150-01U-07A5-2                               | R2         | 2                 | 1.5               | 7.5               |
| ACS150-01U-09A8-2                               | R2         | 3                 | 2.2               | 9.8               |
| <b>3-phase supply voltage 200 - 240 V units</b> |            |                   |                   |                   |
| ACS150-03U-02A4-2                               | R0         | 0.5               | 0.37              | 2.4               |
| ACS150-03U-03A5-2                               | R0         | 0.75              | 0.55              | 3.5               |
| ACS150-03U-04A7-2                               | R1         | 1                 | 0.75              | 4.7               |
| ACS150-03U-06A7-2                               | R1         | 1.5               | 1.1               | 6.7               |
| ACS150-03U-07A5-2                               | R1         | 2                 | 1.5               | 7.5               |
| ACS150-03U-09A8-2                               | R2         | 3                 | 2.2               | 9.8               |
| <b>3-phase supply voltage 380 - 480 V units</b> |            |                   |                   |                   |
| ACS150-03U-01A2-4                               | R0         | 0.5               | 0.37              | 1.2               |
| ACS150-03U-01A9-4                               | R0         | 0.75              | 0.55              | 1.9               |
| ACS150-03U-02A4-4                               | R1         | 1                 | 0.75              | 2.4               |
| ACS150-03U-03A3-4                               | R1         | 1.5               | 1.1               | 3.3               |
| ACS150-03U-04A1-4                               | R1         | 2                 | 1.5               | 4.1               |
| ACS150-03U-05A6-4                               | R1         | 3                 | 2.2               | 5.6               |
| ACS150-03U-08A8-4                               | R1         | 5                 | 4                 | 8.8               |

## Dimensions, weight and noise

| Frame Size | H1 (in) | H2 (in) | H3 (in) | W (in) | D (in) | Weight (lbs)          | Noise level dBA |
|------------|---------|---------|---------|--------|--------|-----------------------|-----------------|
| R0         | 6.65    | 7.95    | 9.41    | 2.76   | 5.59   | 2.4                   | 50              |
| R1         | 6.65    | 7.95    | 9.41    | 2.76   | 5.59   | 2.9/2.6 <sup>1)</sup> | 60              |
| R2         | 6.65    | 7.95    | 9.41    | 4.13   | 5.59   | 3.3                   | 60              |

<sup>1)</sup> U<sub>N</sub>=200...240 V: 1.3 kg / 2.9 lb, U<sub>N</sub>=380...480 V: 1.2 kg / 2.6 lb

| Frame Size | H4 (in) | H5 (in) | W (in) | D (in) | Weight (lbs)          | Noise level dBA |
|------------|---------|---------|--------|--------|-----------------------|-----------------|
| R0         | 10.12   | 11.02   | 2.76   | 5.59   | 3.3                   | 50              |
| R1         | 10.12   | 11.02   | 2.76   | 5.59   | 3.7/3.5 <sup>2)</sup> | 60              |
| R2         | 10.12   | 11.10   | 4.13   | 5.59   | 4.2                   | 60              |


<sup>2)</sup> U<sub>N</sub>=200...240 V: 1.7 kg / 3.7 lb, U<sub>N</sub>=380...480 V: 1.6kg / 3.5 lb

### NOTES:

- H1 = Height without fastenings and clamping plate.
- H2 = Height with fastenings but without clamping plate.
- H3 = Height with fastenings and clamping plate.
- H4 = Height with fastenings and NEMA 1 connection box.
- H5 = Height with fastenings, NEMA 1 connection box and hood.
- W = Width
- D = Depth

### Cabinet-mounted drives (UL open)


### Wall-mounted drives (NEMA 1)

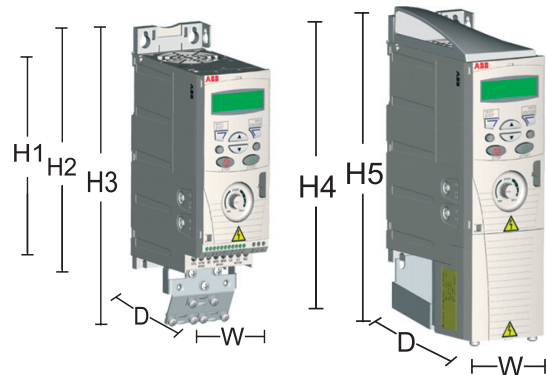



# Interface

ACS150 - 01U - 02A4 - 2

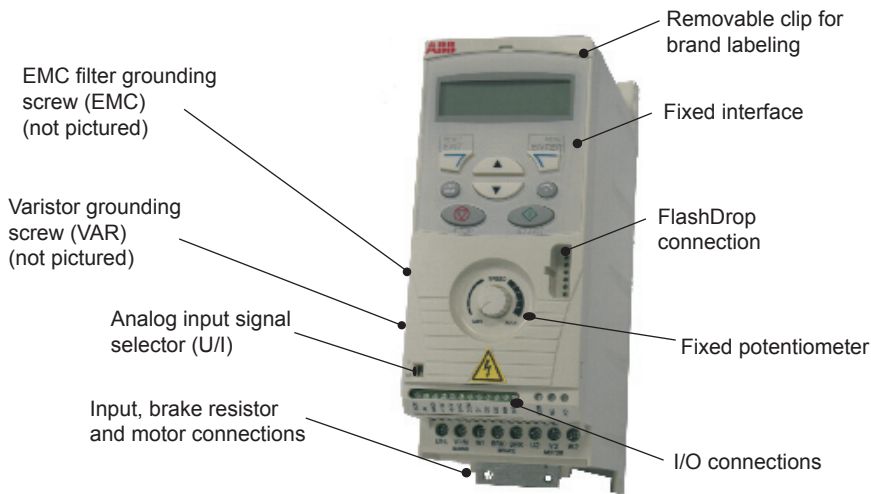

## Options

### FlashDrop (MFDT-01)

FlashDrop (MFDT-01) is a powerful palm sized tool for fast and easy parameter selecting and setting. This tool can be used to download parameters to a drive in as little as two seconds. Using this tool, it is also possible to hide selected parameters to protect the machine. Only the parameters needed in the application are shown. FlashDrop does not require the drive to be powered. The drives shipping container is also designed to allow use of the FlashDrop tool without removing the drive. The MFDT-01 includes the DrivePM (Drive Parameter Manager) software tool to create, edit and copy parameter sets.



FlashDrop (MFDT-01)

#### DrivePM requirements

- Windows 2000/XP
- Free serial port from a PC

#### FlashDrop tool includes

- FlashDrop
- DrivePM software on a CD-rom
- User's manual in pdf-format on the previous CD-rom
- Cable for connection between the PC and FlashDrop
- Battery charger

### NEMA 1 Kit (MUL1-R1)

The NEMA 1 kit MUL1-R1 includes a conduit box and hood for protection against dirt and dust. The MUL1-R1 covers all ACS150 frame sizes.



ACS150 with MUL1-R1 NEMA 1 kit

# Options



## Brake resistors

All ACS150 drives are configured with a built-in brake chopper capable of 100% braking. By connecting an external resistor you can enable the dynamic braking function. The minimum and maximum resistance and the required power is shown in the table. Ensure the resistor purchased does not exceed the maximum resistance nor is smaller than the minimum resistance. For more information about the selection of brake resistors, see the *ACS150 User's Manual (3AFE68576032)* and *ACS150 Product Pricing List (ACS150-PNPL01U-EN)*.

## Selection table

| Type code                                       | Frame size | R <sub>min</sub> | R <sub>max</sub> | P <sub>BRmax</sub> |      |
|---|------------|------------------|------------------|--------------------|------|
|   |            | ohm              | ohm              | hp                 | kW   |
| <b>1-phase supply voltage 200 - 240 V units</b> |            |                  |                  |                    |      |
| ACS150-01U-02A4-1                               | R0         | 70               | 390              | 0.5                | 0.37 |
| ACS150-01U-04A7-1                               | R1         | 40               | 200              | 1                  | 0.75 |
| ACS150-01U-06A7-1                               | R1         | 40               | 130              | 1.5                | 1.1  |
| ACS150-01U-07A5-1                               | R2         | 30               | 100              | 2                  | 1.5  |
| ACS150-01U-09A8-1                               | R2         | 30               | 70               | 3                  | 2.2  |
| <b>3-phase supply voltage 200 - 240 V units</b> |            |                  |                  |                    |      |
| ACS150-03U-02A4-2                               | R0         | 70               | 390              | 0.5                | 0.37 |
| ACS150-03U-03A5-2                               | R0         | 70               | 260              | 0.75               | 0.55 |
| ACS150-03U-04A7-2                               | R1         | 40               | 200              | 1                  | 0.75 |
| ACS150-03U-06A7-2                               | R1         | 40               | 130              | 1.5                | 1.1  |
| ACS150-03U-07A5-2                               | R1         | 30               | 100              | 2                  | 1.5  |
| ACS150-03U-09A8-2                               | R2         | 30               | 70               | 3                  | 2.2  |
| <b>3-phase supply voltage 380 - 480 V units</b> |            |                  |                  |                    |      |
| ACS150-03U-01A2-4                               | R0         | 310              | 1180             | 0.5                | 0.37 |
| ACS150-03U-01A9-4                               | R0         | 175              | 800              | 0.75               | 0.55 |
| ACS150-03U-02A4-4                               | R1         | 165              | 590              | 1                  | 0.75 |
| ACS150-03U-03A3-4                               | R1         | 150              | 400              | 1.5                | 1.1  |
| ACS150-03U-04A1-4                               | R1         | 130              | 300              | 2                  | 1.5  |
| ACS150-03U-05A6-4                               | R1         | 100              | 200              | 3                  | 2.2  |
| ACS150-03U-08A8-4                               | R1         | 70               | 110              | 5                  | 4    |

## Technical data

### Cooling

The ACS150 is configured with cooling fans as standard. The cooling air must be free from corrosive materials and must not be above the maximum ambient temperature of 40°C (50°C with derating). For more specific limits, see the Technical specification - Environmental limits in this catalog.

### Cooling air flow

| Type code                                       | Frame size | Heat dissipation |        | Air flow          |                      |
|---|------------|------------------|--------|-------------------|----------------------|
|   |            | W                | BTU/Hr | m <sup>3</sup> /h | ft <sup>3</sup> /min |
| <b>1-phase supply voltage 200 - 240 V units</b> |            |                  |        |                   |                      |
| ACS150-01U-02A4-2                               | R0         | 25               | 85     | -*)               | -*)                  |
| ACS150-01U-04A7-2                               | R1         | 46               | 157    | 24                | 14                   |
| ACS150-01U-06A7-2                               | R1         | 71               | 242    | 24                | 14                   |
| ACS150-01U-07A5-2                               | R2         | 73               | 249    | 21                | 12                   |
| ACS150-01U-09A8-2                               | R2         | 96               | 328    | 21                | 12                   |
| <b>3-phase supply voltage 200 - 240 V units</b> |            |                  |        |                   |                      |
| ACS150-03U-02A4-2                               | R0         | 19               | 65     | -*)               | -*)                  |
| ACS150-03U-03A5-2                               | R0         | 31               | 106    | -*)               | -*)                  |
| ACS150-03U-04A7-2                               | R1         | 38               | 130    | 24                | 14                   |
| ACS150-03U-06A7-2                               | R1         | 60               | 205    | 24                | 14                   |
| ACS150-03U-07A5-2                               | R1         | 62               | 212    | 21                | 12                   |
| ACS150-03U-09A8-2                               | R2         | 83               | 283    | 21                | 12                   |
| <b>3-phase supply voltage 380 - 480 V units</b> |            |                  |        |                   |                      |
| ACS150-03U-01A2-4                               | R0         | 11               | 38     | -*)               | -*)                  |
| ACS150-03U-01A9-4                               | R0         | 16               | 55     | -*)               | -*)                  |
| ACS150-03U-02A4-4                               | R1         | 21               | 72     | 13                | 8                    |
| ACS150-03U-03A3-4                               | R1         | 31               | 106    | 13                | 8                    |
| ACS150-03U-04A1-4                               | R1         | 40               | 137    | 13                | 8                    |
| ACS150-03U-05A6-4                               | R1         | 61               | 208    | 19                | 11                   |
| ACS150-03U-08A8-4                               | R1         | 94               | 321    | 24                | 14                   |

\*) Frame size R0 with free convection cooling.

### Free space requirements

| Enclosure type  | Space above mm/in | Space below mm/in | Space on left/right mm/in |
|-----------------|-------------------|-------------------|---------------------------|
| All frame sizes | 75/2.95           | 75/2.95           | 0/0                       |

### Fuses

Standard fuses can be used with the ACS150. Recommended fuse ratings are shown in the table below.

### Selection table

| Type code                                       | Frame size | IEC Fuses |             | UL Fuses |             |
|---|------------|-----------|-------------|----------|-------------|
|   |            | A         | Fuse type*) | A        | Fuse type*) |
| <b>1-phase supply voltage 200 - 240 V units</b> |            |           |             |          |             |
| ACS150-01U-02A4-2                               | R0         | 10        | gG          | 10       | UL class T  |
| ACS150-01U-04A7-2                               | R1         | 16        | gG          | 20       | UL class T  |
| ACS150-01U-06A7-2                               | R1         | 20        | gG          | 25       | UL class T  |
| ACS150-01U-07A5-2                               | R2         | 25        | gG          | 30       | UL class T  |
| ACS150-01U-09A8-2                               | R2         | 35        | gG          | 35       | UL class T  |
| <b>3-phase supply voltage 200 - 240 V units</b> |            |           |             |          |             |
| ACS150-03U-02A4-2                               | R0         | 10        | gG          | 10       | UL class T  |
| ACS150-03U-03A5-2                               | R0         | 10        | gG          | 10       | UL class T  |
| ACS150-03U-04A7-2                               | R1         | 10        | gG          | 15       | UL class T  |
| ACS150-03U-06A7-2                               | R1         | 16        | gG          | 15       | UL class T  |
| ACS150-03U-07A5-2                               | R1         | 16        | gG          | 15       | UL class T  |
| ACS150-03U-09A8-2                               | R2         | 16        | gG          | 20       | UL class T  |
| <b>3-phase supply voltage 380 - 480 V units</b> |            |           |             |          |             |
| ACS150-03U-01A2-4                               | R0         | 10        | gG          | 10       | UL class T  |
| ACS150-03U-01A9-4                               | R0         | 10        | gG          | 10       | UL class T  |
| ACS150-03U-02A4-4                               | R1         | 10        | gG          | 10       | UL class T  |
| ACS150-03U-03A3-4                               | R1         | 10        | gG          | 10       | UL class T  |
| ACS150-03U-04A1-4                               | R1         | 16        | gG          | 15       | UL class T  |
| ACS150-03U-05A6-4                               | R1         | 16        | gG          | 15       | UL class T  |
| ACS150-03U-08A8-4                               | R1         | 20        | gG          | 25       | UL class T  |

\*) According to IEC-60269 standard.







# Control Connections



These connections are shown as examples only. Please refer to the *ACS150 User's Manual (3AFE68576032)* for more detailed information.

## ABB Standard macro

### Default I/O connections

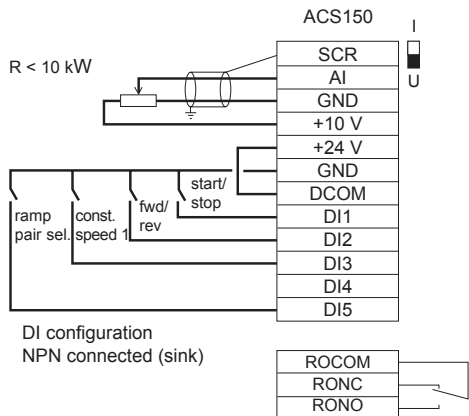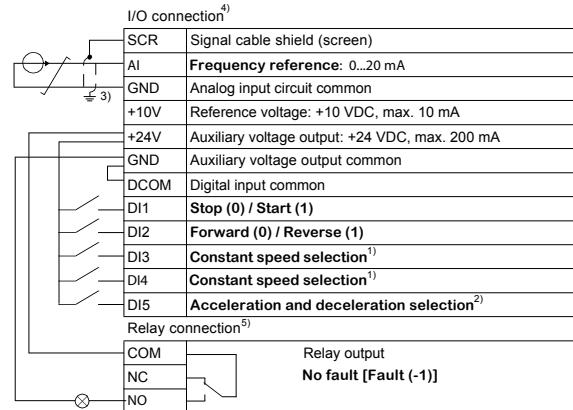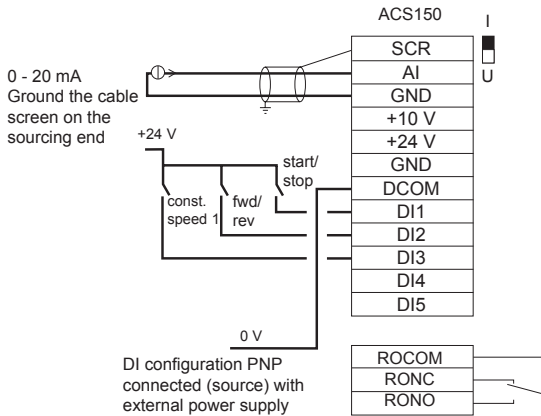

<sup>1)</sup> See parameter group 12 CONSTANT SPEEDS:

| DI3 | DI4 | Operation (parameter)                      |
|-----|-----|--|
| 0   | 0   | Set speed through integrated potentiometer |
| 1   | 0   | Speed 1 (1202)                             |
| 0   | 1   | Speed 2 (1203)                             |
| 1   | 1   | Speed 3 (1204)                             |

<sup>2)</sup> 0 = ramp times according to parameters 2202 and 2203.  
1 = ramp times according to parameters 2205 and 2206.

<sup>3)</sup> 360 degree grounding under a clamp.

<sup>4)</sup> Tightening torque = 0.22 Nm / 2 lbf. in.

<sup>5)</sup> Tightening torque = 0.5 Nm / 4.4 lbf. in.

## DIP switch analog inputs

AI : 0(4) - 20 mA

# Notes



# Notes





ABB Inc.  
Low Voltage Drives  
16250 W. Glendale Drive  
New Berlin, WI 53151  
Telephone (800) 752-0696  
Fax (262) 785-0397  
Internet <http://www.abb.us/drives>

ABB Inc.  
Drives & LVC Canada  
3299 J.B. Deschamps Blvd.  
Lachine, Quebec  
H8T 3E4  
Telephone (800) 215-3006  
Fax (514) 420-3137  
Internet <http://www.abb.com/motors&drives>  
<http://www.abb-drives.com>