



J1-J4 PINOUT



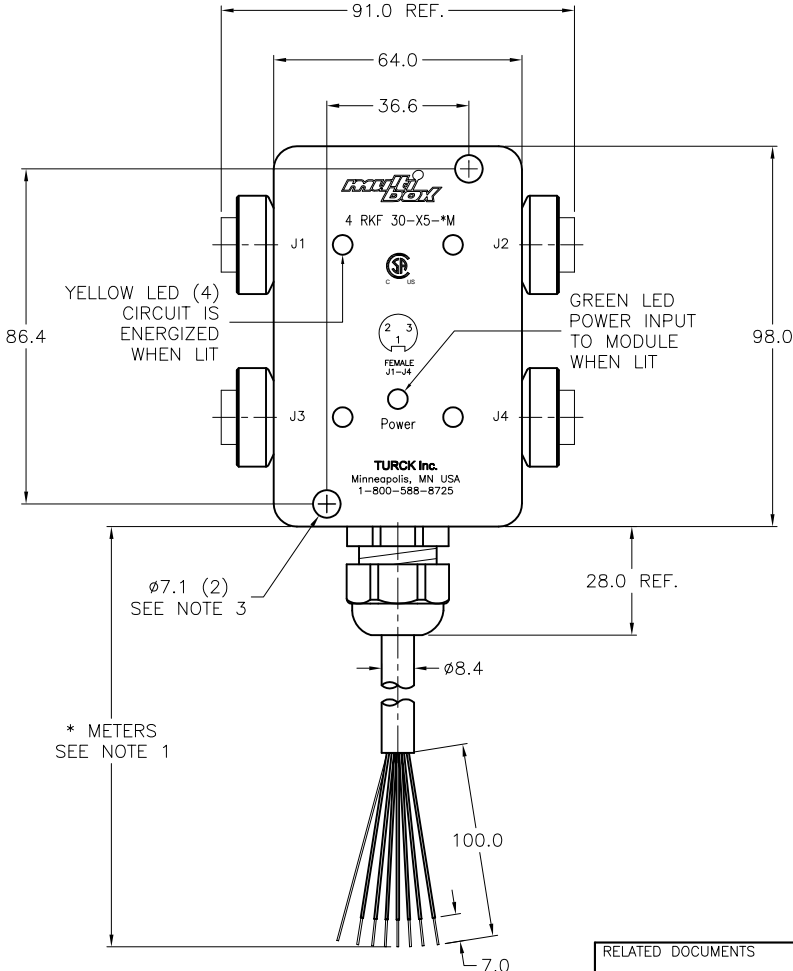

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. BOX HEIGHT IS 36.0mm NOMINAL.

3. CLEARANCE HOLE FOR 1/4-20 MOUNTING SCREWS (NOT INCLUDED).

4. AT 24 VAC, THE LED'S MAY NOT BE AS BRIGHT AS NORMAL.

E	UPDATE CABLE DIAMETER	RDS	03/28/12	37623
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS

1.

2.


3.

4.

MATERIAL

FINISH

3RD ANGLE PROJECTION



ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT

APVD

IK

SCALE 1=2.0

DATE 04/11/00

UNIT OF MEASUREMENT

MILLIMETERS

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
turck.com

TURCK INC

High Technology Sensors and Automation Controls

DESCRIPTION

4 RKF 30-X5-*M

IDENTIFICATION NO.


REV

FILE: 777000444

SHEET 1 OF 1

SPECIFICATIONS

CABLE JACKET/COLOR	PVC/BLACK
NUMBER OF CONDUCTORS [AWG]	7x18 AWG (SHIELD AND DRAIN)
HOUSING MATERIAL	ALUMINUM ALLOY
HOUSING FINISH/COLOR	EPOXY/BLACK
CONTACT CARRIERS	TPU
CONTACTS	GOLD-PLATED BRASS
DISCONNECTS	NICKEL-PLATED BRASS
OPERATING VOLTAGE	24 VAC-120 VAC
OPERATING CURRENT	4.0 A PER PORT, 9.0 A TOTAL
PROTECTION CLASS to DIN 40050	IP 67 ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to 80°C (-22°F to 176°F)

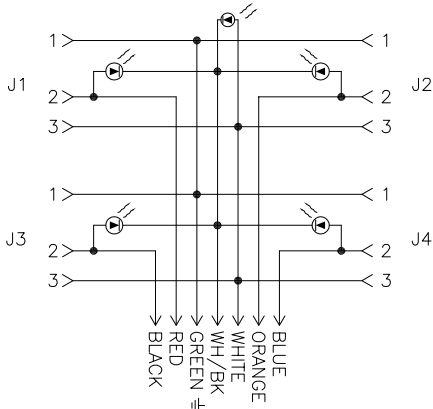

ELECTRICAL CIRCUIT DIAGRAM