



## Modular Tower Light

The Choice is Yours: You choose how to order and build the TL70 with the flexibility to customize the tower light as needed and change positions in the field.

- **Big and bright** 70 mm tower lights have two banks of LEDs
- **Rugged**, water-resistant **IP65** housing with UV stabilized material
- **Customize** lights for your application by selecting solid ON or flashing for each light segment
- Up to five colors plus audible in one device
- Bright, uniform indicator segments appear gray when off to **eliminate false indication** from ambient light





TL70 Modular  
Tower Light

# A Better Design by Banner

The TL70 tower light is Banner's latest achievement in rethinking and designing a better indicator.



Brighter lights—  
two banks of LEDs

Light segments can be  
configured solid ON or flashing

Match your machine  
with a choice of black  
or gray housing

IP65 housing for  
industrial use

Stack up to six modules, with five  
color choices (red, green, yellow, white  
and blue), plus one audible per device

Loud 92 dB adjustable  
alarm with four selectable  
tones—pulsed, chirp, siren  
or continuous




TL70 Modular Tower Light

# The Easiest Tower Light to Install

The TL70 tower light design is user friendly with just a few easy steps to complete installation.

### 1. Module Settings

- Assign module position (switches 1-6)
- Assign flash rate or audible tone (switches 7-8)

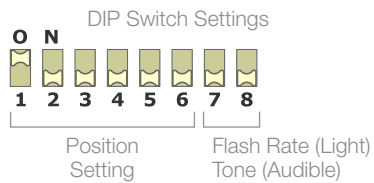

### 2. Assemble

- Align segment markings
- Press together
- Twist to lock

### 3. Apply Power

- M12 QD
- Flying lead cable
- Terminals






## TL70 Modular Tower Light




Supply Voltage	12 to 30 V dc
Construction	Bases, Covers and Light Segments: Polycarbonate
Environmental Rating	IP65
Operating Temperature	-40 to +50 °C (-40 to +122 °F)
Certifications	Approvals pending

## Order Preassembled

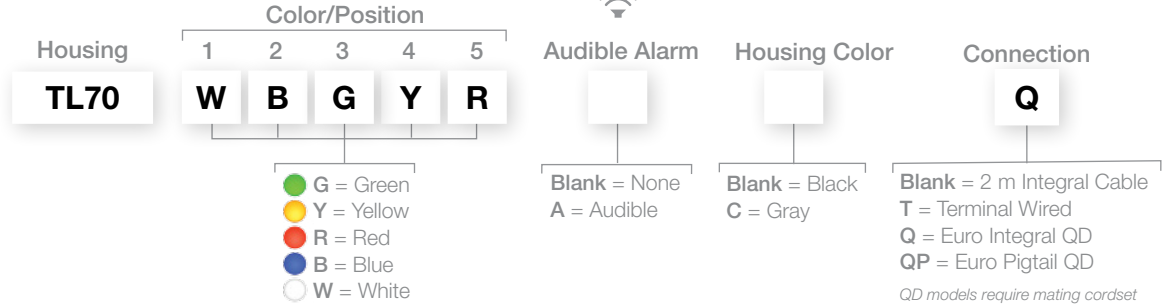

## Order Components to Build your Own

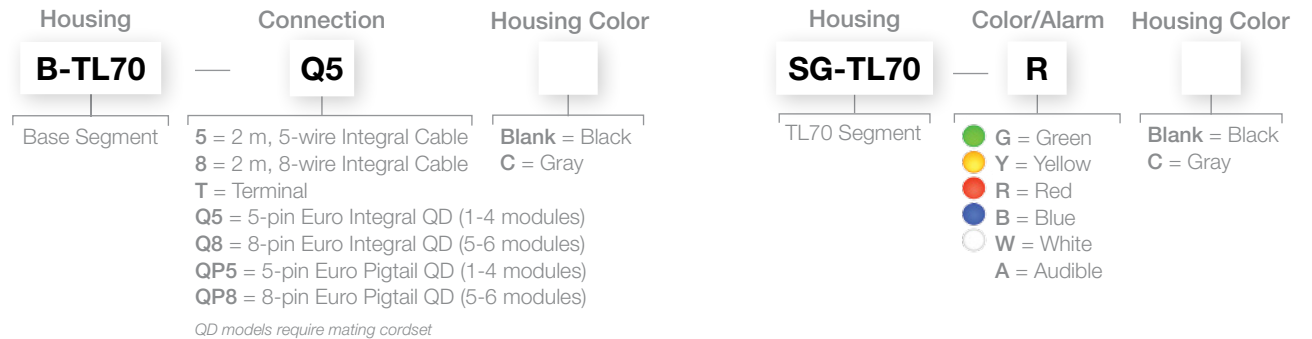

## Accessories



### Flush Mount Foldable Bracket

**SA-FFB12**  
Black Polycarbonate  
**SA-FFB12C**  
Gray Polycarbonate



### Elevated Mount System

**SA-M30**  
Black polycarbonate adapter/cover  
**SA-M30C**  
Gray polycarbonate adapter/cover

**SOP-E12-150A (150 mm)**  
**SOP-E12-300A (300 mm)**  
**SOP-E12-900A (900 mm)**  
Black anodized aluminum pipe

**SOP-E12-150AC (150 mm)**  
**SOP-E12-300AC (300 mm)**  
**SOP-E12-900AC (900 mm)**  
Clear anodized aluminum pipe

**SOP-E12-150SS (150 mm)**  
**SOP-E12-300SS (300 mm)**  
**SOP-E12-900SS (900 mm)**  
304 stainless steel pipe

### Cordsets

**5-Pin M12/ Euro-Style Cordsets\***  
Straight connector models listed

**8-Pin M12/ Euro-Style Cordsets\***  
Straight connector models listed.



**MQDC1-506**  
2 m (6.5')

**MQDC1-515**  
5 m (15')

**MQDC1-530**  
9 m (30')

**MQDC2S-806**  
2 m (6.5')

**MQDC2S-815**  
5 m (15')

**MQDC2S-830**  
9 m (30')

\* For right-angle models add RA to the end of model number (example, [MQDC1-506RA](#))

