

Dalton Gear Company

212 Colfax Ave. N.



Minneapolis, MN 55405 US

Phone: 612-374-2150 • Fax: 612-374-2467

E-Mail: daltongear@worldnet.att.net

Base Pad With Tension Slot

- The mounting slots have grooved edges that prevent movement when used with Dalton Lock Washers.
- The slotted mounting bolt holes will allow for a 1/4" deviation in mounting bolt distances.
- The Dalton tension slot provides for fine adjustment of the idler's position.
- The versatile base pad can be used with a secondary arm or spring adapter to form tensioners with more varied tensioning capacity.
- Tensioners are made of ductile iron to insure strength.
- Please call for discounts on list prices.

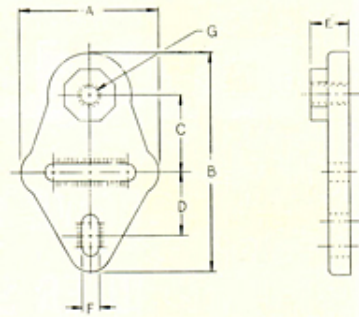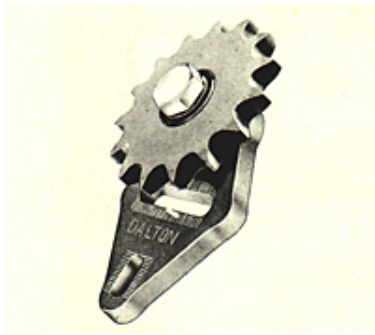

Results 1 - 7 of 7

Item #	A - Length	B - Height	C - Pitch	D - Pitch	E - Width	F - Length	List Price
1B-3	2 Inch	3-1/4 Inch	1-1/4 Inch	15/16 Inch	3/4 Inch	1/4 Inch	\$19.60
2B-4	3-1/2 Inch	5 Inch	1-5/8 Inch	1-7/8 Inch	15/16 Inch	3/8 Inch	\$25.20
2B-5	3-1/2 Inch	5 Inch	1-5/8 Inch	1-7/8 Inch	15/16 Inch	3/8 Inch	\$25.80
2B-6	3-1/2 Inch	5 Inch	1-5/8 Inch	1-7/8 Inch	15/16 Inch	3/8 Inch	\$29.00
D2B-4	3-1/2 Inch	5 Inch	1-5/8 Inch	1-7/8 Inch	15/16 Inch	3/8 Inch	\$26.80
D2B-5	3-1/2 Inch	5 Inch	1-5/8 Inch	1-7/8 Inch	15/16 Inch	3/8 Inch	\$27.20
D2B-6	3-1/2 Inch	5 Inch	1-5/8 Inch	1-7/8 Inch	15/16 Inch	3/8 Inch	\$31.00

Results 1 - 7 of 7