

E57P Performance



AccuProx



E56 Pancake



Nonmetallic Tubular



E52 Cube Style



E51, Factory Sealed



3.0	Quick Reference Guide	V8-T3-2
3.1	iProx Sensors Product Description	V8-T3-11
3.2	E57P Performance Series Sensors Product Description	V8-T3-18
3.3	E57PS Performance Short Body Sensors Product Description	V8-T3-24
3.4	E57G General Purpose Proximity Sensors Product Description	V8-T3-29
3.5	E57 Two-Wire (AC, AC/DC, DC) Proximity Sensors Product Description	V8-T3-35
3.6	AccuProx Analog Sensors Product Description	V8-T3-49
3.7	Ferrous Only Tubular Sensors Product Description	V8-T3-55
3.8	Metal Face Sensors Product Description	V8-T3-58
3.9	High Current Output Sensors Product Description	V8-T3-62
3.10	Small Diameter (4, 5, 6.5, 8 mm) Sensors Product Description	V8-T3-65
3.11	E56 Pancake Sensors Product Description	V8-T3-71
3.12	Nonmetallic Tubular Sensors Product Description	V8-T3-76
3.13	E52 Cube Style Sensors Product Description	V8-T3-79
3.14	E52 Rectangular Style Sensors Product Description	V8-T3-83
3.15	E55 Limit Switch Style Sensors with Nonmetallic Housings Product Description	V8-T3-86
3.16	E51 Modular Limit Switch Style Sensors Product Description	V8-T3-88
3.17	E51 Limit Switch Style, Factory Sealed 6P+ Sensors Product Description	V8-T3-97



Unless otherwise noted, the products contained in this section should not be used for functional safety applications. These products were not designed or tested to IEC 60947-5-3 or recommended for functional safety.

Learn Online

> For Customer Service in the U.S. call 1-877-ETN CARE (386-2273), in Canada call 1-800-268-3578. For Application Assistance in the U.S. and Canada call 1-800-426-9184.

Introduction

Quick Reference Guide

Inductive Proximity Sensors

ensing Application	Sensing Style	Size	Max Range	Product Family	Page
Shielded	Shielded tubular	4 mm	0.8 mm	Small Diameter Sensors	V8-T3-65
Sensor		5 mm	0.8 mm	Small Diameter Sensors	V8-T3-65
		6.5 mm	1 mm	Small Diameter Sensors	V8-T3-65
Target		8 mm	3 mm	Small Diameter Sensors	V8-T3-65
Mounting	g	12 mm	4 mm	iProx™ Sensors	V8-T3-11
~			4 mm	E57P Performance Sensors	V8-T3-18, V8-T3-24
			4 mm	E57G General Purpose Sensors	V8-T3-29
		18 mm	8 mm	iProx Sensors	V8-T3-11
			8 mm	E57P Performance Sensors	V8-T3-18, V8-T3-24
			8 mm	E57G General Purpose Sensors	V8-T3-29
		30 mm	15 mm	iProx Sensors	V8-T3-11
			15 mm	E57P Performance Sensors	V8-T3-18, V8-T3-24
			15 mm	E57G General Purpose Sensors	V8-T3-29
Unshielded	Unshielded tubular	6.5 mm	2 mm	Small Diameter	V8-T3-65
Sensor		8 mm	6 mm	Small Diameter	V8-T3-65
		12mm	10 mm	iProx Sensors	V8-T3-11
			8 mm	E57P Performance Sensors	V8-T3-18, V8-T3-24
Target Mour	iting		8 mm	E57G General Purpose Sensors	V8-T3-29
~		18 mm	18 mm	iProx Sensors	V8-T3-11
			12 mm	E57P Performance Sensors	V8-T3-18, V8-T3-24
			12 mm	E57G General Purpose Sensors	V8-T3-29
		30 mm	29 mm	iProx Sensors	V8-T3-11
			22 mm	E57P Performance Sensors	V8-T3-18, V8-T3-24
			22 mm	E57G General Purpose Sensors	V8-T3-29
	Analog tubular	12 mm	8 mm	AccuProx [™] Analog Sensors	V8-T3-49
		18 mm	15 mm	AccuProx Analog Sensors	V8-T3-49
Analog Sensor		30 mm	25 mm	AccuProx Analog Sensors	V8-T3-49
Shielded Sensor	Shielded cube	40 x 40 x 40 mm	20 mm	E52 Cube Style Sensors	V8-T3-79
Target Mounting					
Unshielded Sensor	Unshielded cube	40 x 40 x 40 mm	40 mm	E52 Cube Style Sensors	V8-T3-79
Target					

Introduction

ensing Application	Sensing Style	Size	Max Range	Product Family	Page
Nounting Shielded Sensor	Shielded limit switch	118 x 40 x 40 mm 114 x 39 x 38.4 mm	13 mm	E51 Modular Limit Switch Style Sensors E51 Limit Switch Style, Factory Sealed 6P+ Sensors E55 Limit Switch Style Sensors with Nonmetallic Housings	V8-T3-88, V8-T3-97
lounting	Unshielded limit switch	118 x 40 x 40 mm 114 x 39 x 38.4 mm	24 mm	E51 Series E55 Series	V8-T3-88, V8-T3-97
Jnshielded Sensor	Shielded pancake	79 x 79 x 39 mm	40 mm	E56 Series	V8-T3-71
Mounting Unshielded Sensor Mounting	Unshielded pancake	79 x 79 x 39 mm 110 x 110 x 41 mm 171.5 x 171.5 x 67.5 mm	100 mm	E56 Series	V8-T3-71

Inductive Proximity Sensors, continued

Introduction

Technical Reference

Inductive Proximity Sensors




General

There are a number of factors which should be considered when applying induction proximity sensors. A detailed discussion of these factors can be found on **Page V8-T12-4**. Presented below are a few of the more important considerations for quick reference.

Mounting

Inductive proximity sensors are available in two classifications: shielded (also known as embeddable or flush mountable) and unshielded (non-embeddable or non-flush mountable). What these terms refer to is the distance to surrounding metal that the device can be mounted. In the case of a shielded sensor the device can be mounted with the sensor completely surrounded by metal. In the case of an unshielded sensor, a metal free zone must be provided when mounting the sensor. The size of the metal free zone is dependent on both the size of the sensor and the type of sensing range it has, for example, standard or extended.

Mounting Ranges



Standard Range							
Shielded	0	0					
Unshielded	2 x Sn	Cap height					
Extended Rang	je						
Semi-shielded	Sn	d					
Non-embeddable	2 x Sn	Cap height					

Where **a** and **b** are the metal free dimensions.

When mounting the sensors, do not exceed the following recommended torque specifications.

Torque Specifications

Stainless Steel	Nickel-Plated Brass
12 mm Diamet	er
35 lb-in (4.0 Nm)	20 lb-in (2.3 Nm)
18 mm Diamet	er
70 lb-in (7.9 Nm)	70 lb-in (7.9 Nm)
30 mm Diamet	er
70 lb-in (7.9 Nm)	70 lb-in (7.9 Nm)

3

Extended Range Sensors

Extended range proximity sensors by Eaton's Electrical Sector offer sensing distances almost three times greater than conventional devices. They are available in semi-shielded designs: mounted similar to an embeddable sensor—and non-embeddable designs requiring more metal free zone area than conventional unshielded sensors. All are available in a variety of circuits and terminations.

Target Material

When manufacturers of inductive proximity sensors state the sensing range of their devices, they are usually based upon a ferrous target made of carbon-rolled steel (IE FE 360) defined by ISO630. For example, in this product guide the E57P-18SPN5-C2 has a sensing range of 5 mm based upon a target of mild steel. Sensing ranges to targets made of non-ferrous metals have to have a correction factor applied as listed in the table below. To use this table, multiply the sensing distance of the device by the factor given. Example: The E57P-18SPN5-C2 has a sensing range of 5 mm. When used to sense a brass target, the sensing range becomes 2.25 mm (5 mm x 0.45).

Inductive Proximity Sensors

Table of Correction Factors

Multiply sensing range of device by factor given below.

Correction Factors

	Sensor Size									
Target	4–8 mm	12 mm	18 mm	30 mm	Limit Switch					
Stainless steel 400	0.90	0.90	1.0	1.0	1.0					
Stainless steel 300	0.65	0.70	0.70	0.75	0.85					
Brass	0.35	0.45	0.45	0.45	0.5					
Aluminum	0.35	0.40	0.45	0.40	0.47					
Copper	0.30	0.25	0.35	0.30	0.40					

Target Size

Often overlooked when applying sensors is the fact that the manufacturer's stated sensing ranges are also dependent upon target size. The table below reflects the standard target sizes which were used to determine sensing ranges. If targets are the same size or greater than standard, no reduction in sensing distance will occur. However, a smaller target size will result in a decrease in sensing range. A general rule of thumb is that the target size shall be three times the range or the size of the sensor face, whichever is larger.

Standard Target Size 0

	Standard Sensing Rai	nge	Extended Sensing Range	1
Target	Shielded Devices	Unshielded Devices	Semi-Shield Devices	Non-Embeddable Devices
4 mm	4 mm square	4 mm square	—	—
5 mm	5 mm square	5 mm square	—	_
6.5 mm	6.5 mm square	6.5 mm square	—	_
8 mm	8 mm square	8 mm square	—	_
12 mm	12 mm square	12 mm square	18 mm square	30 mm square
18 mm	18 mm square	24 mm square	36 mm square	60 mm square
30 mm	30 mm square	45 mm square	66 mm square	_
Limit switch	45 mm square	72 mm square	_	_

Note

^① Targets are 1 mm thick.

E57P Performance Series

Introduction

Product Selection Guide

iProx

3

Page V8-T3-11

Overview

Designed to be the highest performing tubular inductive sensor. Standard features include extended sensing ranges, high noise-immunity, extreme durability and includes Autoconfigure Technology. Advanced features include output delay. speed detection and cloning with ProxView Software.

Applications

Automotive, machine tool, material handling where high sensing performance and inventory consolidation is a priority.

Product Features

detects a sinking (NPN) or sourcing (PNP) connection and switches the sensor accordingly, without any user intervention Optional computer programming cable and Windows-based ProxView configuration software makes it easy to customize sensors

Clone the sensor to match the characteristics of more than 4,800 competitive models, or configure it to match your specific application needs

Advanced programmable features such as dual outputs, output delay, speed detection and more

Technical Data and Specifications

Current ratings-AC: 250 mA DC: 300 mA Enclosure ratings-NEMA® 4, 4X, 6, 6P, 12, 13 IEC IP67, IP69K Construction-Stainless steel

Approvals

cUL[®] Listed



V8-T3-6



Page V8-T3-18

Overview

High performance inductive sensors. Extended and standard ranges available.



E57PS Performance

Short Body

Page V8-T3-24

Overview

High performance inductive sensors with the ability to fit into tighter spaces

E57G General Purpose



Page V8-T3-29

Overview

This full-line, tubular proximity sensor family provides a cost-effective solution for high volume OEM use.

Applications

Automotive, machine tool, material handling where high sensing performance and inventory consolidation is a priority.

Product Features

12, 18 and 30 mm diameters Three-wire DC sensors 360° LED indicators standard NO or NC outputs Short-circuit protection Resettable short-circuit protected and reverse polarity on select models Robust stainless steel tubes, shockresistant front caps, polycarbonate end bells, and impact-absorbing potting compound are resistant to physical and environmental abuse in high temperature, high pressure washdown and high shock and vibration applications

Technical Data and Specifications

Current ratings-DC: 300 mA Enclosure ratings-IP67, IP69K; NEMA 4, 4X, 6, 6P Construction-Stainless steel housing and nuts

Approvals

cULus Listed

CE

CE

Applications

Automotive, machine tool, material handling where high sensing performance and inventory consolidation is a priority.

Product Features

12, 18 and 30 mm diameters Three-wire DC sensors 360° LED indicators standard NO or NC outputs Short-circuit protection Resettable short-circuit protected and reverse polarity on select models Robust stainless steel tubes, shockresistant front caps, polycarbonate end bells, and impact-absorbing potting compound are resistant to physical and environmental abuse in high temperature, high pressure washdown and high shock and vibration applications

Technical Data and Specifications

Current ratings-DC: 300 mA Enclosure ratings-IP67, IP69K; NEMA 4, 4X, 6, 6P Construction-Stainless steel housing and nuts



Applications

Machine tool detection, press applications, cam detection, material handling, valve and shaft position, automotive assembly.

Product Features

12, 18 and 30 mm diameters Three-wire DC sensors 360° LED indicators standard NO or NC outputs Short-circuit protection Resettable short-circuit protected and reverse polarity on select models Robust stainless steel tubes, shockresistant front caps, polycarbonate end bells, and impact-absorbing potting compound are resistant to physical and environmental abuse in high temperature, high pressure washdown and high shock and vibration applications

Technical Data and Specifications

Current ratings-DC: 100 mA Enclosure ratings-IP67; NEMA 4, 4X, 6, 6P Construction-Stainless steel housing and nickel-brass nuts

Approvals

CE cULus Listed



__C(UL

Auto-configure technology automatically

CE cULus Listed



Approvals

Introduction

E57 Two-Wire (AC, AC/DC, DC) Proximity



Page V8-T3-35

Overview

Various models available in two-wire configurations: Stainless steel (AC, AC/DC) Stainless steel short body (AC, AC/DC) Nickel-brass (AC, DC)

Applications

Machine tool detection, press applications, cam detection, material handling, valve and shaft position, automotive assembly.

Product Features

12, 18 and 30 mm diameters Two-wire AC, AC/DC, DC Shielded and unshielded models Standard and extended ranges LED indicators Cable and micro-connector NO or NC outputs

Technical Data and Specifications

Stainless steel: Current ratings— 500 mA maximum Enclosure ratings—IP67, IP69K; NEMA 4, 4X, 6, 6P, 12, 13

Nickel-Brass: Current ratings— 200 mA (AC); 100 mA (DC) Enclosure ratings— IP69K, IP67

Approvals

cULus (Stainless Steel) cCSAus (Nickel-Brass) CE (SS: AC/DC only, NiBr: DC only)



AccuProx



Page V8-T3-49

Overview

Applications

Product Features

AccuProx sensors feature analog outputs that change linearly as the target moves closer or further from the sensor face.

Part positioning, distance, size and

and error proofing (such as material imperfection or blemish detection), eccentricity or absolute angle detection, identification of different metals

Extended linear sensing range of up to

tubular analog inductive sensors

Outputs available in current

performance

Current ratings-

Construction-

Stainless steel

Approvals

cUL Listed

0-10 Vdc, 0-20 mA, 4-20 mA

25 mm-three times longer than standard

(4-20 or 0-20 mA) and voltage (0-10 V)

High output resolution and repeatability

Robust stainless steel barrel, shockresistant front cap, polycarbonate end bell and impact-absorbing potting compound Ideal for extreme temperature or high pressure washdown environments

for applications requiring precision sensing

Technical Data and Specifications

thickness measurement, general inspection



Ferrous Only Tubular

Page V8-T3-55

Overview

Sensors designed to detect only ferrous metals (steel/iron).

Applications

Workcell applications, automotive and aircraft production.

Product Features

18 mm diameters Two-wire AC or three-wire DC NO or NC outputs Micro- and mini-pin terminations LED indicators

Technical Data and Specifications

Current ratings— AC: 500 mA continuous DC: 200 mA continuous Enclosure ratings— NEMA 4, 4X, 6, 6P, 12, 13 IEC IP67 Construction— Stainless steel

Approvals

UL Listed CSA Certified



Metal Face



Page V8-T3-58

Overview

Tough sensors with thick stainless steel sensing faces and barrels.

Applications

Metal cutting operations where damage to sensor face could occur.

Product Features

12, 18 and 30 mm diameters Two-wire AC or three-wire DC 20 mil thick stainless steel face 303 stainless steel barrel LED indicator 2-meter cable, micro- and mini-pin connections

Technical Data and Specifications

Current ratings— AC: 500 mA continuous DC: 200 mA continuous Enclosure ratings— NEMA 4, 4X, 6, 6P, 12, 13 IEC IP67 Construction— Stainless steel

Approvals

UL Listed CSA Certified



Introduction

High Current Output



Page V8-T3-62

Overview

DC sensors which can carry extremely large continuous inrush current.

Applications

Heavy-duty vehicles, cement mixers, lift trucks, front end loaders, farm equipment.



Ferrous Only Tubular

Page V8-T3-55

Overview

Applications

aircraft production

Product Features

Two-wire AC or three-wire DC

Micro- and mini-pin terminations

18 mm diameters

NO or NC outputs

LED indicators

Sensors designed to detect only ferrous metals (steel/iron).

Workcell applications, automotive and



Page V8-T3-65

Small Diameter

Overview

Small diameter and short body (4, 5, 6.5 and 8 mm) tubular housings for tight sensing applications.

Applications

Automation equipment, robotics, machine tool, counting, sorting

Product Features

Variety of diameters in stainless steel PVC cable, micro- and nano-pin connections LED indicators standard Short overall lengths Short circuit and reverse polarity protection

E56 Pancake



Page V8-T3-71

Overview

Self-contained sensors capable of sensing up to 3.94 inches (100 mm).

Applications

Oil rig operations, floor conveyors, automotive assembly, overhead cranes

Product Features

40, 50, 70 and 100 mm sensing distances Four-wire DC models have complementary outputs (1 NO/1 NC) Four-wire DC models use auto-configure technology, which allows the sensor to automatically adapt for NPN or PNP without user intervention Available in two-wire AC versions

Power and output LED indicator Quick disconnect option Short-circuit protected in DC

Longest sensing distances available

Technical Data and Specifications

Current ratings-AC: 500 mA continuous DC: 200 mA continuous Enclosure ratings-NEMA 4, 4X, 12, 13 (some models also rated NEMA 6) IEC IP66 Construction-PPS

Approvals

cULus Listed



30 mm diameter stainless steel housing

Technical Data and Specifications

Current ratings-

Varies by model

Construction-

Stainless steel

Approvals

IEC IP67

Enclosure ratings-

NEMA 4, 4X, 6, 6P, 12, 13

Product Features

-40° to 158°F (-40° to 70°C) temperature range NO and NC isolated outputs Heavy gauge SJO cable

Current ratings-AC: 500 mA continuous DC: 200 mA continuous Enclosure ratings-NEMA 4, 4X, 6, 6P, 12, 13 IFC IP67 Construction-Stainless steel

Approvals

UL Listed CSA Certified



CE

3

Technical Data and Specifications

Current ratings-DC: 200 mA maximum Enclosure ratings-NEMA 4, 4X, 6, 6P, 12, 13 IEC IP67

Stainless steel

Technical Data and Specifications Construction-

Approvals

CE

housings

Volume 8-Sensing Solutions CA08100010E-July 2015 www.eaton.com

V8-T3-9

Introduction

Tubular, Nonmetallic Housing

E52 Cube Style



E52 Rectangular Style

Inductive Proximity Sensors



Page V8-T3-76

Overview

Tubular sensors with nonmetallic housings offer high corrosion resistance.

Applications

Food processing lines, high washdown environments

Product Features

12, 18 and 30 mm diameters shielded and unshielded sensing Normally open or closed outputs AC and DC voltages Tough ABS plastic housing Output LED on all models

Technical Data and Specifications

Current ratings-AC: 150 mA DC: 200 mA Enclosure ratings-NEMA 3, 3S, 4, 4X, 13 IFC IP66 Construction-ABS plastic

Approvals



Page V8-T3-79

Overview

A family of industry-standard, cube-sized inductive sensors with long range capabilities.

Applications

Automotive, manufacturing, machinery OEMs

Product Features

Long inductive proximity ranges available (up to 40 mm sensing distance) Four-wire DC models have complementary outputs (1 NO/1 NC) Four-wire DC models use auto-configure technology, which allows the sensor to automatically adapt for NPN or PNP without user intervention Robust design featuring vibration and impact-absorbing potting compound Ideal for extreme temperatures or high pressure washdown environments

Technical Data and Specifications

Current ratings-DC: 300 mA maximum Enclosure ratings-NEMA 4, 4X, 6, 6P, 12, 13 IEC IP67 Construction-Zinc alloy/PPS, PL

Technical Data and Specifications

Current ratings-DC: 100 mA maximum Enclosure ratings-NEMA 1, 2, 3, 3S, 4, 12 IEC IP66 Construction-PBT composition housing

Approvals



Approvals

cULus Listed



Page V8-T3-83

Overview

A variety of small rectangular sensors for limited space applications.

Applications

Tight applications where conventional sensor are too large

Product Features

Variety of housing styles R12, R18, Q16, Q25 10 to 30 Vdc NPN and PNP output Short-circuit protection LED indicator for output status



3.0

Inductive Proximity Sensors

E51 Limit Switch Style,

Factory Sealed 6P +

Introduction

E55 Limit Switch Style, Nonmetallic Housing



Page V8-T3-86

Overview

These nonmetallic sensors provide corrosion resistance in a limit switch style housing.

Applications

Food processing lines, high washdown environments

Product Features

5 position head can be top mounted or in any of four side positions Long sensing ranges up to 40 mm Normally open or closed outputs AC voltages Tough PBT resin housing

Technical Data and Specifications

Current ratings— AC: 400 mA Enclosure ratings— NEMA 4, 4X, 6, 12, 13 IEC IP67 Construction— PBT resin

Approvals

_



Page V8-T3-88

Overview

Completely epoxy filled in unitized, one piece limit switch style construction for reliable performance under the most adverse of environmental conditions.

Applications

All corrosive environments: Coolants/ cutting oils, automotive applications

Product Features

One piece housing on switch body/ receptacle Head and housing totally epoxy encapsulated Side sensing head can be unfastened and moved to any of four positions Quick disconnect options Corrosive resistant epoxy coated housing

Technical Data and Specifications

Current ratings— AC: 1 ampere continuous DC: 0.6 ampere continuous Enclosure ratings— NEMA 3, 3S, 4, 4X, 6, 6P, 12, 13 IEC IP67 Construction— Die cast zinc Gasket material: Viton[®]

Approvals

cUL Listed



E51 Limit Switch Style, Modular



Page V8-T3-97

Overview

Modular design allows maximum use of inventories in these limit switch style housings. Solid-state circuitry in a variety of sensing ranges.

Applications

Machine tool, punch presses, automotive, conveyor systems

Product Features

Modular heads, switch bodies, receptacles Shielded or unshielded sensing ranges Solid-state electronics Viton gasket seals LED indicators for power and output status Top and side sensing heads Alternate frequency for side by side operation Components individually labeled for easy identification

Technical Data and Specifications

Current ratings— AC: 1 ampere continuous DC: 0.6 ampere continuous Enclosure ratings— NEMA 3, 3S, 4, 4X, 6, 6P, 12, 13 IEC IP67 Class I, Class II, Division 2 Groups A, B, C, D, F and G; Class III Construction— Die cast zinc Gasket material: Viton

Approvals

UL Listed CSA Certified (most models)



iProx Sensors

iProx Sensors



Contents

Description	Page	
iProx Sensors		
Product Selection		
iProx Sensors	V8-T3-12	
Complementary and Dual Output Sensors .	V8-T3-14	
Compatible Connector Cables	V8-T3-15	
Accessories	V8-T3-15	
Technical Data and Specifications	V8-T3-16	
Wiring Diagrams	V8-T3-17	
Dimensions	V8-T3-17	

iProx Sensors

Product Description

The iProx represents the highest performance, most versatile tubular inductive sensor offered by Eaton's Electrical Sector. By utilizing an embedded microprocessor and exclusive SmartSense™ technology, iProx can sense up to three times farther than typical sensors of its class, while providing an unheard-of level of customization.

Both shielded and unshielded versions of iProx feature extended sensing ranges. This allows the sensor to be mounted farther from the target, thereby reducing the potential for target impacts and increasing the sensing reliability of your application.

The iProx also includes a wide range of advanced features that can be enabled via optional programming tools. Using the ProxView Windows-based software package, an entirely custom sensor can be programmed to perfectly fit an application.

For the most current information on this product, visit our Web site: www.eaton.com Sensor characteristics, such as sensing range, can be customized down to the nearest tenth of a millimeter. Outputs can be changed from NO to NC. The iProx even features built-in timing delays and speed detection logic no PLC programming is necessary.

With extended sensing range, quality construction and the ability to adapt to its environment, iProx is the ideal choice for even the most demanding inductive sensing applications.

Application Description Typical Applications

- Automotive
- Machine tool
- Material handling
- Metalworking

Features

- Available in AC two-wire, DC three-wire and unique DC four-wire with complementary (NO-NC) or dual NO outputs
- Reliably detect metal targets at up to three times the range of conventional shielded or unshielded tubular inductive sensors

- Quality construction using a stainless steel barrel, 360-degree dual-color LED indicator, Ryton[®] impact-resistant face cap and vibration-absorbing potting compound
- Auto-configure technology automatically detects a sinking (NPN) or sourcing (PNP) connection and switches the sensor accordingly, without any user intervention
- Exclusive SmartSense embedded microprocessor technology allows for customizable range, band sensing, nuisance metal rejection, timing delays and over/under speed detection
- Optional computer programming cable and Windows-based ProxView configuration software makes it easy to customize sensors
- Withstands high electrical noise (up to 20 V/m)
- Resistant to extreme temperatures (-40 °F [-40 °C])

Standards and Certifications

- cUL Listed
- CE



DANGER

THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

For Customer Service in the U.S. call 1-877-ETN CARE (386-2273), in Canada call 1-800-268-3578. For Application Assistance in the U.S. and Canada call 1-800-426-9184. iProx Sensors

Product Selection

iProx Sensors

Note: Custom iProx models can also be ordered directly from the factory with pre-set ranges, outputs and connectors. Consult the Eaton Application Engineers at 1-800-426-9184 for more information.

Т	wo-Wire	Sensors				
)perating /oltage	Sensing Range	Shielding	Connection Type $^{}$	NO Output Catalog Number $^{\textcircled{2}}$	NC Output Catalog Number [@]
1	2 mm Diar	neter				
2	0–132 Vac	4 mm	Shielded	3-pin micro AC connector	E59-M12A105A01-A1 🔕	E59-M12A105A01-A2 🕃
				3-pin micro AC pigtail ③	E59-M12A105A01P-A1 🔕	E59-M12A105A01P-A2 🕃
				3-pin mini AC pigtail ³	E59-M12A105A01PB-A1 🕢	E59-M12A105A01PB-A2 🕃
				2-meter cable	E59-M12A105C02-A1	E59-M12A105C02-A2
		10 mm	Unshielded	3-pin micro AC connector	E59-M12C110A01-A1 🕑	E59-M12C110A01-A2 🕢
£				3-pin micro AC pigtail ③	E59-M12C110A01P-A1 🜛	E59-M12C110A01P-A2 🕢
				3-pin mini AC pigtail ③	E59-M12C110A01PB-A1 🐱	E59-M12C110A01PB-A2 🕃
				2-meter cable	E59-M12C110C02-A1	E59-M12C110C02-A2
1	8 mm Diar	neter				
2	0–132 Vac	8 mm	Shielded	3-pin micro AC connector	E59-M18A109A01-A1 🐱	E59-M18A109A01-A2 🔕
				3-pin micro AC pigtail ③	E59-M18A109A01P-A1 🔕	E59-M18A109A01P-A2 🕢
				3-pin mini AC pigtail ³	E59-M18A109A01PB-A1 🕢	E59-M18A109A01PB-A2 🕃
				2-meter cable	E59-M18A109C02-A1	E59-M18A109C02-A2
		18 mm	Unshielded	3-pin micro AC connector	E59-M18C118A01-A1 🕢	E59-M18C118A01-A2 🕢
1				3-pin micro AC pigtail ③	E59-M18C118A01P-A1 🜛	E59-M18C118A01P-A2 🕑
				3-pin mini AC pigtail ³	E59-M18C118A01PB-A1 🐼	E59-M18C118A01PB-A2 🕃
				2-meter cable	E59-M18C118C02-A1	E59-M18C118C02-A2
3	80 mm Diar	neter				
2	0–132 Vac	15 mm	Shielded	3-pin micro AC connector	E59-M30A115A01-A1 🐱	E59-M30A115A01-A2 🕢
				3-pin micro AC pigtail ③	E59-M30A115A01P-A1 😺	E59-M30A115A01P-A2 🔅
				3-pin mini AC pigtail ③	E59-M30A115A01PB-A1 🕢	E59-M30A115A01PB-A2 🔅
				2-meter cable	E59-M30A115C02-A1	E59-M30A115C02-A2
		29 mm	Unshielded	3-pin micro AC connector	E59-M30C129A01-A1 👀	E59-M30C129A01-A2 🕢
				3-pin micro AC pigtail ③	E59-M30C129A01P-A1 🔕	E59-M30C129A01P-A2 👀
r				3-pin mini AC pigtail ③	E59-M30C129A01PB-A1 🔕	E59-M30C129A01PB-A2 🕃
				2-meter cable	E59-M30C129C02-A1	E59-M30C129C02-A2

Notes

• See listing of compatible connector cables on Page V8-T3-15.

^① For sensors with custom cable lengths or PUR jackets, contact Application Engineering at 1-800-426-9184.

² Sensors are ordered with pre-set outputs from the factory, but can be later programmed either NO or NC using the ProxView software.

^③ Standard pigtail cable length is 12 in.

Note: Custom iProx models can also be ordered directly from the factory with pre-set ranges, outputs and connectors. Consult the Eaton Application Engineers at 1-800-426-9184 for more information.

Three-W	ire Sensors	5			
Operating Voltage	Sensing Range	Shielding	Connection Type $^{(1)}$	NO Output Catalog Number $^{\textcircled{2}}$	NC Output Catalog Number $^{(2)}$
12 mm Dia	meter				
6-48 Vdc	4 mm	Shielded	4-pin micro DC connector	E59-M12A105D01-D1 🌐	E59-M12A105D01-D2 🕃
			4-pin micro DC pigtail ③	E59-M12A105D01P-D1 🕃	E59-M12A105D01P-D2 🤃
			2-meter cable	E59-M12A105C02-D1	E59-M12A105C02-D2
	10 mm	Unshielded	4-pin micro DC connector	E59-M12C110D01-D1 🕃	E59-M12C110D01-D2 🏵
			4-pin micro DC pigtail ③	E59-M12C110D01P-D1 🔅	E59-M12C110D01P-D2 🕃
			2-meter cable	E59-M12C110C02-D1	E59-M12C110C02-D2
18 mm Dia	meter				
6–48 Vdc	8 mm	Shielded	4-pin micro DC connector	E59-M18A108D01-D1 🏵	E59-M18A108D01-D2 🕃
*			4-pin micro DC pigtail ^③	E59-M18A108D01P-D1 🕃	E59-M18A108D01P-D2
			2-meter cable	E59-M18A108C02-D1	E59-M18A108C02-D2
	18 mm	Unshielded	4-pin micro DC connector	E59-M18C116D01-D1 🔅	E59-M18C116D01-D2 🕃
2			4-pin micro DC pigtail ③	E59-M18C116D01P-D1 🔃	E59-M18C116D01P-D2
			2-meter cable	E59-M18C116C02-D1	E59-M18C116C02-D2
30 mm Dia	meter				
6-48 Vdc	15 mm	Shielded	4-pin micro DC connector	E59-M30A115D01-D1 🏵	E59-M30A115D01-D2 🕃
F			4-pin micro DC pigtail ^③	E59-M30A115D01P-D1 🔃	E59-M30A115D01P-D2
			2-meter cable	E59-M30A115C02-D1	E59-M30A115C02-D2
	29 mm	Unshielded	4-pin micro DC connector	E59-M30C129D01-D1 🏽	E59-M30C129D01-D2 🕄
			4-pin micro DC pigtail ③	E59-M30C129D01P-D1 🔅	E59-M30C129D01P-D2

Notes

(B) See listing of compatible connector cables on Page V8-T3-15.

^① For sensors with custom cable lengths or PUR jackets, contact Application Engineering at 1-800-426-9184.

^② Sensors are ordered with pre-set outputs from the factory, but can be later programmed either NO or NC using the ProxView software.

③ Standard pigtail cable length is 12 in.

iProx Sensors

Complementary and Dual Output Sensors

Four-Wire Sensors

	I Oul-Wil	e Sensu	13				
	Operating Voltage	Sensing Range	Shielding	Output Type	Connection Type	Complementary Output (1NO-1NC) Catalog Number	Dual NO Output Catalog Number 🛈
Standard Range	12 mm Di	ameter					
	6-48 Vdc	4 mm	Shielded	NPN (sinking)	4-pin micro DC connector	E59-M12A105D01-D3NN 🖲	E59-M12A105D01-D1NN 🙂
13					2-meter cable	E59-M12A105C02-D3NN	E59-M12A105C02-D1NN
				PNP (sourcing)	4-pin micro DC connector	E59-M12A105D01-D3PP 🏽	E59-M12A105D01-D1PP 🙂
xtended Range					2-meter cable	E59-M12A105C02-D3PP	E59-M12A105C02-D1PP
200		10 mm	Unshielded	NPN (sinking)	4-pin micro DC connector	E59-M12C110D01-D3NN 🔅	E59-M12C110D01-D1NN 🕃
A A					2-meter cable	E59-M12C110C02-D3NN	E59-M12C110C02-D1NN
224				PNP (sourcing)	4-pin micro DC connector	E59-M12C110D01-D3PP 🙁	E59-M12C110D01-D1PP 🏽
					2-meter cable	E59-M12C110C02-D3PP	E59-M12C110C02-D1PP
tandard Range	18 mm Di	ameter					
and a	6-48 Vdc	8 mm	Shielded	NPN (sinking)	4-pin micro DC connector	E59-M18A108D01-D3NN 🏽	E59-M18A108D01-D1NN 🔅
ar					2-meter cable	E59-M18A108C02-D3NN	E59-M18A108C02-D1NN
520				PNP (sourcing)	4-pin micro DC connector	E59-M18A108D01-D3PP 🙂	E59-M18A108D01-D1PP 🙂
xtended Range					2-meter cable	E59-M18A108C02-D3PP	E59-M18A108C02-D1PP
		18 mm	Unshielded	NPN (sinking)	4-pin micro DC connector	E59-M18C116D01-D3NN 🏽	E59-M18C116D01-D1NN 🕃
CI-P-					2-meter cable	E59-M18C116C02-D3NN	E59-M18C116C02-D1NN
Ly/				PNP (sourcing)	4-pin micro DC connector	E59-M18C116D01-D3PP 🙂	E59-M18C116D01-D1PP 🙂
					2-meter cable	E59-M18C116C02-D3PP	E59-M18C116C02-D1PP
tandard Range	30 mm Di	ameter					
	6-48 Vdc	15 mm	Shielded	NPN (sinking)	4-pin micro DC connector	E59-M30A115D01-D3NN 🏽	E59-M30A115D01-D1NN 🏽
					2-meter cable	E59-M30A115C02-D3NN	E59-M30A115C02-D1NN
				PNP (sourcing)	4-pin micro DC connector	E59-M30A115D01-D3PP 🙂	E59-M30A115D01-D1PP 🙂
					2-meter cable	E59-M30A115C02-D3PP	E59-M30A115C02-D1PP
extended Range		29 mm	Unshielded	NPN (sinking)	4-pin micro DC connector	E59-M30C129D01-D3NN 🏵	E59-M30C129D01-D1NN 🔅
					2-meter cable	E59-M30C129C02-D3NN	E59-M30C129C02-D1NN
A A FR				PNP (sourcing)	4-pin micro DC connector	E59-M30C129D01-D3PP 🏽	E59-M30C129D01-D1PP 🕃
					2-meter cable	E59-M30C129C02-D3PP	E59-M30C129C02-D1PP

Notes

: See listing of compatible connector cables on Page V8-T3-15.

^① At this time, iProx Complementary and Dual Output models are not available with auto-sink/source detection. Therefore, PNP (sourcing) and NPN (sinking) models must be ordered separately.

Compatible Connector Cables

Standard Cables 1

	Current Rating at 600 V	Voltage Style	Number of Pins	Gauge	Length	Pin Configuration/Wire Colors (Face View Female Shown)	PVC Jacket Catalog Number	PUR Jacket Catalog Number
Micro-Style	Micro-Style,	Straight F	emale					
Straight Female		AC	3-pin, 3-wire	22 AWG	6.0 ft (2m)	(2) (3) 1-Green 2-Red/Black 3-Red/White	CSAS3F3CY2202	CSAS3F3RY2202
	_	DC	4-pin, 4-wire	22 AWG	6.0 ft (2m)	(1) (2) (4) (3) (4) (3) (4) (3) (4) (3) (4)	CSDS4A4CY2202	CSDS4A4RY2202
Mini-Style	Mini-Style, S	traight Fe	male		Catalog Number			
Straight Female	13 A	_	3-pin	16 AWG	6 ft (2m)	(1) (3) (2) 3-Green 2-Black 3-White	CSMS3F3CY1602	
Accessories	iProx Sens	ors						

	iProx Sensors	
	Description	Catalog Number
Software	Step-by-step programming software required to program iProx. Compatible with Microsoft Windows [®] and Windows [®] Mobile devices.	E59SW1
Cable	The iProx programming cable is used to program individual iProx sensors, providing a connection between the computer and the sensor. Connects to computer via a serial (RS-232) or USB port. (USB connection requires an adapter which is included with purchase.)	E59RP1
Labels	Field applied labels for iProx sensor (100 pcs)	E59LABEL

Note

 For a full selection of connector cables, see Tab 10, section 10.1.

3

iProx Sensors

Starter Kit



iProx Starter Kits

Description	Catalog Numbe
Interested in custom programming iProx sensors to fit y	our application?
These kits include everything needed to get the most out of iProx: a senso a micro connector cable (CSDS4A4CY2202) and ProxView software on CD	
Starter kit includes:	
12 mm AC unshielded iProx sensor (E59-M12C110A01-A1)	E5912ACKIT
12 mm DC unshielded iProx sensor (E59-M12C110D01-D1)	E5912DCKIT
18 mm AC unshielded iProx sensor (E59-M18C118A01-A1)	E5918ACKIT
18 mm DC unshielded iProx sensor (E59-M18C116D01-D1)	E5918DCKIT
30 mm AC unshielded iProx sensor (E59-M30C129A01-A1)	E5930ACKIT
30 mm DC unshielded iProx sensor (E59-M30C129D01-D1)	E5930DCKIT

Technical Data and Specifications

iProx Sensors

Description	Two-Wire Sensors	Three-Wire Sensors
Input voltage	20–132 Vac	6-48 Vdc
Load current	250 mA	300 mA
Leakage current	≤1.7 mA at 32 °F (0 °C), 2.0 mA at –40 °F (–40 °C)	≤150 µA
Voltage drop	<5 Vac	≤2.5 Vdc
Burden current	—	≤15 mA
Protection	None	Auto reset
Switching hysteresis	<15% rated sensing distance	<15% rated sensing distance
Repeat accuracy	Shielded models: <1% sensing distance; Unshielded models: <3% sensing distance	Shielded models: <1% sensing distance; Unshielded models: <3% sensing distance
Surge capacity	3 A/30 ms	_
Temperature range	-40 to 158 °F (-40 to 70 °C)	-40 to 158 °F (-40 to 70 °C)
Material of construction	303 stainless steel; end bells: polycarbonate; face caps: Ryton®; cable: AWM style 20387 (PVC)	303 stainless steel; end bells: polycarbonate; face caps: Ryton®; cable: AWM style 20387 (PVC)
Vibration and shock	Vibration: 10 to 55 Hz, 1 mm amplitude, IEC 60068-2-6; shock: 30 g, 11 ms per IEC 68-2-27	Vibration: 10 to 55 Hz, 1 mm amplitude, IEC 60068-2-6; shock: 30 g, 11 ms per IEC 68-2-27
Indicator LED	360° viewable LED	360° viewable LED
Enclosure ratings	NEMA 4, 4X, 6, 6P, 12 and 13 (IP67) IP69K ^①	NEMA 4, 4X, 6, 6P, 12 and 13 (IP67) IP69K ①

Response Time ²

Three-Wire Sensors							
	Two-Wire Sensors	Shielded			Unshielded		
Description	All Two-Wire Models	12 mm	18 mm	30 mm	12 mm	18 mm	30 mm
Factory default mode	Shipped in "Side by Side Mode" by default (20 V/m)	580 Hz (10 V/m)	390 Hz (10 V/m)	240 Hz (10 V/m)	300 Hz (10 V/m)	150 Hz (10 V/m)	145 Hz (10 V/m)
Side by side ^③	30 Hz (10 V/m)	50 Hz (20 V/m)	50 Hz (20 V/m)	50 Hz (20 V/m)	50 Hz (20 V/m)	50 Hz (20 V/m)	50 Hz (20 V/m)
High noise immunity mode	10 Hz (>20 V/m)	10 Hz (>20 V/m)	10 Hz (>20 V/m)	10 Hz (>20 V/m)	10 Hz (>20 V/m)	10 Hz (>20 V/m)	10 Hz (>20 V/m)

Notes

Ryton[®] is a registered trademark of Phillips Chemical (division of Phillips Petroleum).

① Our products conform to NEMA® tests as indicated, however, some severe washdown applications can exceed these NEMA test specifications.

(2) iProx sensors may be programmed to perform in side by side or high noise immunity applications using the iProx programming cable (E59RP1) and ProxView software (E59SW1).

③ Use the side by side response time parameter when using the iProx Tray Programmer (E59TP1), iProx programming cable (E59RP1) and ProxView software (E59SW1).

iProx Sensors

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.


iProx Sensors

Operating Voltage	Output	Cable Models	Connector Models (Face View Male Shown) Micro	Mini
Two-Wire S	Sensors			
20–132 Vac	NO and NC	BN L1 BU Load L2	L2 Load (3 2) L1	$ \begin{array}{c} \text{L1 or} \\ \text{+V} \\ \text{(1)} \\ \text{(2)} \\ \text{(3)} \\ \text{(-)} \\ ($
Three-Wire	Sensors			
6–48 Vdc	NO and NC (NPN and PNP) ^①	(2) BN BK BU (-)		_
Four-Wire I	Dual Output and Co	omplementary Sensors		
6–48 Vdc	NO and NC (NPN)	(3) BN +V BU (-) BL Load	() (-) () () () () () () () () () () () () ()	_
	NO and NC (PNP)	⁽³⁾ BN +V BU (-) BL Load	(-) Load (2) (1) +V (3) (4) Load	_

Dimensions


Approximate Dimensions in Inches (mm)

Cable Models

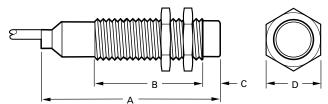

Size	Shielding	Α	В	C	D
12 mm	Shielded	2.46 (62.4)	1.98 (50.3)	0.02 (0.5)	0.67 (17)
	Unshielded	2.46 (62.4)	1.64 (41.6)	0.36 (9)	0.67 (17)
18 mm	Shielded	2.54 (64.5)	2.00 (50.9)	0.02 (0.5)	0.94 (24)
	Unshielded	2.54 (64.5)	1.47 (37.4)	0.55 (14)	0.94 (24)
30 mm	Shielded	2.74 (69.6)	2.13 (54.1)	0.03 (0.75)	1.41 (36)
	Unshielded	2.74 (69.6)	1.41 (35.8)	0.75 (19)	1.41 (36)

Micro-Connector Models

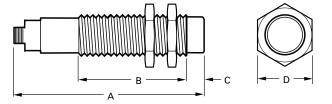

Size	Shielding	Α	В	C	D
12 mm	Shielded	2.71 (68.7)	1.98 (50.3)	0.02 (0.5)	0.67 (17)
	Unshielded	2.71 (68.7)	1.64 (41.6)	0.36 (9)	0.67 (17)
18 mm	Shielded	2.73 (69.3)	2.00 (50.9)	0.02 (0.5)	0.94 (24)
	Unshielded	2.73 (69.3)	1.47 (37.4)	0.55 (14)	0.94 (24)
30 mm	Shielded	2.92 (74.1)	2.13 (54.1)	0.03 (0.75)	1.41 (36)
	Unshielded	2.92 (74.1)	1.41 (35.8)	0.75 (19)	1.41 (36)

Notes

① The three-wire DC version of iProx automatically configures itself to NPN or PNP based on field wiring. No user intervention is required.

⁽²⁾ Pin numbers 2 and 4 are internally jumpered together. Either pin may be used.

③ The complementary (1NO-1NC) output models feature the NC output on pin 2 (white).

E57P Performance Series Sensors

E57P Performance Series Sensors



E57P Performance Series Sensors

Product Description

For sensing applications requiring more demanding specifications, the new E57P Performance series incorporates premium features without the premium price. With its stainless steel tubular body, IP69K rating, wide temperature range (down to -40 °C), fast switching speed and laser-etched markings, the E57P series provides value at a low price point.

Features

- 360° LED indicator
- Stainless steel tube
- 10–48 Vdc operating voltage
- Short-circuit protection
 -40 to 70 °C temperature range
- IP69K environmental rating
- Durable laser-engraved
 label
- Available in cable and micro-connector styles

Contents

Description	Page
E57P Performance Series Sensors	
Product Selection	
E57P Performance Sensors	V8-T3-19
Compatible Connector Cables	V8-T3-20
Accessories	V8-T3-20
Technical Data and Specifications	V8-T3-21
Wiring Diagrams	V8-T3-22
Dimensions	V8-T3-23

Standards and Certifications

cULus Listed





DANGER

THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

For the most current information on this product, visit our Web site: www.eaton.com For Customer Service in the U.S. call 1-877-ETN CARE (386-2273), in Canada call 1-800-268-3578. For Application Assistance in the U.S. and Canada call 1-800-426-9184.

E57P Performance Series Sensors

Inductive Proximity Sensors

Product Selection

E57P Performance Sensors

	Three-Wire Sensors							
	Operating Voltage	Sensing Range (Sn)	Shielding	Connection Type $^{(1)}$	NO Output Catalog Number	NC Output Catalog Number		
	12 mm Diar	neter End Sensing						
	10-48 Vdc	2 mm	Shielded	2-meter cable	E57P-12SPN2-C2	E57P-12SPC2-C2		
1		(standard range)	(PNP)	4-pin micro DC connector	E57P-12SPN2-Q	E57P-12SPC2-Q		
			Shielded	2-meter cable	E57P-12SNN2-C2	E57P-12SNC2-C2		
			(NPN)	4-pin micro DC connector	E57P-12SNN2-Q	E57P-12SNC2-Q		
		4 mm	Unshielded	2-meter cable	E57P-12UPN4-C2	E57P-12UPC4-C2		
		(standard range)	(PNP)	4-pin micro DC connector	E57P-12UPN4-Q	E57P-12UPC4-Q		
			Unshielded	2-meter cable	E57P-12UNN4-C2	E57P-12UNC4-C2		
			(NPN)	4-pin micro DC connector	E57P-12UNN4-Q	E57P-12UNC4-Q		
		4 mm	Shielded	2-meter cable	E57P-12SPN4-C2	E57P-12SPC4-C2		
		(extended range)	(PNP)	4-pin micro DC connector	E57P-12SPN4-Q	E57P-12SPC4-Q		
			Shielded	2-meter cable	E57P-12SNN4-C2	E57P-12SNC4-C2		
			(NPN)	4-pin micro DC connector	E57P-12SNN4-Q	E57P-12SNC4-0		
		8 mm (extended range)	Unshielded (PNP)	2-meter cable	E57P-12UPN8-C2	E57P-12UPC8-C2		
				4-pin micro DC connector	E57P-12UPN8-Q	E57P-12UPC8-Q		
			Unshielded	2-meter cable	E57P-12UNN8-C2	E57P-12UNC8-C2		
			(NPN)	4-pin micro DC connector	E57P-12UNN8-Q	E57P-12UNC8-Q		
	18 mm Diar	neter End Sensing						
-	10-48 Vdc	5 mm	Shielded (PNP)	2-meter cable	E57P-18SPN5-C2	E57P-18SPC5-C2		
-		(standard range)		4-pin micro DC connector	E57P-18SPN5-Q	E57P-18SPC5-Q		
			Shielded (NPN)	2-meter cable	E57P-18SNN5-C2	E57P-18SNC5-C2		
				4-pin micro DC connector	E57P-18SNN5-Q	E57P-18SNC5-Q		
		8 mm	Unshielded	2-meter cable	E57P-18UPN8-C2	E57P-18UPC8-C2		
		(standard range)	(PNP)	4-pin micro DC connector	E57P-18UPN8-Q	E57P-18UPC8-Q		
			Unshielded	2-meter cable	E57P-18UNN8-C2	E57P-18UNC8-C2		
			(NPN)	4-pin micro DC connector	E57P-18UNN8-Q	E57P-18UNC8-Q		
		8 mm	Shielded	2-meter cable	E57P-18SPN8-C2	E57P-18SPC8-C2		
		(extended range)	(PNP)	4-pin micro DC connector	E57P-18SPN8-Q	E57P-18SPC8-Q		
			Shielded	2-meter cable	E57P-18SNN8-C2	E57P-18SNC8-C2		
			(NPN)	4-pin micro DC connector	E57P-18SNN8-Q	E57P-18SNC8-Q		
		12 mm	Unshielded	2-meter cable	E57P-18UPN12-C2	E57P-18UPC12-C2		
		(extended range)	(PNP)	4-pin micro DC connector	E57P-18UPN12-Q	E57P-18UPC12-Q		
			Unshielded	2-meter cable	E57P-18UNN12-C2	E57P-18UNC12-C2		
			(NPN)	4-pin micro DC connector	E57P-18UNN12-Q	E57P-18UNC12-Q		

Notes

 $\textcircled{\begin{tabular}{ll} \textcircled{\begin{tabular}{ll} \hline \hline \\ \hline \end{array}}}$ See listing of compatible connector cables on Page V8-T3-20.

[©] For cable lengths longer than 2 meters, add the number of the desired length in meters to the end of the listed catalog number (for catalog numbers ending with a number, add an S and then the length). Examples for a 5-meter cable: E57-18LE12-A becomes E57-18LE12-A5; E57LAL12A2 becomes E57LAL12A2S5.

3

E57P Performance Series Sensors

30 mm 3

Three-Wire	Sensors,	continued
------------	----------	-----------

Operating Voltage	Sensing Range (Sn)	Shielding	Connection Type $^{\left(1\right) }$	NO Output Catalog Number	NC Output Catalog Number
30 mm Dian	neter End Sensing				
10–48 Vdc	10 mm	Shielded	2-meter cable	E57P-30SPN10-C2	E57P-30SPC10-C2
	(standard range)	(PNP)	4-pin micro DC connector	E57P-30SPN10-Q	E57P-30SPC10-Q
		Shielded	2-meter cable	E57P-30SNN10-C2	E57P-30SNC10-C2
		(NPN)	4-pin micro DC connector	E57P-30SNN10-Q	E57P-30SNC10-Q
	15 mm	Unshielded	2-meter cable	E57P-30UPN15-C2	E57P-30UPC15-C2
	(standard range)	(PNP)	4-pin micro DC connector	E57P-30UPN15-Q	E57P-30UPC15-Q
		Unshielded	2-meter cable	E57P-30UNN15-C2	E57P-30UNC15-C2
		(NPN)	4-pin micro DC connector	E57P-30UNN15-Q	E57P-30UNC15-Q
	15 mm	Shielded	2-meter cable	E57P-30SPN15-C2	E57P-30SPC15-C2
	(extended range)	(PNP)	4-pin micro DC connector	E57P-30SPN15-Q	E57P-30SPC15-Q
		Shielded	2-meter cable	E57P-30SNN15-C2	E57P-30SNC15-C2
		(NPN)	4-pin micro DC connector	E57P-30SNN15-Q	E57P-30SNC15-Q
	22 mm	Unshielded	2-meter cable	E57P-30UPN22-C2	E57P-30UPC22-C2
	(extended range)	(PNP)	4-pin micro DC connector	E57P-30UPN22-Q	E57P-30UPC22-Q
		Unshielded	2-meter cable	E57P-30UNN22-C2	E57P-30UNC22-C2
		(NPN)	4-pin micro DC connector	E57P-30UNN22-Q	E57P-30UNC22-Q

Compatible Connector Cables

Standard Cables ①

	Current Rating at 600 V	Voltage Style	Number of Pins	Gauge	Length	Pin Configuration/Wire Colors (Face View Female Shown)	PVC Jacket Catalog Number	PUR Jacket Catalog Number
Micro-Style	Micro-Style,	Straight Fen	nale					
Straight Female		DC	4-pin, 4-wire	22 AWG	6.0 ft (2m)	1-Brown 2-White 3-Blue 4-Black	CSDS4A4CY2202	CSDS4A4RY2202

Accessories

E57P Performance Sensors

Description	Reference
Mounting brackets	See Tab 8, section 8.2
Replacement mounting nuts and other accessories	See Tab 8, section 8.3
Connector cables	See Tab 10, section 10.1

Notes

(a) See listing of compatible connector cables on Page V8-T3-20.

^① For cable lengths longer than 2 meters, add the number of the desired length in meters to the end of the listed catalog number (for catalog numbers ending with a number, add an S and then the length). Examples for a 5-meter cable: E57-18LE12-A becomes E57-18LE12-A5; E57LAL12A2 becomes E57LAL12A2S5.

 $^{(2)}\,$ For a full selection of connector cables, see Tab 10, section 10.1.

3

Inductive Proximity Sensors

Technical Data and Specifications


E57P Performance Sensors

Description	Performance Three-Wire DC Sensors
Operating voltage	10-48 Vdc
Output current (continuous)	300 mA
Switching frequency [Hz]	Standard range: 12 mm—Shielded: 2000; Unshielded: 2000 18 mm—Shielded: 1200; Unshielded: 1200 30 mm—Shielded: 600; Unshielded: 500 Extended range: 12 mm—Shielded: 1200; Unshielded: 500 18 mm—Shielded: 300; Unshielded: 300 30 mm—Shielded: 400; Unshielded: 200
Leakage current	<100 µA
Output voltage drop [Vsat]	<2.5 V
Current consumption	<10 mA
Short-circuit protection	Yes (Auto Reset)
Hysteresis [% of Sr]	2–20%
Repeat accuracy	1% shielded, 3% unshielded
Time delay before availability	<200 ms
Output indicator LED	360° amber LED
Operating temperature range	–40 to 70 °C
Ingress protection	IEC IP67, IP69K, UL Type 1, NEMA Type 6P, NEMA Type 4X
Shock	30 g, 11 ms per IEC 68-2-76
Vibration	10 to 55 Hz, 1 mm amplitude
Housing materials	Front face: Ryton Tube: Stainless steel End bells: M12 body: Polycarbonate Cable end bell: Polycarbonate Nuts: Stainless steel
Cable	AWM style 20387 (PVC)

Recommended Mounting Clearances

For unshielded standard range sensors and extended range sensors, clearance must be provided around the sensor when mounting for reliable performance. ("Sn" is the sensing range of the sensor, "d" is the sensor diameter.)

E57P Performance Sensors, Mounting

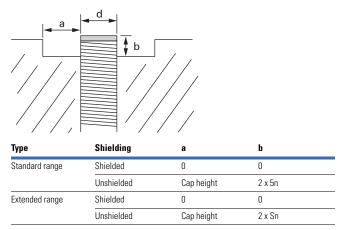

Note

Ryton® is a registered trademark of Phillips Chemical (division of Phillips Petroleum).

 $^{(1)}$ 40–240 Vac at <–4 °F (<–20 °C).

E57P Performance Series Sensors

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.

E57P Performance Sensors

Operating Voltage	Output	Cable Models	Connector Models (Face View Male Shown) Micro
Three-Wire Se	nsors		
10-48 Vdc	NO (NPN)	BN +V BK Load BU (-)	(-) (2 (1) +V (3 (4) Load
	NO (PNP)	BN +V BK Load BU (_)	(-) Load (2) (1) +V
	NC (NPN)	BN +V BK Load BU (-)	(-) (2 (1) +V (3) (4) +V
	NC (PNP)	BN +V BK Load BU (_)	(-) Load (2 (1) +V (3 (4) +V

3

Inductive Proximity Sensors


E57P Performance Series Sensors

Dimensions


Approximate Dimensions in Inches (mm)

E57P Performance Series Sensors, End Sensing ⁽¹⁾

Cable Models

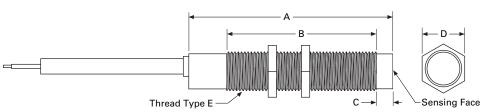

Connector Models

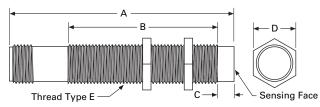

Size	Shielding	Overall Length A	Threaded Length B	Cap Height C	Nut Width D	Thread Size E
Three-Wire D	C Sensors—Cable Mode	els				
12 mm	Shielded	2.52 (64.1)	1.98 (50.3)	_	0.67 (16.8)	M12 x 1
	Unshielded	2.52 (64.1)	1.80 (45.8)	0.20 (5.0)	0.67 (16.8)	M12 x 1
18 mm	Shielded	2.59 (65.9)	2.00 (50.9)	_	0.94 (23.8)	M18 x 1
	Unshielded	2.59 (65.9)	1.75 (44.4)	0.28 (7.0)	0.94 (23.8)	M18 x 1
30 mm	Shielded	2.67 (67.7)	1.98 (50.3)	_	1.41 (35.9)	M30 x 1.5
	Unshielded	2.67 (67.7)	1.49 (37.8)	0.51 (13.0)	1.41 (35.9)	M30 x 1.5
Three-Wire DO	C Sensors-Micro-Conn	ector Models				
12 mm	Shielded	2.70 (68.7)	1.98 (50.3)	_	0.67 (16.8)	M12 x 1
	Unshielded	2.70 (68.7)	1.80 (45.8)	0.20 (5.0)	0.67 (16.8)	M12 x 1
18 mm	Shielded	2.72 (69.2)	2.00 (50.9)	_	0.94 (23.8)	M18 x 1
	Unshielded	2.72 (69.2)	1.75 (44.4)	0.28 (7.0)	0.94 (23.8)	M18 x 1
30 mm	Shielded	2.79 (70.9)	1.98 (50.3)	_	1.41 (35.9)	M30 x 1.5
	Unshielded	2.79 (70.9)	1.49 (37.8)	0.51 (13.0)	1.41 (35.9)	M30 x 1.5

Note

 $\textcircled{\sc 0}$ These dimensions apply to the Performance Series models in this section.

E57PS Performance Short Body Sensors

E57PS Performance Short Body Sensors



E57PS Performance Short Body Sensors

Product Description

For demanding sensing applications in areas too small for standard length units, the E57PS Performance Short Body series is an ideal solution as it incorporates the premium features of the E57P series but in a shorter body length. With its stainless steel tubular body, IP69K rating, wide temperature range (down to -40 °C), fast switching speed and laser-etched markings, the E57PS series provides value at a low price point.

Features

- 360° LED indicator
- Stainless steel tube
- 10–48 Vdc operating voltage
- Short-circuit protection
 -40 to 70 °C temperature range
- IP69K environmental rating
- Durable laser-engraved label
- Available in cable and micro-connector styles

Contents

Description	Page
E57PS Performance Short Body Sensors	
Product Selection	
E57PS Performance Short Body Sensors	V8-T3-25
Compatible Connector Cables	V8-T3-25
Accessories	V8-T3-26
Technical Data and Specifications	V8-T3-26
Wiring Diagrams	V8-T3-27
Dimensions	V8-T3-27

Standards and Certifications

cULus Listed

• CE



DANGER

THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

For the most current information on this product, visit our Web site: www.eaton.com

Product Selection

E57PS Performance Short Body Sensors

Operating Voltage	Sensing Range (Sn)	Shielding	Connection Type $^{(1)}$	NO Output Catalog Number	NC Output Catalog Number				
12 mm Dia	ameter								
10–48 Vdc						Shielded	2-meter cable	E57PS-12SPN2-C2	E57PS-12SPC2-C2
	(standard range)	(PNP)	4-pin micro DC connector	E57PS-12SPN2-Q 🏽	E57PS-12SPC2-Q 🙂				
		Shielded	2-meter cable	E57PS-12SNN2-C2	E57PS-12SNC2-C2				
		(NPN)	4-pin micro DC connector	E57PS-12SNN2-Q 🙂	E57PS-12SNC2-Q 🏽				
	4 mm	Unshielded	2-meter cable	E57PS-12UPN4-C2	E57PS-12UPC4-C2				
	(standard range)	(PNP)	4-pin micro DC connector	E57PS-12UPN4-Q 🏽	E57PS-12UPC4-Q 🏽				
		Unshielded	2-meter cable	E57PS-12UNN4-C2	E57PS-12UNC4-C2				
		(NPN)	4-pin micro DC connector	E57PS-12UNN4-Q 🏽	E57PS-12UNC4-Q 🖲				
18 mm Dia	ameter								
10-48 Vdc	0–48 Vdc 5 mm (standard range)	Shielded	2-meter cable	E57PS-18SPN5-C2	E57PS-18SPC5-C2				
1		(PNP)	4-pin micro DC connector	E57PS-18SPN5-Q 🕄	E57PS-18SPC5-Q 🏽				
		Shielded (NPN)	2-meter cable	E57PS-18SNN5-C2	E57PS-18SNC5-C2				
			4-pin micro DC connector	E57PS-18SNN5-Q 🕄	E57PS-18SNC5-Q 🖲				
	8 mm	Unshielded	2-meter cable	E57PS-18UPN8-C2	E57PS-18UPC8-C2				
	(standard range)	(PNP)	4-pin micro DC connector	E57PS-18UPN8-Q 🏵	E57PS-18UPC8-Q 🌐				
		Unshielded	2-meter cable	E57PS-18UNN8-C2	E57PS-18UNC8-C2				
		(NPN)	4-pin micro DC connector	E57PS-18UNN8-Q 🏽	E57PS-18UNC8-Q				
30 mm Di	ameter								
10-48 Vdc	10 mm	Shielded	2-meter cable	E57PS-30SPN10-C2	E57PS-30SPC10-C2				
	(standard range)	(PNP)	4-pin micro DC connector	E57PS-30SPN10-Q 🏽	E57PS-30SPC10-Q				
			Shielded	2-meter cable	E57PS-30SNN10-C2	E57PS-30SNC10-C2			
		(NPN)	4-pin micro DC connector	E57PS-30SNN10-Q 🙂	E57PS-30SNC10-Q				
	15 mm	Unshielded	2-meter cable	E57PS-30UPN15-C2	E57PS-30UPC15-C2				
	(standard range)	(PNP)	4-pin micro DC connector	E57PS-30UPN15-Q 🕄	E57PS-30UPC15-Q				
		Unshielded	2-meter cable	E57PS-30UNN15-C2	E57PS-30UNC15-C2				
		(NPN)	4-pin micro DC connector	E57PS-30UNN15-Q 🏟	E57PS-30UNC15-Q				

Compatible Connector Cables

	Standard Cables						
	Voltage Style	Number of Pins	Gauge	Length	Pin Configuration/Wire Colors (Face View Female Shown)	PVC Jacket Catalog Number	PUR Jacket Catalog Number
licro-Style	Micro-Style	e, Straight Fema	ale				
traight Female	DC	4-pin, 4-wire	22 AWG	6.0 ft (2m)	(1) (2) (4) (3) (4) (3) (4) (3) (4)	CSDS4A4CY2202	CSDS4A4RY2202

Notes

 $\textcircled{\ensuremath{\textbf{s}}}$ See listing of compatible connector cables above.

© Cable models are supplied as standard with a 2-meter cable. A 5-meter cable is available by adding S5 to the catalog number. Example: E57SAL12T110 becomes E57SAL12T110S5.

⁽²⁾ For a full selection of connector cables, see Tab 10, section 10.1.

Accessories

E57PS Performance Short Body Sensors Description Reference

Mounting brackets	See Tab 8, section 8.2
Replacement mounting nuts and other accessories	See Tab 8, section 8.3
Connector cables	See Tab 10, section 10.1

Technical Data and Specifications

E57PS Performance Short Body Sensors

Description	Three-Wire DC Sensors		
Operating voltage	10-48 Vdc		
Maximum load current	300 mA		
Switching frequency [Hz]	12 mm—Shielded: 2000; Unshielded: 2000 18 mm—Shielded: 1200; Unshielded: 1200 30 mm—Shielded: 600; Unshielded: 500		
Leakage current	100 µA maximum		
Voltage drop	≤2.5 V		
Holding current	≤10 mA		
Short-circuit protection	Yes (Auto Reset)		
Switching hysteresis	2–20% of rated sensing distance		
Repeat accuracy	1% shielded, 3% unshielded		
Output indicator LED	360° amber LED		
Operating temperature	–40 to 158 °F (–40 to 70 °C)		
Enclosure ratings	IP67, IP69K; NEMA 4, 4X, 6, 6P		
Shock	30 g sine wave, 11 ms per IEC68-2-76		
Vibration	10 to 55 Hz, 1 mm amplitude		
Material of construction	Stainless steel, polycarbonate end bells, Ryton® front cap		
Cable	AWM Style 20387 (PVC)		

Note

Ryton[®] is a registered trademark of Phillips Chemical (division of Phillips Petroleum).

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.

E57PS Performance Short Body Sensors					
Operating Voltage	Output	Cable Models	Micro-Connector Models (Face View Male Shown)		
Three-Wire Se	nsors				
10–48 Vdc	NO (NPN)	BK +V BK Load (-)	(-) (2) (1) +V (3) (4) Load		
	NO (PNP)	BK Load (_)	(-) (2) (1) +V Load		
	NC (NPN)	BN +V BK Load BU (-)	(-) (2 (1) +V (3 (4) +V		
	NC (PNP)	BN +V BK Load (_)	(-) Load (2) (1) +V (3) (4) +V		

Dimensions

Approximate Dimensions in Inches (mm)


E57PS Performance Short Body Sensors—Cable Models


12 mm

D

Sensing Face

С







			=
1.61 (40.9)	1.07 (27.2)	_	M12 x 1
1.61 (40.9)	0.89 (22.7)	0.20 (5.0)	M12 x 1
1.77 (44.9)	1.17 (29.8)	_	M18 x 1
1.77 (44.9)	0.92 (23.3)	0.28 (7.0)	M18 x 1
1.84 (46.6)	1.15 (29.3)	_	M30 x 1.5
1.84 (46.6)	0.66 (16.8)	0.51 (13.0)	M30 x 1.5
	1.61 (40.9) 1.77 (44.9) 1.77 (44.9) 1.84 (46.6)	1.61 (40.9) 0.89 (22.7) 1.77 (44.9) 1.17 (29.8) 1.77 (44.9) 0.92 (23.3) 1.84 (46.6) 1.15 (29.3)	1.61 (40.9) 0.89 (22.7) 0.20 (5.0) 1.77 (44.9) 1.17 (29.8) 1.77 (44.9) 0.92 (23.3) 0.28 (7.0) 1.84 (46.6) 1.15 (29.3)


E57PS Performance Short Body Sensors

Approximate Dimensions in Inches (mm)

E57PS Performance Short Body Sensors—Micro-Connector Models







Size	Shielding	Overall Length A	Threaded Length B	Cap Height C	Thread Size D	
Three-Wire D	C Sensors					
12 mm	Shielded	1.64 (41.5)	1.07 (27.2)	_	M12 x 1	
	Unshielded	1.64 (41.5)	0.89 (22.7)	0.20 (5.0)	M12 x 1	
18 mm	Shielded	1.59 (40.3)	1.17 (29.8)	_	M18 x 1	
	Unshielded	1.59 (40.3)	0.92 (23.3)	0.28 (7.0)	M18 x 1	
30 mm	Shielded	1.77 (45.0)	1.15 (29.3)	_	M30 x 1.5	
	Unshielded	1.96 (49.7)	0.66 (16.8)	0.51 (13.0)	M30 x 1.5	

E57G General Purpose Proximity Sensors

E57G General Purpose Proximity Sensors



Description	Page
E57G General Purpose Proximity Sensors	
Product Selection	_
E57G General Purpose Proximity Sensors	V8-T3-30
Compatible Connector Cables	V8-T3-31
Accessories	V8-T3-31
Technical Data and Specifications	V8-T3-32
Wiring Diagrams	V8-T3-33
Dimensions	V8-T3-34

E57G General Purpose Proximity Sensors

Product Description

For global sensing applications, the E57G General Purpose series is designed for most standard inductive sensing needs. With its stainless steel tubular body, 360 degree visible LED, fast switching speed and laser-etched markings, the E57G series is an ideal cost-effective solution.

Features

- 360° LED indicator
- Stainless steel tube
- 10–30 Vdc operating voltage
- Short-circuit protection
- –25 to 70 °C temperature range
- IP67 environmental rating
- Durable laser-engraved label
- Available in cable and micro-connector styles
- Nickel-brass mounting nuts

Standards and Certifications

• cULus Listed



DANGER

THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

Product Selection

E57G General Purpose Proximity Sensors

	Three-Wi	re Sensors					
	Operating Voltage	Sensing Range	Shielding	Output Type	Connection Type	NO Output Catalog Number	NC Output Catalog Number
	12 mm Dia	meter					
	10-30 Vdc	2 mm	Shielded	PNP	2-meter cable	E57G-12SPN2-C2	E57G-12SPC2-C2
-CI		(standard range)			4-pin micro DC connector	E57G-12SPN2-Q	E57G-12SPC2-Q
1-				NPN	2-meter cable	E57G-12SNN2-C2	E57G-12SNC2-C2
					4-pin micro DC connector	E57G-12SNN2-Q	E57G-12SNC2-Q
		4 mm	Unshielded	PNP	2-meter cable	E57G-12UPN4-C2	E57G-12UPC4-C2
		(standard range)			4-pin micro DC connector	E57G-12UPN4-Q	E57G-12UPC4-Q
				NPN	2-meter cable	E57G-12UNN4-C2	E57G-12UNC4-C2
					4-pin micro DC connector	E57G-12UNN4-Q	E57G-12UNC4-Q
		4 mm	Shielded	PNP	2-meter cable	E57G-12SPN4-C2	E57G-12SPC4-C2
		(extended range)			4-pin micro DC connector	E57G-12SPN4-Q	E57G-12SPC4-Q
				NPN	2-meter cable	E57G-12SNN4-C2	E57G-12SNC4-C2
					4-pin micro DC connector	E57G-12SNN4-Q	E57G-12SNC4-Q
		8 mm	Unshielded	PNP	2-meter cable	E57G-12UPN8-C2	E57G-12UPC8-C2
		(extended range)			4-pin micro DC connector	E57G-12UPN8-Q	E57G-12UPC8-Q
				NPN	2-meter cable	E57G-12UNN8-C2	E57G-12UNC8-C2
					4-pin micro DC connector	E57G-12UNN8-Q	E57G-12UNC8-Q
	18 mm Dia	meter					
AN	10-30 Vdc	dc 5 mm (standard range)	Shielded	PNP	2-meter cable	E57G-18SPN5-C2	E57G-18SPC5-C2
					4-pin micro DC connector	E57G-18SPN5-Q	E57G-18SPC5-Q
				NPN	2-meter cable	E57G-18SNN5-C2	E57G-18SNC5-C2
					4-pin micro DC connector	E57G-18SNN5-Q	E57G-18SNC5-Q
		8 mm	Unshielded	PNP	2-meter cable	E57G-18UPN8-C2	E57G-18UPC8-C2
		(standard range)			4-pin micro DC connector	E57G-18UPN8-Q	E57G-18UPC8-Q
				NPN	2-meter cable	E57G-18UNN8-C2	E57G-18UNC8-C2
					4-pin micro DC connector	E57G-18UNN8-Q	E57G-18UNC8-Q
		8 mm	Shielded	PNP	2-meter cable	E57G-18SPN8-C2	E57G-18SPC8-C2
		(extended range)			4-pin micro DC connector	E57G-18SPN8-Q	E57G-18SPC8-Q
				NPN	2-meter cable	E57G-18SNN8-C2	E57G-18SNC8-C2
					4-pin micro DC connector	E57G-18SNN8-Q	E57G-18SNC8-Q
		12 mm	Unshielded	PNP	2-meter cable	E57G-18UPN12-C2	E57G-18UPC12-C2
		(extended range)			4-pin micro DC connector	E57G-18UPN12-Q	E57G-18UPC12-Q
				NPN	2-meter cable	E57G-18UNN12-C2	E57G-18UNC12-C2

Note

 $\textcircled{\label{eq:second} \ensuremath{\mathfrak{S}} \ensurem$

E57G General Purpose Proximity Sensors

Three-Wire Sensors, continued



Operating Voltage	Sensing Range	Shielding	Output Type	Connection Type	NO Output Catalog Number	NC Output Catalog Number
30 mm Diai	neter					
10-30 Vdc	10 mm	Shielded	PNP	2-meter cable	E57G-30SPN10-C2	E57G-30SPC10-C2
	(standard range)			4-pin micro DC connector	E57G-30SPN10-Q	E57G-30SPC10-Q
			NPN	2-meter cable	E57G-30SNN10-C2	E57G-30SNC10-C2
				4-pin micro DC connector	E57G-30SNN10-Q	E57G-30SNC10-Q
	15 mm	Unshielded	PNP	2-meter cable	E57G-30UPN15-C2	E57G-30UPC15-C2
	(standard range)			4-pin micro DC connector	E57G-30UPN15-Q	E57G-30UPC15-Q
			NPN	2-meter cable	E57G-30UNN15-C2	E57G-30UNC15-C2
				4-pin micro DC connector	E57G-30UNN15-Q	E57G-30UNC15-Q
	15 mm	Shielded	PNP	2-meter cable	E57G-30SPN15-C2	E57G-30SPC15-C2
	(extended range)			4-pin micro DC connector	E57G-30SPN15-Q	E57G-30SPC15-Q
			NPN	2-meter cable	E57G-30SNN15-C2	E57G-30SNC15-C2
				4-pin micro DC connector	E57G-30SNN15-Q	E57G-30SNC15-Q
	22 mm	Unshielded	PNP	2-meter cable	E57G-30UPN22-C2	E57G-30UPC22-C2
	(extended range)			4-pin micro DC connector	E57G-30UPN22-Q	E57G-30UPC22-Q
			NPN	2-meter cable	E57G-30UNN22-C2	E57G-30UNC22-C2
				4-pin micro DC connector	E57G-30UNN22-Q	E57G-30UNC22-Q

Compatible Connector Cables

	Standard Cables ®							
	Voltage Style	Number of Pins	Gauge	Length	Pin Configuration/Wire Colors (Face View Female Shown)	PVC Jacket Catalog Number	PUR Jacket Catalog Number	
Micro-Style	Micro-Style, Straight Female							
Straight Female	DC	4-pin, 3-wire	22 AWG	6.0 ft (2m)	1-Brown 2-No Wire 3-Blue 4-Black	CSDS4A3CY2202	CSDS4A3RY2202	

Accessories

E57G General Purpose Proximity Sensors

Description	Reference
Mounting brackets	See Tab 8, section 8.2
Replacement mounting nuts and other accessories	See Tab 8, section 8.3
Connector cables	See Tab 10, section 10.1

Notes

(B) See listing of compatible connector cables on Page V8-T3-31.

 $^{\textcircled{}}$ For a full selection of connector cables, see Tab 10, section 10.1.

E57G General Purpose Proximity Sensors

Technical Data and Specifications

E57G General Purpose Proximity Sensors

Description	Three-Wire DC Sensors
Operating voltage	10-30 Vdc
Output current (continuous)	100 mA
Switching frequency [Hz]	Standard range: 12 mm—Shielded: 2000; Unshielded: 2000 18 mm—Shielded: 1200; Unshielded: 1200 30 mm—Shielded: 600; Unshielded: 500 Extended range: 12 mm—Shielded: 1200; Unshielded: 500 18 mm—Shielded: 300; Unshielded: 300 30 mm—Shielded: 400; Unshielded: 200
Leakage current	<100 µA
Output voltage drop [Vsat]	<2.5 V
Current consumption	<10 mA
Short-circuit protection	Yes (Auto Reset)
Hysteresis [% of Sr]	2–20%
Repeat accuracy	1% shielded, 3% unshielded
Time delay before availability	<200 ms
Output indicator LED	360° amber LED
Operating temperature range	−25 to 70 °C
Ingress protection	IEC IP67, UL Type 1
Mechanical shock	IEC 60947-5-2 30 G half-sine wave, 11 mS
Vibration	IEC 60947-5-2 10–55 Hz, 1 mm amplitude
Housing materials	Front face: Ryton Tube: stainless steel End bells: M12 body: Polycarbonate Cable end bell: Polycarbonate Nuts: Ni-Brass
Cable	AWM style 20387 (PVC)

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.

E57G General Purpose Proximity Sensors

Operating Voltage	Output	Cable Models	Connector Models (Face View Male Shown) Micro
Three-Wire	Sensors		
10–30 Vdc	NO (NPN)	BN +V BK Load (-)	(-) (2) (1) +V (3) (4) Load
	NO (PNP)	BN +V BK Load BU (_)	(-) (2) (1) +V Load
	NC (NPN)	BN +V BK Load BU (-)	(-) (2) (1) +V (3) (4)
	NC (PNP)	BN +V BK Load BU (_)	(-) Load (2) (1) +V (3) (4) +V

3


E57G General Purpose Proximity Sensors

Dimensions


Approximate Dimensions in Inches (mm)

E57G General Purpose Proximity Sensors

3

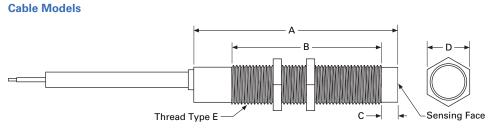

Connector Models

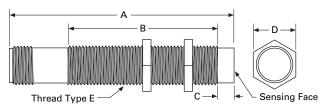

Size	Shielding	Overall Length A	Threaded Length B	Cap Height C	Nut Width D	Thread Size E
Three-Wire D	C Sensors—Cable Mode	els				
12 mm	Shielded	2.52 (64.1)	1.98 (50.3)	_	0.67 (16.8)	M12 x 1
	Unshielded	2.52 (64.1)	1.80 (45.8)	0.20 (5.0)	0.67 (16.8)	M12 x 1
18 mm	Shielded	2.59 (65.9)	2.00 (50.9)	_	0.94 (23.8)	M18 x 1
	Unshielded	2.59 (65.9)	1.75 (44.4)	0.28 (7.0)	0.94 (23.8)	M18 x 1
30 mm	Shielded	2.67 (67.7)	1.98 (50.3)		1.41 (35.9)	M30 x 1.5
	Unshielded	2.67 (67.7)	1.49 (37.8)	0.51 (13.0)	1.41 (35.9)	M30 x 1.5
Three-Wire D	C Sensors—Micro-Conn	ector Models				
12 mm	Shielded	2.70 (68.7)	1.98 (50.3)	_	0.67 (16.8)	M12 x 1
	Unshielded	2.70 (68.7)	1.80 (45.8)	0.20 (5.0)	0.67 (16.8)	M12 x 1
18 mm	Shielded	2.72 (69.2)	2.00 (50.9)	_	0.94 (23.8)	M18 x 1
	Unshielded	2.72 (69.2)	1.75 (44.4)	0.28 (7.0)	0.94 (23.8)	M18 x 1
30 mm	Shielded	2.79 (70.9)	1.98 (50.3)	_	1.41 (35.9)	M30 x 1.5
	Unshielded	2.79 (70.9)	1.49 (37.8)	0.51 (13.0)	1.41 (35.9)	M30 x 1.5

E57 Two-Wire (AC, AC/DC, DC) Proximity Sensors

E57 Two-Wire (AC, AC/DC, DC) Proximity Sensors



Contents

Description	Page
E57 Two-Wire (AC, AC/DC, DC) Proximity Sensors	
Product Selection	
Stainless Steel Body (Standard Length)	V8-T3-36
Stainless Steel Short Body	V8-T3-38
Nickel-Brass Body	V8-T3-39
Compatible Connector Cables	V8-T3-40
Accessories	V8-T3-40
Technical Data and Specifications	V8-T3-41
Wiring Diagrams	V8-T3-43
Dimensions	V8-T3-45

DANGER

THIS SENSOR IS NOT A

SAFETY DEVICE AND IS NOT

INTENDED TO BE USED AS A

SAFETY DEVICE. This sensor

is designed only to detect

and read certain data in an

perform no use apart from

that, specifically no safety-

related use. This sensor

product does not include

self-checking redundant

circuitry, and the failure of

this sensor product could

cause either an energized

condition, which could result

injury, or property damage.

or de-energized output

in death, serious bodily

electronic manner and

E57 Two-Wire (AC, AC/DC, DC) Proximity Sensors

Product Description

Eaton carries several options for your sensing needs in the E57 two-wire family. The stainless steel models are available in a standard length or short body, while available in AC or AC/DC configurations. The nickelbrass body models are available in standard length and either AC or DC two-wire configurations.


All of these are available in NPN or PNP with cable connections or micro connectors. The stainless steel standard length models are also available with mini connectors.

The stainless steel models in both lengths have 360 degree LEDs while the nickel-brass models have a single LED indicator.

Extended sensing ranges are also available in the stainless steel and nickelbrass standard length models, while shielded and unshielded models are offered throughout the E57 two-wire sensor products.

Standards and Certifications

Stainless steel body:





Nickel-brass body:

- cCSAus
- CE (DC models only)

CE

Highlighted Comparisons

Description	Stainless Steel	Stainless Steel Short Body	Nickel-Brass
Current ratings	250–500 mA	250–500 mA	200 mA
Enclosure ratings	NEMA 4, 4K, 6, 6P, 12, 13, IEC IP6, IP69K7	NEMA 4, 4K, 6, 6P, 12, 13, IEC IP67	IP67, IP69K
Operating temperature	–25 to 70 °C	–25 to 70 °C	–25 to 70 °C
Indicator	360° LED	360° LED	LED
Increased shock and vibration ratings	Yes	Yes	No

For Customer Service in the U.S. call 1-877-ETN CARE (386-2273), in Canada call 1-800-268-3578. For Application Assistance in the U.S. and Canada call 1-800-426-9184.

For the most current information on this product, visit our Web site: www.eaton.com

E57 Two-Wire (AC, AC/DC, DC) Proximity Sensors

Product Selection

Stainless Steel Body (Standard Length)

	Two-Wire Sensors								
	Operating Voltage	Sensing Range (Sn)	Shielding	Connection Type $^{(1)}$	NO Output Catalog Number	NC Output Catalog Number			
12 mm	12 mm Diameter End Sensing								
	20–250 Vac	2 mm (standard range)	Shielded	2-meter cable	E57LAL12A2	E57LBL12A2			
				3-pin micro AC connector	E57LAL12A2SA 🔕	E57LBL12A2SA 🔕			
				3-pin micro AC pigtail connector	E57LAL12A2SP 🐱	E57LBL12A2SP 🔕			
		4 mm (standard range)	Unshielded	2-meter cable	E57LAL12A2E	E57LBL12A2E			
				3-pin micro AC connector	E57LAL12A2EA 🔕	E57LBL12A2EA 🔅			
				3-pin micro AC pigtail connector	E57LAL12A2EP 👀	E57LBL12A2EP 👀			
	20–132 Vac	6 mm (extended range)	Semi-shielded	2-meter cable	E57-12LE06-A	E57-12LE06-A1			
				3-pin micro AC connector	E57-12LE06-AA 😟	E57-12LE06-A1A 🔕			
				3-pin micro AC pigtail connector	E57-12LE06-AP 🕢	_			
		10 mm	Non-embeddable	2-meter cable	E57-12LE10-A	E57-12LE10-A1			
		(extended range)		3-pin micro AC connector	E57-12LE10-AA 😟	E57-12LE10-A1A 🕢			
				3-pin micro AC pigtail connector	E57-12LE10-AP 😟	E57-12LE10-A1P 🕢			
	40–250 Vac	2 mm (standard range)	Shielded	2-meter cable	E57SAL12A2	E57SBL12A2			
	50/60 Hz [@] 20–250 Vdc			3-pin micro AC connector	E57SAL12A2SA 🔕	E57SBL12A2SA 🔕			
	20-230 Vut			3-pin mini-connector	E57MAL12A2B1 🕢	_			
		4 mm (standard range)	Unshielded	2-meter cable	E57SAL12A2E	E57SBL12A2E			
				3-pin micro AC connector	E57SAL12A2EA 🔕	E57SBL12A2EA 🔕			
ım	18 mm Diameter End Sensing								
	20–250 Vac	5 mm (standard range)	Shielded	2-meter cable	E57LAL18A2	E57LBL18A2			
				3-pin micro AC connector	E57LAL18A2SA 🔕	E57LBL18A2SA 🕃			
				3-pin micro AC pigtail connector	E57LAL18A2SP 🕢	E57LBL18A2SP 🕢			
				3-pin mini-connector	E57MAL18A2B1 🕢	E57MBL18A2B1 🐼			
		8 mm (standard range)	Unshielded	2-meter cable	E57LAL18A2E	E57LBL18A2E			
				3-pin micro AC connector	E57LAL18A2EA 🙃	E57LBL18A2EA 🐼			
				3-pin micro AC pigtail connector	E57LAL18A2EP	E57LBL18A2EP 🐼			
				3-pin mini-connector	E57MAL18A2EB1 🕢	E57MBL18A2EB1 🕢			
	20–132 Vac	12 mm (extended range)	Semi-shielded	2-meter cable	E57-18LE12-A	E57-18LE12-A1			
				3-pin micro AC connector	E57-18LE12-AA 🙃	E57-18LE12-A1A 🕢			
				3-pin micro AC pigtail connector	E57-18LE12-AP 🙃	E57-18LE12-A1P (a)			
				3-pin mini-connector	E57-18LE12-AB 🐼	E57-18LE12-A1B			
		18 mm (extended range)	Non-embeddable	2-meter cable	E57-18LE20-A	E57-18LE20-A1			
				3-pin micro AC connector	E57-18LE20-AA (.)	E57-18LE20-A1A (.)			
				3-pin micro AC pigtail connector	E57-18LE20-AP 🕢	E57-18LE20-A1P 🕢			
				3-pin micro AC pigtan connector	E57-18LE20-AP 🐱	E57-18LE20-A1B 🕢			
	40. 2E0 Voc	5 mm	Shielded	2-meter cable	E57SAL18A2	E57SBL18A2			
	40_250 Vac	5 mm				LU/JULIOAZ			
	40–250 Vac 50/60 Hz®	5 mm (standard range)	Shielded						
			Unshielded	3-pin micro AC connector 2-meter cable	E57SAL18A2SA 3	E57SBL18A2SA 🕑			

Notes

See listing of compatible connector cables on Page V8-T3-40.

^① For cable lengths longer than 2 meters, add the number of the desired length in meters to the end of the listed catalog number (for catalog numbers ending with a number, add an S and then the length). Examples for a 5-meter cable: E57-18LE12-A becomes E57-18LE12-A5; E57LAL12A2 becomes E57LAL12A2S5.

⁽²⁾ Avoid wiring these AC/DC models in series as the sensors may not perform reliably. Contact Eaton's Applications Engineering at 1-800-426-9184 with questions.

E57 Two-Wire (AC, AC/DC, DC) Proximity Sensors

Stainless Steel Body (Standard Length)

	Two-Wire	Two-Wire Sensors, continued							
	Operating Voltage	Sensing Range (Sn)	Shielding	Connection Type ${}^{\rm \tiny (1)}$	NO Output Catalog Number	NC Output Catalog Number			
Angle	18 mm Dian	neter Right Angle	Sensing						
	20-250 Vac	5 mm	Shielded	2-meter cable	E57RAL18A2	E57RBL18A2			
der -				3-pin micro AC connector	E57RAL18A2SA 🐱	E57RBL18A2SA 🔕			
2				3-pin micro AC pigtail connector	E57RAL18A2SP 🔕	E57RBL18A2SP 🔕			
				3-pin mini-connector	E57RAL18A2B1 🔕	E57RBL18A2B1 🔕			
		8 mm	Unshielded	2-meter cable	E57RAL18A2E	E57RBL18A2E			
				3-pin micro AC connector	E57RAL18A2EA 🔕	E57RBL18A2EA 🔕			
				3-pin micro AC pigtail connector	E57RAL18A2EP 🔕	E57RBL18A2EP 🔕			
				3-pin mini-connector	E57RAL18A2EB1 🔕	E57RBL18A2EB1 🔕			
	30 mm Dian	neter End Sensing	9						
	20–250 Vac	10 mm (standard range) 15 mm (standard range)	Shielded	2-meter cable	E57LAL30A2	E57LBL30A2			
1				3-pin micro AC connector	E57LAL30A2SA 🔕	E57LBL30A2SA 🔕			
p.				3-pin micro AC pigtail connector	E57LAL30A2SP 🔕	E57LBL30A2SP 🔕			
				3-pin mini-connector	E57MAL30A2B1 🐼	E57MBL30A2B1 🐼			
			Unshielded	2-meter cable	E57LAL30A2E	E57LBL30A2E			
				3-pin micro AC connector	E57LAL30A2EA 🔕	E57LBL30A2EA 🔕			
				3-pin micro AC pigtail connector	E57LAL30A2EP 🔕	E57LBL30A2EP 🔕			
				3-pin mini-connector	E57MAL30A2EB1 🐱	E57MBL30A2EB1 🐱			
	20–132 Vac	22 mm	Semi-shielded	2-meter cable	E57-30LE22-A	E57-30LE22-A1			
		(extended range)		3-pin micro AC connector	E57-30LE22-AA 🔕	E57-30LE22-A1A 🔕			
				3-pin micro AC pigtail connector	E57-30LE22-AP 🔕	E57-30LE22-A1P 🔕			
				3-pin mini-connector	E57-30LE22-AB 🔕	E57-30LE22-A1B 🔕			
	40-250 Vac	10 mm	Shielded	2-meter cable	E57SAL30A2	E57SBL30A2			
	50/60 Hz [@] 20–250 Vdc	(standard range)		3-pin micro AC connector	E57SAL30A2SA 👀	E57SBL30A2SA 🕄			
	20 200 100	15 mm	Unshielded	2-meter cable	E57SAL30A2E	E57SBL30A2E			
		(standard range)		3-pin micro AC connector	E57SAL30A2EA 🗈	E57SBL30A2EA 🗈			

Notes

See listing of compatible connector cables on Page V8-T3-40.

^① For cable lengths longer than 2 meters, add the number of the desired length in meters to the end of the listed catalog number (for catalog numbers ending with a number, add an S and then the length). Examples for a 5-meter cable: E57-18LE12-A becomes E57-18LE12-A5; E57LAL12A2 becomes E57LAL12A2S5.

② Avoid wiring these AC/DC models in series as the sensors may not perform reliably. Contact Eaton's Applications Engineering at 1-800-426-9184 with questions.

E57 Two-Wire (AC, AC/DC, DC) Proximity Sensors

Stainless Steel Short Body

	Operating	Consing			NO Output	NC Output			
	Voltage	Sensing Range (Sn)	Shielding	Connection Type $^{(1)}$	Catalog Number	Catalog Number			
ım	12 mm Dia	12 mm Diameter							
	20-250 Vac	2 mm	Shielded	2-meter cable	E57SAL12A4	E57SBL12A4			
112				3-pin micro AC connector	E57SAL12A4SA 🔕	E57SBL12A4SA 🔕			
		4 mm	Unshielded	2-meter cable	E57SAL12A4E	E57SBL12A4E			
				3-pin micro AC connector	E57SAL12A4EA 🔕	E57SBL12A4EA 🔕			
	40-250 Vac	2 mm	Shielded	2-meter cable	E57SAL12A2	E57SBL12A2			
	50/60 Hz② 20–250 Vdc			3-pin micro AC connector	E57SAL12A2SA 🐱	E57SBL12A2SA 🔕			
		4 mm	Unshielded	2-meter cable	E57SAL12A2E	E57SBL12A2E			
				3-pin micro AC connector	E57SAL12A2EA 🔕	E57SBL12A2EA 🔕			
m	18 mm Dia	meter							
	20-250 Vac	5 mm	Shielded	2-meter cable	E57SAL18A4	E57SBL18A4			
4 100	69			3-pin micro AC connector	E57SAL18A4SA 🔕	E57SBL18A4SA 🔕			
11-		8 mm	Unshielded	2-meter cable	E57SAL18A4E	E57SBL18A4E			
				3-pin micro AC connector	E57SAL18A4EA 🔕	E57SBL18A4EA 🔕			
	40-250 Vac	5 mm	Shielded	2-meter cable	E57SAL18A2	E57SBL18A2			
	50/60 Hz② 20–250 Vdc			3-pin micro AC connector	E57SAL18A2SA 🐱	E57SBL18A2SA 🔕			
		8 mm	Unshielded	2-meter cable	E57SAL18A2E	E57SBL18A2E			
				3-pin micro AC connector	E57SAL18A2EA 🔕	E57SBL18A2EA 🔕			
m	30 mm Dia	meter							
Ale	20–250 Vac	10 mm	Shielded	2-meter cable	E57SAL30A4	E57SBL30A4			
				3-pin micro AC connector	E57SAL30A4SA 🔕	E57SBL30A4SA 🔕			
DY		15 mm	Unshielded	2-meter cable	E57SAL30A4E	E57SBL30A4E			
				3-pin micro AC connector	E57SAL30A4EA 🐱	E57SBL30A4EA 🔕			
	40-250 Vac	10 mm	Shielded	2-meter cable	E57SAL30A2	E57SBL30A2			
	50/60 Hz② 20–250 Vdc			3-pin micro AC connector	E57SAL30A2SA 🐱	E57SBL30A2SA 🕹			
		15 mm	Unshielded	2-meter cable	E57SAL30A2E	E57SBL30A2E			
				3-pin micro AC connector	E57SAL30A2EA	E57SBL30A2EA 🔝			

Notes

See listing of compatible connector cables on Page V8-T3-40.

^① Cable models are supplied as standard with a 2-meter cable. A 5-meter cable is available by adding S5 to the catalog number. Example: E57SAL12T110 becomes E57SAL12T110S5.

③ Avoid wiring these AC/DC models in series as the sensors may not perform reliably. Contact Eaton's Applications Engineering at 1-800-426-9184 with questions.

E57 Two-Wire (AC, AC/DC, DC) Proximity Sensors

Nickel-Brass Body

	Two-Wire Sensors							
	Operating Voltage	Sensing Range	Shielding	Output Type	Connection Type	NO Output Catalog Number	NC Output Catalog Number	
	– 12 mm Diameter							
- Mire	20–250 Vac	2 mm	Shielded	_	2-meter cable	E57-12GS02-A	E57-12GS02-A1	
EF					3-pin micro AC connector	E57-12GS02-AAB 🔕	E57-12GS02-A1AB 🔕	
2		4 mm	Unshielded		2-meter cable	E57-12GU04-A	E57-12GU04-A1	
					3-pin micro AC connector	E57-12GU04-AAB 🔕	E57-12GU04-A1AB 🔅	
	10-30 Vdc	2 mm	Shielded	NPN/PNP	2-meter cable	E57-12GS02-D	E57-12GS02-D1	
					4-pin micro DC connector	E57-12GS02-DDB 🏽	E57-12GS02-D1DB 🕄	
		4 mm	Unshielded	NPN/PNP	2-meter cable	E57-12GU04-D	E57-12GU04-D1	
					4-pin micro DC connector	E57-12GU04-DDB 🕄	E57-12GU04-D1DB 🙂	
		8 mm		NPN/PNP	2-meter cable	E57-12GE08-D	E57-12GE08-D1	
		(extended range	2)		4-pin micro DC connector	E57-12GE08-DDB 🙂	E57-12GE08-D1DB 🏽	
	18 mm Diai	neter						
	20–250 Vac	5 mm	Shielded	_	2-meter cable	E57-18GS05-A	E57-18GS05-A1	
					3-pin micro AC connector	E57-18GS05-AAB 🕢	E57-18GS05-A1AB 📀	
DED		8 mm	Unshielded	_	2-meter cable	E57-18GU08-A	E57-18GU08-A1	
5					3-pin micro AC connector	E57-18GU08-AAB 🔕	E57-18GU08-A1AB 🔕	
		16 mm			3-pin micro AC connector	E57-18GE16-AAB 🔕	E57-18GE16-A1AB 📀	
	10-30 Vdc	5 mm	Shielded	NPN/PNP	2-meter cable	E57-18GS05-D	E57-18GS05-D1	
					4-pin micro DC connector	E57-18GS05-DDB 🙂	E57-18GS05-D1DB 🙁	
		8 mm	Unshielded	NPN/PNP	2-meter cable	E57-18GU08-D	E57-18GU08-D1	
					4-pin micro DC connector	E57-18GU08-DDB 🕃	E57-18GU08-D1DB 🏽	
		16 mm		NPN/PNP	2-meter cable	E57-18GE16-D	E57-18GE16-D1	
		(extended range	2)		4-pin micro DC connector	E57-18GE16-DDB 🙂	E57-18GE16-D1DB 🏽	
	30 mm Diai	neter						
	20–250 Vac	10 mm	Shielded	_	2-meter cable	E57-30GS10-A	E57-30GS10-A1	
					3-pin micro AC connector	E57-30GS10-AAB 🕢	E57-30GS10-A1AB 🔕	
20		15 mm	Unshielded	_	2-meter cable	E57-30GU15-A	E57-30GU15-A1	
					3-pin micro AC connector	E57-30GU15-AAB 🔕	E57-30GU15-A1AB 🕃	
	10-30 Vdc	10 mm	Shielded	NPN/PNP	2-meter cable	E57-30GS10-D	E57-30GS10-D1	
					4-pin micro DC connector	E57-30GS10-DDB 🏽	E57-30GS10-D1DB 🏶	
		15 mm	Unshielded	NPN/PNP	2-meter cable	E57-30GU15-D	E57-30GU15-D1	
				·	4-pin micro DC connector	E57-30GU15-DDB 🔅	E57-30GU15-D1DB 🔃	
		25 mm		NPN/PNP	2-meter cable	E57-30GE25-D	E57-30GE25-D1	
		(extended range	e)		4-pin micro DC connector	E57-30GE25-DDB (#)	E57-30GE25-D1DB 🕄	

Note

: See listing of compatible connector cables on Page V8-T3-40.

E57 Two-Wire (AC, AC/DC, DC) Proximity Sensors

Compatible Connector Cables

Micro-Style Straight Female

	Voltage Style	Number of Pins	Gauge	Length	Pin Configuration/Wire Colors (Face View Female Shown)	PVC Jacket Catalog Number	PUR Jacket Catalog Number	
	Micro-Style	, Straight Fema	ale					
ale	AC	3-pin, 3-wire	22 AWG	6.0 ft (2m)	2 3 1-Green 2-Red/Black 3-Red/White	CSAS3F3CY2202	CSAS3F3RY2202	

Accessories

Description	Reference
Mounting brackets	See Tab 8, section 8.2
Replacement mounting nuts and other accessories	See Tab 8, section 8.3
Connector cables	See Tab 10, section 10.1

E57 Two-Wire Proximity Sensors

Standard Cables ^①

Note

 $^{\textcircled{}}$ For a full selection of connector cables, see Tab 10, section 10.1.

Technical Data and Specifications

Stainless Steel Body

	Two-Wire AC/DC Sensors	
Two-Wire AC Sensors	AC Operation	DC Operation
40–250 Vac	40–250 Vac	20250 Vdc
250 mA	200 mA	200 mA
20 Hz	60 Hz	60 Hz
1.7 mA maximum at 70 °C	1.7V mA maximum at 120 Vac	≤2.0 mA
7V maximum	≤4 V at >25 mA	12 V at <10 mA
5 mA minimum	5 mA minimum	5 mA maximum
_	Resettable short circuit; overload protection	Resettable short circuit; overload protection
2-20% of rated sensing distance	2–20% of rated sensing distance	2-20% of rated sensing distance
<3% sensing distance	<3% sensing distance	<3% sensing distance
360° viewable LED	360° viewable LED	360° viewable LED
–13 to 158 °F (–25 to 70 °C) ^①	–13 to 158 °F (–25 to 70 °C) $^{\odot}$	–13 to 158 °F (–25 to 70 °C) ①
NEMA 4, 4X, 6, 6P, 12 and 13 (IP67)	NEMA 4, 4X, 6, 6P, 12 and 13 (IP67)	NEMA 4, 4X, 6, 6P, 12 and 13 (IP67)
30 g sine wave, 11 ms per IEC68-2-76	30 g sine wave, 11 ms per IEC68-2-76	30 g sine wave, 11 ms per IEC68-2-76
10 to 55 Hz, 1 mm amplitude	10 to 55 Hz, 1 mm amplitude	10 to 55 Hz, 1 mm amplitude
Stainless steel, polycarbonate end bells, Ryton® front cap	Stainless steel, polycarbonate end bells, Ryton® front cap	Stainless steel, polycarbonate end bells, Ryton® front cap
AWM Style 20387 (PVC)	AWM Style 20387 (PVC)	AWM Style 20387 (PVC)
	40–250 Vac 250 mA 20 Hz 1.7 mA maximum at 70 °C 7V maximum 5 mA minimum	Two-Wire AC SensorsAC Operation40-250 Vac40-250 Vac250 mA200 mA20 Hz60 Hz1.7 mA maximum at 70 °C1.7V mA maximum at 120 Vac7V maximum<4 V at >25 mA5 mA minimum5 mA minimumResettable short circuit; overload protection2-20% of rated sensing distance2-20% of rated sensing distance<3% sensing distance

Notes

Ryton[®] is a registered trademark of Phillips Chemical (division of Phillips Petroleum).

 $^{\odot}$ 240 Vac operation is limited to less than 122 °F (50 °C) in two-wire AC/DC models.

E57 Two-Wire (AC, AC/DC, DC) Proximity Sensors


Nickel-Brass Body

Description	Two-Wire AC Sensors	Two-Wire DC Sensors		
Operating voltage	20–250 Vac	10–30 Vdc		
OFF-state leakage	<1.8 mA	<0.8 mA		
Maximum load current	200 mA	100 mA		
Minimum load current	5 mA	3 mA		
Surge current	5 A (20 ms)			
Voltage drop	<8 Vac at 400 mA	<6 V		
Switching frequency				
8 mm diameter	_	_		
12 mm diameter	25 Hz	1 kHz (shielded); 1 kHz (unshielded)		
18 mm diameter	25 Hz	1 kHz (shielded); 500 Hz (unshielded)		
30 mm diameter	25 Hz	500 Hz (shielded); 200 Hz (unshielded)		
Short-circuit protection	No	Yes		
Overload trip point	_	>120 mA		
Time delay before availability	_	_		
Transient protection	_	2 kV, 1 ms, 1 kohm		
Repeat accuracy	Shielded: <1.0%/Unshielded: <3.0% (Sr)	<2.0% (Sr)		
Switching hysteresis	<15%	<15%		
Operating temperature	–13 to 158 °F (-25 to 70 °C) (32 to 140 °F [0 to 60 °C] for all extended range models)	–13 to 158 °F (–25 to 70 °C) (32 to 140 °F [0 to 60 °C] for all extended range models)		
Temperature drift	<10% (Sr)	<10% (Sr)		
Protection	IP67, IP69K	IP67, IP69K		
Housing material	Nickel plated brass (stainless steel for 8 mm diameter, nano-connector models)	Nickel plated brass (stainless steel for 8 mm diameter, nano-connector models)		
Cable	PVC jacket, 2-meter length	PVC jacket, 2-meter length		

Recommended Mounting Clearances

For unshielded standard range sensors and extended range sensors, clearance must be provided around the sensor when mounting for reliable performance. ("Sn" is the sensing range of the sensor, "d" is the sensor diameter.)

E57 Premium Sensors, Mounting

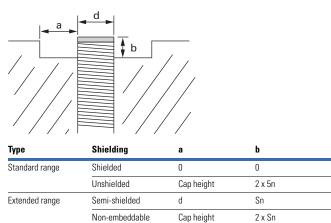

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.

Stainless Steel Body

Operating Voltage	Output	Cable Models	Connector Models (Face View Male Sh Micro	own) Mini
Two-Wire Sensors	S			
20–250 Vac/dc and AC-only AC wiring example	NO and NC	BN L1 BU Load L2	L2 Load (3 (2) L1	L1 (1) 2 3 Load L2
20—250 Vac/dc DC wiring example	NO and NC (NPN)	BN Load L1 or +V BU L2 or (-)	L2-Load 3 2 L1	_
	NO and NC (PNP)	BN L1 or +V BU Load L2 or (-)	L2 3 2Laad L1	_

E57 Two-Wire (AC, AC/DC, DC) Proximity Sensors

Nickel-Brass Body

Operating Voltage	Output	Cable Models	Connector Models (Face View Male Shown) Micro
Two-Wire Sensors	;		
20–250 Vac	NO	BN L1 BU Load L2 Yellow/Green \$\forall * * Intenally connected to housing (use of this wire is optional)	L2-Load 3 2 1 * Internally connected to housin (use of this wire is optional)
10–30 Vdc	NO (NPN)	BU (-)	(-) (2) (1) Load (+V)
	NO (PNP)	BN +V BU Load (-)	(-) Load 3 4 (+V)


E57 Two-Wire (AC, AC/DC, DC) Proximity Sensors

Dimensions


Approximate Dimensions in Inches (mm)

Stainless Steel Body (Standard Length) 12

Cable Models



Connector Models



Size	Shielding	Overall Length A	Threaded Length B	Cap Height C	Nut Width D	Thread Size E
Two-Wire AC	Sensors—Cable Models					
12 mm	Shielded	2.46 (62.4)	1.98 (50.3)	_	0.67 (16.8)	M12 x 1
	Semi-shielded	2.87 (72.8)	2.28 (57.9)	0.06 (1.62)	0.67 (16.8)	M12 x 1
	Unshielded	2.87 (72.7)	1.98 (50.3)	0.36 (9.14)	0.67 (16.8)	M12 x 1
18 mm	Shielded	2.54 (64.5)	2.00 (50.9)	_	0.94 (23.8)	M18 x 1
	Semi-shielded	2.60 (66.1)	1.90 (48.2)	0.10 (2.54)	0.94 (23.8)	M18 x 1
	Unshielded	2.60 (66.0)	1.47 (37.2)	0.56 (14.1)	0.94 (23.8)	M18 x 1
30 mm	Shielded	2.73 (69.3)	1.98 (50.3)	_	1.41 (35.9)	M30 x 1.5
	Semi-shielded	2.67 (67.8)	1.90 (48.2)	0.13 (3.30)	1.41 (35.9)	M30 x 1.5
	Unshielded	2.73 (69.3)	1.49 (37.8)	0.52 (13.26)	1.41 (35.9)	M30 x 1.5
Two-Wire AC	Sensors-Micro-Connec	tor Models				
12 mm	Shielded	2.69 (68.4)	1.98 (50.3)	_	0.67 (16.8)	M12 x 1
	Semi-shielded	3.04 (77.2)	2.28 (57.9)	0.06 (1.62)	0.67 (16.8)	M12 x 1
	Unshielded	3.06 (77.7)	1.98 (50.3)	0.36 (9.14)	0.36 (9.14)	M12 x 1
18 mm	Shielded	2.72 (69.06)	2.00 (50.9)	_	0.94 (23.8)	M18 x 1
	Semi-shielded	2.72 (69.1)	1.90 (48.2)	0.10 (2.54)	0.94 (23.8)	M18 x 1
	Unshielded	2.74 (69.4)	1.47 (37.2)	0.56 (14.1)	0.94 (23.8)	M18 x 1
30 mm	Shielded	2.91 (73.8)	1.98 (50.3)	_	1.41 (35.9)	M30 x 1.5
	Semi-shielded	2.78 (70.6)	1.90 (48.2)	0.13 (3.30)	1.41 (35.9)	M30 x 1.5
	Unshielded	2.91 (73.8)	1.49 (37.8)	0.52 (13.26)	1.41 (35.9)	M30 x 1.5

Notes


① These dimensions apply to the Premium+ Series models in this section. Not indicated Premium Series models.

⁽²⁾ For short body model dimensions (E57SAL ...) refer to Page V8-T3-24.


Approximate Dimensions in Inches (mm)

Stainless Steel Body (Standard Length) 02

Cable Models, continued



Connector Models, continued



Size	Shielding	Overall Length A	Threaded Length B	Cap Height C	Nut Width D	Thread Size E
Two-Wire AC/	DC Sensors—Cable Mod	lels				
12 mm	Shielded	2.45 (62.4)	1.98 (50.3)	_	0.67 (16.8)	M12 x 1
	Unshielded	2.45 (62.4)	1.80 (45.8)	0.20 (5)	0.67 (16.8)	M12 x 1
18 mm	Shielded	2.54 (64.5)	2.00 (50.9)	_	0.94 (23.8)	M18 x 1
	Unshielded	2.54 (64.5)	1.75 (44.4)	0.28 (7)	0.94 (23.8)	M18 x 1
10 mm	Shielded	2.72 (69.3)	2.12 (53.8)	_	1.41 (35.9)	M30 x 1.5
	Unshielded	2.72 (69.3)	1.63 (41.4)	0.52 (13.26)	1.41 (35.9)	M30 x 1.5
wo-Wire AC/	DC Sensors-Micro-Con	nector Models				
2 mm	Shielded	2.69 (68.4)	1.98 (50.3)	_	0.67 (16.8)	M12 x 1
	Unshielded	2.69 (68.4)	1.80 (45.8)	0.20 (5)	0.67 (16.8)	M12 x 1
8 mm	Shielded	2.72 (69.06)	2.00 (50.9)	_	0.94 (23.8)	M18 x 1
	Unshielded	2.72 (69.06)	1.75 (44.4)	0.28 (7)	0.94 (23.8)	M18 x 1
0 mm	Shielded	2.91 (73.8)	1.98 (50.3)	_	1.41 (35.9)	M30 x 1.5
	Unshielded	2.91 (73.8)	1.49 (37.8)	0.52 (13.26)	1.41 (35.9)	M30 x 1.5
wo-Wire AC	Sensors-Mini-Connecto	or Models				
8 mm	Shielded	3.39 (86.1)	2.00 (50.8)	0.02 (0.5)	0.94 (23.8)	M18 x 1
	Semi-shielded	3.39 (86.0)	1.90 (48.2)	0.10 (2.54)	0.94 (23.8)	M18 x 1
	Unshielded	3.39 (86.1)	1.46 (37.0)	0.57 (14.5)	0.94 (23.8)	M18 x 1
30 mm	Shielded	3.39 (86.1)	2.1 (53.3)	0.03 (0.8)	1.41 (35.9)	M30 x 1.5
	Semi-shielded	3.44 (87.4)	1.90 (48.2)	0.13 (3.30)	1.41 (35.9)	M30 x 1.5
	Unshielded	3.39 (86.1)	1.55 (39.4)	0.55 (14.0)	1.41 (35.9)	M30 x 1.5

Notes

① These dimensions apply to the Premium+ Series models in this section. Not indicated Premium Series models.


@ For short body model dimensions (E57SAL \ldots) refer to $\mbox{Page V8-T3-24}.$


3


E57 Two-Wire (AC, AC/DC, DC) Proximity Sensors

Approximate Dimensions in Inches (mm)

Stainless Steel Short Body (Cable Connector Models)










Size	Shielding	Overall Length A	Threaded Length B	Cap Height C	Thread Size D
Two-Wire AC	Sensors				
12 mm	Shielded	2.04 (51.7)	1.56 (39.6)	0.02 (0.5)	M12 x 1
	Unshielded	2.04 (51.7)	1.38 (35.1)	0.20 (5)	M12 x 1
18 mm	Shielded	1.39 (35.3)	0.86 (21.82)	0.02 (0.5)	M18 x 1
	Unshielded	1.39 (35.3)	0.60 (15.32)	0.28 (7)	M18 x 1
30 mm	Shielded	1.58 (40.2)	0.99 (25.15)	0.03 (0.8)	M30 x 1.5
	Unshielded	1.77 (44.9)	0.68 (17.27)	0.52 (13.26)	M30 x 1.5
Two-Wire AC	DC Sensors				
12 mm	Shielded	2.46 (62.4)	1.98 (50.27)	—	M12 x 1
	Unshielded	2.46 (62.4)	1.80 (45.77)	0.20 (5)	M12 x 1
18 mm	Shielded	2.54 (64.5)	2.00 (50.9)	_	M18 x 1
	Unshielded	2.54 (64.5)	1.75 (44.4)	0.28 (7)	M18 x 1
30 mm	Shielded	2.72 (69.3)	2.12 (53.8)	_	M30 x 1.5
	Unshielded	2.72 (69.3)	1.63 (41.4)	0.52 (13.26)	M30 x 1.5

Stainless Steel Short Body (Micro-Connector Models)







Size	Shielding	Overall Length A	Threaded Length B	Cap Height C	Thread Size D	
Two-Wire AC	Sensors					
12 mm	Shielded	2.27 (57.8)	1.56 (39.6)	0.02 (0.5)	M12 x 1	
	Unshielded	2.27 (57.8)	1.38 (35.1)	0.20 (5)	M12 x 1	
18 mm	Shielded	1.57 (40.0)	0.86 (21.82)	0.02 (0.5)	M18 x 1	
	Unshielded	1.57 (40.0)	0.60 (15.32)	0.28 (7)	M18 x 1	
30 mm	Shielded	1.76 (44.8)	0.99 (25.15)	0.03 (0.8)	M30 x 1.5	
	Unshielded	1.95 (49.5)	0.68 (17.27)	0.52 (13.26)	M30 x 1.5	
Two-Wire AC	/DC Sensors					
12 mm	Shielded	2.69 (68.4)	1.98 (50.27)	_	M12 x 1	
	Unshielded	2.69 (68.4)	1.80 (45.77)	0.20 (5)	M12 x 1	
18 mm	Shielded	2.72 (69.06)	2.00 (50.9)	_	M18 x 1	
	Unshielded	2.72 (69.06)	1.75 (44.4)	0.28 (7)	M18 x 1	
30 mm	Shielded	2.91 (73.8)	2.12 (53.8)	_	M30 x 1.5	
	Unshielded	2.91 (73.8)	1.63 (41.4)	0.52 (13.26)	M30 x 1.5	


E57 Two-Wire (AC, AC/DC, DC) Proximity Sensors

Approximate Dimensions in mm

Nickel-Brass Body

Cable Models


Two-Wire Sensors



Catalog Number	Operating Voltage	A	в	C	D	E	
E57-12GS02-A	20–250 Vac	M12x1	65	15	50		
E57-12GU04-A		M12x1	60	15	42	8	_
E57-18GS05-A		M18x1	80	20	60	_	_
E57-18GU08-A		M18x1	80	20	48	12	
E57-30GS10-A		M30x1.5	80	20	60	_	
E57-30GU15-A		M30x1.5	80	20	45	15	
E57-12GS02-D	10-30 Vdc	M12x1	50	_	50	_	
E57-12GU04-D		M12x1	50	_	42	8	
E57-12GE08-D		M12x1	50	_	42	8	
E57-12GE08-D1		M12x1	50	_	42	8	
E57-18GS05-D		M18x1	55	5	50	_	
E57-18GU08-D		M18x1	55	5	38	12	
E57-18GE16-D		M18x1	55	5	38	12	
E57-18GE16-D1		M18x1	55	5	38	12	
E57-30GS10-D		M30x1.5	55	5	50	_	
E57-30GU15-D		M30x1.5	55	5	35	15	
E57-30GE25-D		M30x1.5	55	5	35	15	
E57-30GE25-D1		M30x1.5	55	5	35	15	

Connector Models

Two-Wire Sensors



Catalog Number ^①	Operating Voltage	A	В	C	D	E
E57-12GS02-AAB	20–250 Vac	M12x1	68	16	42	_
E57-12GU04-AAB		M12x1	68	16	34	8
E57-18GS05-AAB	_	M18x1	91	20	60	_
E57-18GU08-AAB		M18x1	91	20	48	12
E57-18GE16-AAB		M18x1	79.2	15	37	11.5
E57-30GS10-AAB		M30x1.5	80	20	60	_
E57-30GU15-AAB		M30x1.5	91	20	45	15
E57-12GS02-DDB	10-30 Vdc	M12x1	69	16	42	_
E57-12GU04-DDB		M12x1	68	16	34	8
E57-12GE08-DDB		M12x1	68	10	50	8
E57-12GE08-D1DB		M12x1	68	10	50	8
E57-18GS05-DDB		M18x1	76	15	61	_
E57-18GU08-DDB		M18x1	80	15	49	12
E57-18GE16-DDB		M18x1	79	15	52	12
E57-30GS10-DDB		M30x1.5	75	15	60	_
E57-30GU15-DDB		M30x1.5	79	15	45	15
E57-30GE25-DDB		M30x1.5	78	15	48	15

Note

 $^{\odot}\;$ Normally closed models are dimensionally indicated to equivalent normally open models.

3

AccuProx Analog Sensors

Application Guide

Technical Data and Specifications

Wiring Diagrams

Dimensions

 Page

V8-T3-50

V8-T3-51

V8-T3-51

V8-T3-52

V8-T3-54

V8-T3-54

AccuProx Analog Sensors



AccuProx Analog Sensors

Product Description

The AccuProx from Eaton's Electrical Sector is a high performance analog inductive proximity sensor. The AccuProx family of analog sensors provide unmatched sensing range, linearity and resolution in an affordable and compact tubular package.

Unlike standard inductive sensors, which send an open or close signal upon target presence or absence, AccuProx analog sensors provide an electrical signal that varies in proportion to the position of the metal target within its sensing range. This makes AccuProx ideal for applications requiring precise position sensing and measurement.

The sensing performance of AccuProx sets it apart from traditional analog inductive designs. Utilizing components from the cuttingedge iProx family, AccuProx provides sensing ranges of three to four times that of typical tubular analog inductive sensors—all without compromising accuracy. Unlike many competitive products, which are often hampered by an "S-shaped" output curve, AccuProx outputs are linear.

AccuProx has the range and precision to solve your most difficult measurement applications.

Application Description

Typical Applications

- Part positioningDistance, size and
- Distance, size and thickness measurement
- General inspection and error proofing, such as material imperfection or blemish detection
- Eccentricity or absolute angle detection
- Identification of different metals

See the Application Guide on **Page V8-T3-50** for more detail.

Features

Contents

Description

AccuProx Analog Sensors

Product Selection

- Extended linear sensing range of up to 25 millimeters—three times longer than standard tubular analog inductive sensors
- Outputs available in current (4–20 or 0–20 mA) and voltage (0–10 V)
- High output resolution and repeatability for applications requiring precision sensing performance
- Robust stainless steel barrel, shock-resistant front cap, polycarbonate end bell and impactabsorbing potting compound
- Ideal for extreme temperature or high pressure washdown environments
- High noise immunity of 20 V/m prevents many problems associated with electrical noise

Standards and Certifications

• cUL Listed

• CE



DANGER

THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

For the most current information on this product, visit our Web site: www.eaton.com For Customer Service in the U.S. call 1-877-ETN CARE (386-2273), in Canada call 1-800-268-3578. For Application Assistance in the U.S. and Canada call 1-800-426-9184.

Application Guide

Presenting AccuProx— Unmatched Analog Range in a Proven Package

Historically, analog sensors have been limited by very short sensing ranges—as little as one or two millimeters. By utilizing technology first perfected in the iProx family of digital inductive sensors, AccuProx can sense objects as far as 25 millimeters. This extended range can be achieved without making compromises often found in competitive products, such as reduced output accuracy.

AccuProx utilizes many of the proven materials found in other tubular sensor families. The threaded barrel and included mounting nuts are made of stainless steel, which exhibits superior corrosion and abrasion resistance versus nickelplated brass. AccuProx also features a proprietary internal potting compound that absorbs impacts and vibration while sealing out moisture. The materials used in the construction of AccuProx are time-tested and proven to work.

High Output Accuracy

Analog inductive sensors are often used in applications that require a higher level of precision than a standard digital sensor. For example, applications such as part inspection require a sensor that can detect very small variances. AccuProx has been designed with these applications in mind.


Output accuracy is determined by the repeat accuracy, linearity, resolution and response time of the sensor.

Repeat accuracy refers to the variations in sensing distance between successive sensor operations due to component tolerances, where all operating conditions are kept the same. The repeat accuracy of an 18 millimeter, unshielded AccuProx sensor is less than 20 micrometers. See the chart below for a repeat accuracy comparison of AccuProx versus the competition.



Repeat Accuracy (Less is Better)


Linearity refers to the shape of the output curve. Many competitive analog sensors exhibit a wavy or "S-shaped" output curve. This means that a change in target distance may not always translate into an equivalent change in output, particularly at the innermost and outermost ranges of a non-linear analog sensor. AccuProx features a linear output. See the diagram below for an example of AccuProx versus a non-linear competitive offering.



Resolution refers to the number of "steps" in the sensor output. A higher resolution is ideal because it will allow the sensor to detect smaller changes in target position.

An 18 millimeter, unshielded AccuProx features more than 350 output steps, ensuring consistent performance.


Typical Analog Applications Material Imperfection or Blemish Detection



Eccentricity or Absolute Angle Detection



Saw Blade Deflection



3

AccuProx Analog Sensors

Inductive Proximity Sensors

Product Selection

AccuProx Analog Sensors

Three-	Four-Wire S	ensors			
Operating Voltage	Sensing Range ⁽¹⁾	Shielding	Connection Type	Current (0–20 mA) and Voltage (0–10 V) Output ® Catalog Number	Current (4– 20 mA) Output Only [@] Catalog Number
12 mm D	iameter				
15-30 Vdc	0.5–4 mm	Shielded	4-pin micro DC connector	E59-A12A104D01-CV 🙂	E59-A12A104D01-C1 🙂
			4-pin micro DC pigtail	E59-A12A104D01P-CV 🙂	E59-A12A104D01P-C1 🕃
			2-meter cable	E59-A12A104C02-CV	E59-A12A104C02-C1
	1–8 mm	Unshielded	4-pin micro DC connector	E59-A12C108D01-CV 🙂	E59-A12C108D01-C1 🔅
			4-pin micro DC pigtail	E59-A12C108D01P-CV 🕄	E59-A12C108D01P-C1
			2-meter cable	E59-A12C108C02-CV	E59-A12C108C02-C1
18 mm D	iameter				
15-30 Vdc	1–7 mm	Shielded	4-pin micro DC connector	E59-A18A107D01-CV 🙂	E59-A18A107D01-C1 🔅
P			4-pin micro DC pigtail	E59-A18A107D01P-CV 🏽	E59-A18A107D01P-C1
)			2-meter cable	E59-A18A107C02-CV	E59-A18A107C02-C1
	1–15 mm	Unshielded	4-pin micro DC connector	E59-A18C115D01-CV 🏽	E59-A18C115D01-C1 🏽
			4-pin micro DC pigtail	E59-A18C115D01P-CV 🏽	E59-A18C115D01P-C1 🏽
			2-meter cable	E59-A18C115C02-CV	E59-A18C115C02-C1
30 mm D	iameter				
15–30 Vdc	1–12 mm	Shielded	4-pin micro DC connector	E59-A30A112D01-CV 🕄	E59-A30A112D01-C1 🔅
P			4-pin micro DC pigtail	E59-A30A112D01P-CV 🕄	E59-A30A112D01P-C1 🕃
6			2-meter cable	E59-A30A112C02-CV	E59-A30A112C02-C1
	1–25 mm	Unshielded	4-pin micro DC connector	E59-A30C125D01-CV 🏵	E59-A30C125D01-C1 🖲
			4-pin micro DC pigtail	E59-A30C125D01P-CV 🏵	E59-A30C125D01P-C1 @
			2-meter cable	E59-A30C125C02-CV	E59-A30C125C02-C1

Compatible Connector Cables

	Standar	d Cables ③					
	Voltage Style	Number of Pins	Gauge	Length	Pin Configuration/Wire Colors (Face View Female Shown)	PVC Jacket Catalog Number	PUR Jacket Catalog Number
licro-Style	Micro-Sty	le, Straight Fen	nale				
Straight Female	DC	4-pin, 3-wire	22 AWG	6.0 ft (2m)	1-Brown 2-No Wire 3-Blue 4-Black	CSDS4A3CY2202	CSDS4A3RY2202
	DC	4-pin, 4-wire	22 AWG	6.0 ft (2m)	1-Brown 2-White 3-Blue 4-Black	CSDS4A4CY2202	CSDS4A4RY2202

Notes

 $\textcircled{\begin{tabular}{ll} \textcircled{\begin{tabular}{ll} \hline \hline \\ \hline \end{array}}$ See listing of compatible connector cables above.

① Published range data is based on a 1 mm thick square target made of Type FE 360 steel per ISO Standard 630.

^② Models available in custom output configurations (for example, 1–5 V, 0–5 V). Contact factory for details.

⁽³⁾ For a full selection of connector cables, see Tab 10, section 10.1.

3

Technical Data and Specifications

AccuProx Analog Sensors

Description	12 mm Models Shielded	Unshielded	18 mm Models Shielded	Unshielded	30 mm Models Shielded	Unshielded
Performance						
Analog operating range 1	0.5–4 mm	1—8 mm	1–7 mm	1–15 mm	1–12 mm	1–25 mm
Temperature range	–40 to 158 °F (–40 to 70 °C)	–40 to 158 °F (–40 to 70 °C)				
Temperature drift	<± 10%	<±10%	<± 10%	<± 10%	<± 10%	<± 10%
Conformity	<± 10%	<±10%	<± 10%	<± 10%	<± 10%	<± 10%
Repeat accuracy	<25 µm ⁽²⁾	<20 µm ⁽²⁾	<40 µm ⁽²⁾	<20 µm [@]	<50 µm [©]	<30 µm @
Minimum repeat accuracy	<3.0% at max. range	<1.1% at max. range	<2.2% at max. range	<1.2% at max. range	<1.2% at max. range	<0.8% at max. range
Recovery time	<1.0 ms	<1.1 ms	<1.5 ms	<2.0 ms	<2.0 ms	<3.0 ms
Response time	200 Hz	100 Hz	200 Hz	100 Hz	140 Hz	100 Hz
Linearity tolerance	<± 1.0% of full scale	$<\pm$ 1.0% of full scale	$<\pm$ 1.0% of full scale	<± 1.0% of full scale	<± 1.0% of full scale	<± 1.0% of full scale
Resolution	23 µm max.	16 µm max.	40 µm max.	21 µm max.	50 µm max.	30 µm max.
Electrical						
Style	AccuProx Analog, three-/four-wire DC	AccuProx Analog, three-/four-wire DC				
Operating voltage	15–30 Vdc	15–30 Vdc				
Current output signal	0–20 mA or 4–20 mA by model	0–20 mA or 4–20 mA by model				
Current output load resistance	400–500 ohms	400–500 ohms	400–500 ohms	400–500 ohms	400-500 ohms	400-500 ohms
Current output ripple content	± 40 μA max.	± 40 µA max.				
Current output minimum change	30 µA	20 µA	50 µA	28 µA	66 µA	40 µA
Voltage output signal ③	0–10 V	0–10 V				
Voltage output load resistance	4.7–5.0 kohm (2.5 mA max.)	4.7–5.0 kohm (2.5 mA max.)				
Voltage output ripple content	± 10 mV max.	± 10 mV max.				
Voltage output minimum change	15 mV	10 mV	25 mV	14 mV	33 mV	20 mV
Burden current	<20 mA	<20 mA				
Output LED	Dual-color, 360° viewable	Dual-color, 360º viewable	Dual-color, 360° viewable	Dual-color, 360° viewable	Dual-color, 360° viewable	Dual-color, 360° viewable
Short-circuit protection	Incorporated ④	Incorporated ④				
Wire breakage protection	Incorporated	Incorporated	Incorporated	Incorporated	Incorporated	Incorporated
Reverse polarity protection	Incorporated	Incorporated	Incorporated	Incorporated	Incorporated	Incorporated
Physical						
Size			See Dimensions	on Page V8-T3-54 .		
Enclosure protection	NEMA 4, 4X, 6, 6P, 13	NEMA 4, 4X, 6, 6P, 13				
Shock	30 g half-sine at 11 ms	30 g half-sine at 11 m				
Vibration	10–55 Hz, 1 mm amplitude	10–55 Hz, 1 mm amplitude				
Housing material	Stainless steel, polycarbonate end bell, polyphenylene sulfide front cap	Stainless steel, polycarbonate end be polyphenylene sulfide front cap				
Termination	Micro-connector, potted cable, 2m; Pigtail	Micro-connector, potted cable, 2m; Pigtail	Micro-connector, potted cable, 2m; Pigtail	Micro-connector, potted cable, 2m; Pigtail	Micro-connector, potted cable, 2m; Piotail	Micro-connector, potted cable, 2m; Pigtail

Pigtail,

micro-connector, 2m

Pigtail,

micro-connector, 2m

Pigtail,

micro-connector, 2m

Pigtail,

micro-connector, 2m

① Published range data is based on a 1 mm thick square target made of Type FE 360 steel per ISO Standard 630.

Pigtail,

micro-connector, 2m

O The sensor achieves its maximum repeat accuracy after warming up for a period of at least one hour.

③ Voltage outputs available on models ending in -CV.

(a) Continuous short-circuits can exceed power dissipation ratings and cause eventual destruction.

micro-connector, 2m


Pigtail,


AccuProx Analog Sensors


Inductive Proximity Sensors

AccuProx Analog Performance Graphs

Linear Output

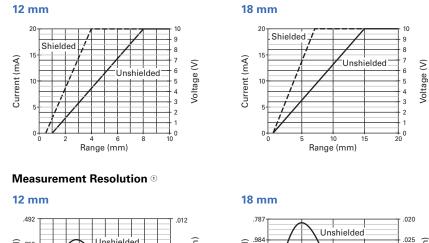









Output Resolution ²

12 mm














Notes

^① Measurement resolution is the sensor's ability to detect a change in target position. The measurement resolution is the finest at the highest point in the curve.


^③ Output resolution is the change in output signal relative to target position. The minimum change in output resolution is defined by the lowest point in the curve.

AccuProx Analog Sensors

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.


AccuProx Analog Sensors

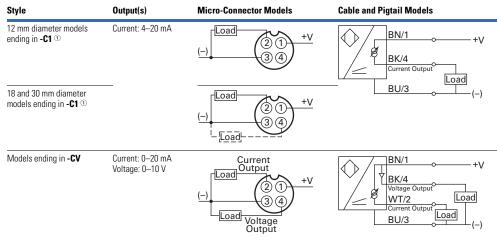

Dimensions


Approximate Dimensions in Inches (mm)

Micro-Connector Models





Cable and Pigtail Models



Size	Shielding	Α	В	C	D
12 mm	Shielded	3.05 (77.5)	1.98 (50.3)	0.02 (0.50)	0.67 (17)
	Unshielded	3.05 (77.5)	1.64 (41.6)	0.36 (9)	0.67 (17)
18 mm	Shielded	2.73 (69.3)	2.00 (50.9)	0.02 (0.50)	0.94 (24)
	Unshielded	2.73 (69.3)	1.47 (37.4)	0.55 (14)	0.94 (24)
30 mm	Shielded	2.92 (74.1)	2.13 (54.1)	0.03 (0.75)	1.41 (36)
	Unshielded	2.92 (74.1)	1.41 (35.8)	0.75 (19)	1.41 (36)

Size	Shielding	Α	В	C	D
12 mm	Shielded	2.46 (62.4)	1.98 (50.3)	0.02 (0.5)	0.67 (17)
	Unshielded	2.46 (62.4)	1.64 (41.6)	0.36 (9)	0.67 (17)
18 mm	Shielded	2.54 (64.5)	2.00 (50.9)	0.02 (0.5)	0.94 (24)
	Unshielded	2.54 (64.5)	1.47 (37.4)	0.55 (14)	0.94 (24)
30 mm	Shielded	2.74 (69.6)	2.13 (54.1)	0.03 (0.75)	1.41 (36)
	Unshielded	2.74 (69.6)	1.41 (35.8)	0.75 (19)	1.41 (36)

Note

^① For models ending in -C1 (current output only models), pins 2 and 4 are intentionally connected.

Do not connect outputs of -C1 models to separate loads—this sensor should only be connected to a single-output load.

Ferrous Only Tubular Sensors

Ferrous Only Tubular Sensors



Contents

Description	Page	
Ferrous Only Tubular Sensors		
Product Selection		
Ferrous Only Tubular Sensors	V8-T3-56	
Compatible Connector Cables	V8-T3-56	
Accessories	V8-T3-56	
Technical Data and Specifications	V8-T3-57	
Wiring Diagrams	V8-T3-57	
Dimensions	V8-T3-57	

Ferrous Only Tubular Sensors

Product Description

These unique Inductive Proximity Sensors have been specially made by Eaton's Electrical Sector to detect only a specific type of metal. Ferrous Only models will detect only ferrous metals such as steel, iron, nickel or cobalt.

A typical application for **Ferrous Only** sensors would be in workcell applications where cutting tools, tool pallets and fixtures must be detected for proper workpiece manipulation. The sensors detect ferrous objects while ignoring aluminum.

These sensors are available in a standard 18 mm diameter, and are epoxy filled for shock/ vibration resistance and heat tolerance.

Features

- Ferrous Only sensors detect ferrous metals, such as steel or iron, while ignoring non-ferrous metals
- Selection of two-wire and three-wire, AC/DC and DC-only sensor models
- Wide operating temperature range: –13 to 158 °F (–25 to 70 °C)



THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

For Customer Service in the U.S. call 1-877-ETN CARE (386-2273), in Canada call 1-800-268-3578. For Application Assistance in the U.S. and Canada call 1-800-426-9184. 18 mm

Product Selection

Ferrous Only Tubular Sensors

Iwo-Wire S	Sensors			
Operating Voltage	Sensing Range (Sn)	Shielding	Connection Type	NO Output Catalog Number
18 mm Diam	eter			
20–250 Vac/dc	5.0 mm	Shielded	3-pin micro AC connector	E57FAL18A2SA 🕄
50/60 Hz			3-pin mini-connector	E57FAL18A2B1 \lambda

Three-Wire Sensors

100 ~

	Operating Voltage	Sensing Range (Sn)	Shielding	Connection Type	NO Output Catalog Number
18 mm	18 mm Dian	neter			
	10-30 Vdc	5.0 mm	Shielded (PNP)	4-pin micro DC connector	E57FAL18T111SD 🏽

Compatible Connector Cables

	Standard C	Cables 1						
	Current Rating at 600 V	Voltage Style	Number of Pins	Gauge	Length	Pin Configuration/Wire Colors (Face View Female Shown)	PVC Jacket Catalog Number	PUR Jacket Catalog Number
Micro-Style	Micro-Style,	Straight Fe	emale					
Straight Female	_	AC	3-pin, 3-wire	22 AWG	6.0 ft (2m)	(2) (3) 1-Green 2-Red/Black 3-Red/White	CSAS3F3CY2202	CSAS3F3RY2202
		DC	4-pin, 3-wire	22 AWG	6.0 ft (2m)	1-Brown 2-No Wire 3-Blue 4-Black	CSDS4A3CY2202	CSDS4A3RY2202
Mini-Style Straight Formale	Mini-Style, S	traight Fer	nale				Catalog Number	
Straight Female	13 A		3-pin	16 AWG	6.0 ft (2m)	(1) (3) (2) 1-Green 2-Black 3-White	CSMS3F3CY1602	

Accessories

Ferrous Only Tubular Sensors

Description	Reference
Mounting brackets	See Tab 8, section 8.2
Replacement mounting nuts and other accessories	See Tab 8, section 8.3
Connector cables	See Tab 10, section 10.1

Notes

See listing of compatible connector cables above.

① For a full selection of connector cables, see Tab 10, section 10.1.

Ferrous Only Tubular Sensors

Technical Data and Specifications

Ferrous Only Tubular Sensors

Description	Two-Wire AC/DC Sensors	Three-Wire DC Sensors
Operating voltage	20–250 Vac/dc	10-30 Vdc
Maximum load current	100 mA	100 mA
Switching frequency	15 Hz	1000 Hz
Leakage current	2.5 mA maximum	<0.01 mA
Voltage drop	10 V maximum	1.5 V maximum
Holding current	5 mA minimum	—
Burden current	-	17 mA
Protection	Transient, power on false pulse suppression	Short-circuit protection
Switching hysteresis	<15% rated sensing distance	<15% rated sensing distance
Repeat accuracy	<1% sensing distance	<1% sensing distance
Time delay before availability	<10 ms	<10 ms
Output indicator LED	Lights when output is ON	Lights when output is ON
Operating temperature	–13 to 131 °F (–25 to 55 °C)	–13 to 131 °F (–25 to 55 °C)
Enclosure ratings	NEMA 4, 4X, 6, 6P, 12 and 13 (IP67)	NEMA 4, 4X, 6, 6P, 12 and 13 (IP67)
Shock	30 g sine wave, 11 ms per IEC68-2-76	30 g sine wave, 11 ms per IEC68-2-76
Vibration	10 to 55 Hz, 1 mm amplitude in all three planes	10 to 55 Hz, 1 mm amplitude in all three planes
Housing material	Stainless steel	Stainless steel

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.


Ferrous Only Tubular Sensors

Operating Voltage	Output	Connector Models (Face View Male Shown Micro) Mini
Two-Wire Sensors			
20–250 Vac/dc 50/60 Hz	NO	L2 Load (3 2) L1	L1 (1) Load L2
Three-Wire Sensors	;		
10-30 Vdc	NO (PNP)	_	(-) Load (1) (4) +V

Dimensions

Approximate Dimensions in Inches (mm)

Ferrous Only Tubular Sensors



Connector Models

Catalog Number	Α	В	C	D
Two-Wire Models				
E57FAL18A2SA	M18 x 1	3.11 (79)	1.38 (35)	1.73 (44)
E57FAL18A2B1	M18 x 1	3.90 (99)	1.34 (34)	2.56 (65)
Three-Wire Models				
E57FAL18T111SD	M18 x 1	3.11 (79)	1.14 (29)	1.97 (50)

3.8

Inductive Proximity Sensors

Metal Face Sensors

Metal Face Sensors



Contents

Description	Page
Metal Face Sensors	
Product Selection	
Metal Face Sensors	V8-T3-59
Compatible Connector Cables	V8-T3-56
Accessories	V8-T3-60
Technical Data and Specifications	V8-T3-60
Wiring Diagrams	V8-T3-61
Dimensions	V8-T3-61

Metal Face Sensors

Product Description

Metal Face Inductive Proximity Sensors by Eaton's Electrical Sector incorporate tough stainless steel sensing faces in place of the plastic faces found in standard sensors. This provides a higher level of protection for more reliable operation and longer life in harsh environments.

The sensors stand up to abrasion and impact caused by flying metal chips, grit, and misaligned or vibrating targets. In addition, the stainless steel body resists corrosion and chemical attack.

Common sensor diameters, voltage styles and wiring connections make it easy to retrofit your existing, damaged sensors. Solve the problem of damaged sensors permanently with Eaton's Metal Face Sensors.

Features

- Two-wire AC/DC models and three-wire DC models are compatible with your existing wiring
- Common 12 mm, 18 mm and 30 mm housing diameters allow easy changeout of existing damaged sensors
- The 20 mil stainless steel sensing face is thicker than competing units for a higher level of protection
- The stainless steel body is damage and corrosion resistant
- Wide operating temperature range: –13 to 158 °F (–25 to 70 °C)

DANGER

THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

For the most current information on this product, visit our Web site: www.eaton.com For Customer Service in the U.S. call 1-877-ETN CARE (386-2273), in Canada call 1-800-268-3578. For Application Assistance in the U.S. and Canada call 1-800-426-9184.

3

Product Selection

Metal Face Sensors

	Two-Wire S	Sensors			
	Operating Voltage	Sensing Range (Sn)	Shielding	Connection Type	NO Output Catalog Number
12 mm	12 mm Diam	eter			
	20–250 Vac/dc 50/60 Hz	2 mm	Shielded	3-pin micro AC connector	E57FAL12A2SA-M 论
30 mm	30 mm Diam	eter			
	20–250 Vac/dc 50/60 Hz	10 mm	Shielded	3-pin micro AC connector	E57FAL30A2SA-M 论

	Three-Wi	re Sensors			
	Operating Voltage	Sensing Range (Sn)	Shielding	Connection Type	NO Output Catalog Number
12 mm	12 mm Diar	neter			
	10—30 Vdc	2 mm	Shielded (PNP)	4-pin micro DC connector	E57FAL12T111SD-M 🏵
18 mm	18 mm Diar	neter			
	10—30 Vdc	5 mm	Shielded (PNP)	4-pin micro DC connector	E57FAL18T111SD-M 🏵

Compatible Connector Cables

Standard Cables 1 Voltage Number **Pin Configuration/Wire Colors PVC Jacket** PUR Jacket **Catalog Number** Style of Pins Gauge Length (Face View Female Shown) **Catalog Number** Micro-Style Straight Female Micro-Style, Straight Female AC 22 AWG CSAS3F3CY2202 CSAS3F3RY2202 3-pin, 6.0 ft (2m) 1-Green 2-Red/Black 3-Red/White 3-wire 23 1 DC 22 AWG 1-Brown 2-White 3-Blue 4-Black CSDS4A4CY2202 CSDS4A4RY2202 4-pin, 6.0 ft (2m) 124-wire (4) (3)

Notes

: See listing of compatible connector cables above.

^① For a full selection of connector cables, see **Tab 10**, **section 10.1**.

Accessories

Metal Face Sensors

Description	Reference
Mounting brackets	See Tab 8, section 8.2
Replacement mounting nuts and other accessories	See Tab 8, section 8.3
Connector cables	See Tab 10, section 10.1

Technical Data and Specifications

Metal Face Sensors

Description	Two-Wire AC/DC Sensors	Three-Wire DC Only Sensors
Operating voltage	20–250 Vac/dc	10-30 Vdc
Maximum load current	100 mA	100 mA
Switching frequency		
12 mm	15 Hz	2000 Hz
18 mm	—	1000 Hz
30 mm	—	300 Hz
Leakage current	2.5 mA maximum	600 µA maximum
Voltage drop	10 V maximum	1.5 V maximum
Holding current	5 mA minimum	_
Burden current	_	17 mA
Protection	Transient, power on false pulse suppression	Short-circuit protection
Switching hysteresis	<15% rated sensing distance	<15% rated sensing distance
Repeat accuracy	<1% sensing distance	<1% sensing distance
Time delay before availability	<200 ms	<200 ms
Output indicator LED	Lights when output is ON	Lights when output is ON
Operating temperature	–13 to 131 °F (–25 to 55 °C)	–13 to 131 °F (–25 to 55 °C)
Enclosure ratings	NEMA 4, 4X, 6, 6P, 12 and 13 (IP67)	NEMA 4, 4X, 6, 6P, 12 and 13 (IP67)
Shock	30 g sine wave, 11 ms per IEC68-2-76	30 g sine wave, 11 ms per IEC68-2-76
Vibration	10 to 55 Hz, 1 mm amplitude in all three planes	10 to 55 Hz, 1 mm amplitude in all three planes
Housing material	303 stainless steel	303 stainless steel
Face thickness	20 mils	20 mils

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.

Metal Face Sensors


Operating Voltage	Output	Micro-Connector Models (Face View Male Shown)
Two-Wire Senso	rs	
20–250 Vac/dc 50/60 Hz	NO	L2 Load (3 (2) L1
Three-Wire Sens	ors	
10–30 Vdc	NO (NPN)	(-) (2) (1) +V (3) (4) Load
	NO (PNP)	(-) (2) (1) +V Load

Dimensions

Approximate Dimensions in Inches (mm)

Metal Face Sensors

Connector Models



Catalog Number	Α	В	C	D
Two-Wire Models				
E57FAL12A2SA-M	M x 12	2.67 (68)	1.10 (28)	1.58 (40)
E57FAL30A2SA-M	M x 30	3.70 (94)	1.34 (34)	2.36 (60)
Three-Wire Models				
E57FAL12T111SD-M	M x 12	2.67 (68)	1.02 (26)	1.65 (42)
E57FAL18T110SD-M	M x 18	3.11 (79)	1.14 (29)	1.97 (50)
E57FAL18T111SD-M	M x 18	3.11 (79)	1.14 (29)	1.97 (50)

3.9

Inductive Proximity Sensors

High Current Output Sensors

High Current Output Sensors



Contents

Description	Page
High Current Output Sensors	
Product Selection	V8-T3-63
Accessories	V8-T3-63
Technical Data and Specifications	V8-T3-64
Wiring Diagrams	V8-T3-64
Dimensions	V8-T3-64

High Current Output Sensors

Product Description

Now there is an alternative to limit switches for position sensing on industrial vehicles. High Current Output Sensors feature a continuous output current rating from 2 to 8 A. These sensors from Eaton's Electrical Sector are ideally suited to handle high current loads found on such industrial vehicles as aerial lift trucks, fork lifts, refuse trucks, cement mixers, dump trucks, hook and ladder trucks, front end loaders, farm equipment and hundreds of other vehicles that are constantly subjected to mechanical (shock, vibration, collisions) and environmental (dirt, grease, ice, rain) abuse that create havoc with mechanical devices.

Features

- Solid-state output can handle up to 8 A continuous
- Ideal for vehicle use to replace mechanical limit switches, typically required to handle high currents
- Wide voltage and temperature range covers most vehicle power supplies and operating environments
- Normally Open and Normally Closed isolated outputs
- SJO cable is available in custom lengths
- Dual colored 360° LED indicating light, green as power ON and red as output



THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

For the most current information on this product, visit our Web site: www.eaton.com For Customer Service in the U.S. call 1-877-ETN CARE (386-2273), in Canada call 1-800-268-3578. For Application Assistance in the U.S. and Canada call 1-800-426-9184.

3

High Current Output Sensors

Inductive Proximity Sensors

Product Selection

High Current Output Sensors

Four-Wire Sensors Output Rating Operating Sensing Voltage Shielding Output Type Continuous <100 ms Pulse $\textbf{Connection Type} \ \textcircled{1}$ Catalog Number Range 30 mm Diameter 10-55 Vdc 10 mm Shielded NO and NC 3.5 A 20 A E57-30JS10-H 2-meter cable (PNP)



30 mm

- Six-Wire Sensors @

	Operating	Sensing Range			Output Rating				
	Voltage		Shielding	Output Type	Continuous	<100 ms Pulse	Connection Type $^{}$	Catalog Number	
	30 mm Dia	meter							
	10–30 Vdc	10 mm	Shielded	NO and NO, or NC and NC (NPN or PNP)	8 A	50 A	2-meter cable	E57-30H\$10-K	

Accessories

High Current Output Sensors

Description	Reference
Mounting brackets	See Tab 8, section 8.2
Replacement mounting nuts and other accessories	See Tab 8, section 8.3

Notes

^① For additional cable length other than 2-meter, add desired length in meters to listed catalog number.

Example: For an E57-30JS10-H with a 5-meter cable, order E57-30JS10-H5. ⁽²⁾ 50 Amp surge, 12 Amp at 50% duty cycle and 8 Amp continuous. High Current Output Sensors


Technical Data and Specifications

High Current Output Sensors


Description	Four-Wire Sensors	Six-Wire Sensors
Operating voltage	10 to 55 Vdc	10 to 30 Vdc
Switching rate	250 Hz	100 Hz
Off-state current	100 Aµ maximum	100 Aµ maximum
Voltage drop	1.2 V	2.0 V
Burden current	10 mA at 55 volts	30 mA at 30 volts
Time delay before availability	<100 ms	<100 ms
Output indicator LED	360° visibility	360° visibility
Output type	Solid-state	Solid-state, isolated
Protection	Transient and power on false pulse	Transient and power on false pulse
Enclosure ratings	NEMA 4, 4X, 6, 6P, 12 and 13 (IEC IP67)	NEMA 4, 4X, 6, 6P, 12 and 13 (IEC IP67)
Ambient temperature range	-40 to 158 °F (-40 to 70 °C)	-40 to 158 °F (-40 to 70 °C)
Barrel material	303 stainless steel	303 stainless steel
Cable	2m standard SJO water resistive (18 AWG)	2m standard SJO water resistive (18 AWG)
Shock	30 g sine wave, 11 ms	30 g sine wave, 11 ms
Vibration	10 to 55 Hz, 2 mm amplitude in all 3 planes	10 to 55 Hz, 2 mm amplitude in all 3 planes

Wiring Diagrams


Four-Wire-PNP



Six-Wire-NO/NO Output Configuration



Six-Wire-NC/NC Output Configuration




Dimensions

Approximate Dimensions in Inches (mm)

High Current Output Sensors



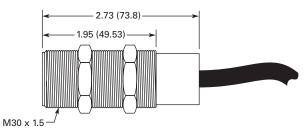

Small Diameter (4, 5, 6.5, 8 mm) Sensors

3.10



Small	Diameter	45	65	8 mm	Sensors
JIIIaII	DIAIIICICI	(4, J	, U.J,	, 0 11111	00113013

Product Description

These unique Inductive Proximity Sensors by Eaton's Electrical Sector are designed to be used in extremely small spaces. A wide variety of models are available with housing diameters from 8 mm all the way down to 4 mm, allowing you to choose the one that best fits your application. The sensors are three-wire devices that operate from 10 to 30 Vdc. Both shielded and unshielded versions are available.

Application Description

Typical Applications

- Automation equipment
- Robotics
- Machine tool
- Counting
- Sorting

Contents

Description	Page
Small Diameter (4, 5, 6.5, 8 mm) Sensors	
Product Selection	
Small Diameter (4, 5, 6.5, 8 mm) Sensors .	V8-T3-66
Compatible Connector Cables	V8-T3-68
Accessories	V8-T3-56
Technical Data and Specifications	V8-T3-69
Wiring Diagrams	V8-T3-69
Dimensions	V8-T3-70

Features

- Small 4, 5, 6.5 and 8 mm diameters for use in applications with limited space for mounting sensors
- Stainless steel housings
- All models include an LED indicator to show output status
- Short circuit and reverse polarity protection
- Rated NEMA 4, 4X, 6, 6P, 12 and 13 (IP67) for high resistance to environmental factors

Standards and Certifications

- cCSAus (8 mm only)
- CE



DANGER

THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

For the most current information on this product, visit our Web site: www.eaton.com For Customer Service in the U.S. call 1-877-ETN CARE (386-2273), in Canada call 1-800-268-3578. For Application Assistance in the U.S. and Canada call 1-800-426-9184. Small Diameter (4, 5, 6.5, 8 mm) Sensors

Product Selection

Small Diameter (4, 5, 6.5, 8 mm) Sensors

	Three-Wi	re Sensors						
	Operating Voltage	Sensing Range (Sn)	Shielding	Connection Type	NO Output Catalog Number	NC Output Catalog Number		
	4 mm Diameter (Unthreaded)							
	10-30 Vdc	0.8 mm	Shielded	2-meter cable	E57EAL4T110SP	_		
			(NPN)	3-pin nano-connector	E57EAL4T110SN 🔕	_		
			Shielded	2-meter cable	E57EAL4T111SP	_		
			(PNP)	3-pin nano-connector	E57EAL4T111SN 🔕	—		
	5 mm Diam	eter						
	10-30 Vdc	0.8 mm	Shielded	2-meter cable	E57EAL5T110SP	_		
			(NPN)	3-pin nano-connector	E57EAL5T110SN 🐱	_		
			Shielded	2-meter cable	E57EAL5T111SP	_		
			(PNP)	3-pin nano-connector	E57EAL5T111SN 🔕	_		
	6.5 mm Dia	meter (Unthread	ded)					
	10-30 Vdc	1 mm	Shielded	2-meter cable	E57EAL6T110SP	_		
			(NPN)	3-pin nano-connector	E57EAL6T110SN 🔕	_		
				4-pin micro DC connector	E57EAL6T110SD 🕄	_		
			Shielded (PNP)	2-meter cable	E57EAL6T111SP	_		
				3-pin nano-connector	E57EAL6T111SN 🔕	_		
				4-pin micro DC connector	E57EAL6T111SD 🙂	_		
		2 mm	Unshielded	2-meter cable	E57EAL6T110EP	_		
			(NPN) Unshielded	3-pin nano-connector	E57EAL6T110EN 🔕	_		
				2-meter cable	E57EAL6T111EP	_		
			(PNP)	3-pin nano-connector	E57EAL6T111EN 🔕	_		
	8 mm Diam	eter Short Body	,					
Body	10-30 Vdc	1 mm	Shielded	2-meter cable	E57EAL8T110SP	E57EBL8T110SP		
			(NPN)	3-pin nano-connector	E57EAL8T110SN 🔕	E57EBL8T110SN 🔕		
				4-pin micro DC connector	E57EAL8T110SD 🕃	E57EBL8T110SD 🔅		
			Shielded	2-meter cable	E57EAL8T111SP	E57EBL8T111SP		
			(PNP)	3-pin nano-connector	E57EAL8T111SN 🔕	E57EBL8T111SN 🔕		
				4-pin micro DC connector	E57EAL8T111SD 🕃	E57EBL8T111SD 🏵		
		2 mm	Unshielded	2-meter cable	E57EAL8T110EP	E57EBL8T110EP		
			(NPN)	3-pin nano-connector	E57EAL8T110EN 🕢	E57EBL8T110EN 🔅		
				4-pin micro DC connector	E57EAL8T110ED 🕄	E57EBL8T110ED 🔅		
			Unshielded	2-meter cable	E57EAL8T111EP	E57EBL8T111EP		
			(PNP)	3-pin nano-connector	E57EAL8T111EN 👀	E57EBL8T111EN 👀		
				4-pin micro DC connector	E57EAL8T111ED	E57EBL8T111ED 🏶		

Note

: See listing of compatible connector cables on Page V8-T3-68.

3.10

Small Diameter (4, 5, 6.5, 8 mm) Sensors

Inree-v	Vire Sensors,	continued						
Operating Voltage	Sensing Range	Shielding	Output Type	Connection Type	NO Output Catalog Number	NC Output Catalog Number		
8 mm Dia	ameter Standard	Length						
10-30 Vdc	1 mm	Shielded	NPN	2-meter cable	E57-08GS01-C	E57-08GS01-C1		
				3-pin nano-connector	E57-08GS01-CNB 🔕	E57-08GS01-C1NB 🕹		
				4-pin micro DC connector	E57-08GS01-CDB 🕄	E57-08GS01-C1DB 🏽		
			PNP	2-meter cable	E57-08GS01-G	E57-08GS01-G1		
				3-pin nano-connector	E57-08GS01-GNB 🔕	E57-08GS01-G1NB 🔕		
				4-pin micro DC connector	E57-08GS01-GDB 🏽	E57-08GS01-G1DB 🏶		
	3 mm		NPN	2-meter cable	E57-08GE03-C	E57-08GE03-C1		
	(extended rang	le)		3-pin nano-connector	E57-08GE03-CNB 🕄	E57-08GE03-C1NB 🕃		
				4-pin micro DC connector	E57-08GE03-CDB 🙁	E57-08GE03-C1DB 🏽		
			PNP	2-meter cable	E57-08GE03-G	E57-08GE03-G1		
				3-pin nano-connector	E57-08GE03-GNB 🔕	E57-08GE03-G1NB 🕃		
				4-pin micro DC connector	E57-08GE03-GDB 🙂	E57-08GE03-G1DB 🏵		
	2 mm	Unshielded	NPN	2-meter cable	E57-08GU02-C	E57-08GU02-C1		
				3-pin nano-connector	E57-08GU02-CNB 🔕	E57-08GU02-C1NB 🕃		
				4-pin micro DC connector	E57-08GU02-CDB 🙁	E57-08GU02-C1DB 🏵		
			PNP	2-meter cable	E57-08GU02-G	E57-08GU02-G1		
				3-pin nano-connector	E57-08GU02-GNB 🕃	E57-08GU02-G1NB 🕃		
				4-pin micro DC connector	E57-08GU02-GDB 🕄	E57-08GU02-G1DB 🏵		
	6 mm		NPN	2-meter cable	E57-08GE06-C	E57-08GE06-C1		
	(extended rang	le)		4-pin micro DC connector	E57-08GE06-CDB 🙂	E57-08GE06-C1DB 🏽		
			PNP	2-meter cable	E57-08GE06-G	E57-08GE06-G1		
				4-pin micro DC connector	E57-08GE06-GDB 🙂	E57-08GE06-G1DB 🏵		

Three-Wire Sensors, continued



Note

: See listing of compatible connector cables on Page V8-T3-31.

Small Diameter (4, 5, 6.5, 8 mm) Sensors

Compatible Connector Cables

	Standar	d Cables ^①								
	Voltage Style	Number of Pins	Gauge	Length	Pin Configuration/Wire Colors (Face View Female Shown)	PVC Jacket Catalog Number	PUR Jacket Catalog Number			
Micro-Style	Micro-Style, Straight Female									
Straight Female	DC	4-pin, 3-wire	22 AWG	6.0 ft (2m)	1-Brown 2-No Wire 3-Blue 4-Black	CSDS4A3CY2202	CSDS4A3RY2202			
		4-pin, 4-wire	22 AWG	6.0 ft (2m)	(1) (2) (4) (3) 1-Brown 2-White 3-Blue 4-Black	CSDS4A4CY2202	CSDS4A4RY2202			
Nano-Style	Nano-Sty	le, Straight Fei	male							
Straight Female	_	3-pin	24 AWG	6.0 ft (2m)	(3) (4) (1) 1-Brown 3-Blue 4-Black	CSNS3A3CY2402	CSNS3A3RY2402			

Accessories

82

Small Diameter Sensors

Description	Reference
Mounting brackets	See Tab 8, section 8.2
Replacement mounting nuts and other accessories	See Tab 8, section 8.3
Connector cables	See Tab 10, section 10.1

Note

① For a full selection of connector cables, see Tab 10, section 10.1.

Technical Data and Specifications

Small Diameter Sensors

Description	Three-Wire DC Only Sensors	
Operating voltage	10-30 Vdc	
Maximum load current	200 mA	
Switching frequency	2 kHz	
Leakage current	0.01 mA maximum	
Voltage drop	1.5 V maximum	
Burden current	10 mA maximum	
Protection	Transient, power on false pulse suppression, auto reset short circuit	
Switching hysteresis	<15% rated sensing distance	
Repeat accuracy	<1% sensing distance	
Time delay before availability	<50 ms	
Output indicator LED	Lights when output is ON	
Operating temperature	–13 to 158 °F (–25 to 70 °C)	
Enclosure ratings	NEMA 4, 4X, 6, 6P, 12 and 13 (IP67)	
Housing material	Stainless steel	
Cable	PVC high flex, oil/water resistant, 22 AWG	

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.

Small Diameter Sensors


Operating Voltage	Output	Cable Models	Connector Models (Face View Male Shown) Micro	Nano
Three-Wire	Sensors			
10–30 Vdc	NO (NPN)	BN +V BK Load BU (-)	(-) (2 (1) +V (3 (4) Load	(-) (4) (1) +V
	NO (PNP)	BN +V BK Load BU (_)	(-) (2) (1) +V Load	(1) (-) +V
	NC (NPN)	BN +V BK Load BU (-)	(-) (2 (1) +V (3 (4) +V	(4) (-) +V
	NC (PNP)	BN +V BK Load BU (_)	(-) Load (2) (1) +V (3) (4) +V	(4) (-) +V


Small Diameter (4, 5, 6.5, 8 mm) Sensors

Dimensions

Approximate Dimensions in Inches (mm)

Cable Models







Size A ①	Barrel Type	Length B	D	Thread Size	Nut Width F	Connector Diameter G	LED Location
Cable Models							
4 mm (S, Std)	Unthreaded	1.0 (25)	_	_	_	_	L1
5 mm (S, Std)	Threaded	1.0 (25)	0.8 (21)	M5 x 0.5	SW8		L1
6.5 mm (S/U, Std)	Unthreaded	1.8 (45)	—	_	_	_	L2
8 mm Short Body (S/U, Std)	Threaded	1.2 (30)	1.2 (30)	M8 x 1	SW13	_	L2
Standard Length							
8 mm (S, Std)	Threaded	1.77 (45)	1.77 (45)	M8 x 1	SW13		L2
8 mm (S, Ext)	Threaded	1.81 (46)	1.57 (40)	M8 x 1	SW13	_	L2
8 mm (U, Std)	Threaded	1.77 (45)	1.61 (41)	M8 x 1	SW13		L2
8 mm (U, Ext)	Threaded	1.77 (45)	1.61 (41)	M8 x 1	SW13	_	L2

Connector Models


Unthreaded Barrel







Standard Length 8 mm



Size A 1	Barrel Type	Length B	С	D	Thread Size	Nut Width F	Connector Diameter G	LED Location
Nano-Connector Mode	ls							
4 mm (S, Std)	Unthreaded	1.6 (40)	0.7 (18)	0.8 (21)	—	_	0.31 (8)	L1
5 mm (S, Std)	Threaded	1.6 (40)	0.7 (18)	0.8 (21)	M5 x 0.5	SW8	0.31 (8)	L1
6.5 mm (S/U, Std)	Unthreaded	2.4 (60)	1.5 (39)	2.0 (50)	—	_	0.31 (8)	L1
8 mm Short Body (S/U, Std)	Threaded	1.8 (45)	1.0 (25)	1.4 (36)	M8 x 1	SW13	0.31 (8)	L1
Standard Length								
8 mm (S, Std)	Threaded	2.36 (60)	0.79 (20)	1.57 (40)	M8 x 1	SW13	0.31 (8)	L2
8 mm (S, Ext)	Threaded	2.40 (61)	0.75 (19)	1.65 (42)	M8 x 1	SW13	0.31 (8)	L2
8 mm (U, Std)	Threaded	2.36 (60)	0.79 (20)	1.42 (36)	M8 x 1	SW13	0.31 (8)	L2
Micro-Connector Mode	ls							
6.5 mm (S/U, Std)	Unthreaded	2.9 (70)	1.4 (36)	1.5 (39)	—	_	0.47 (12)	L1
8 mm Short Body (S/U, Std)	Threaded	2.0 (50)	1.6 (40)	1.0 (25)	M8 x 1	SW13	0.47 (12)	L2
Standard Length								
8 mm (S, Std)	Threaded	2.76 (70)	0.83 (21)	1.93 (49)	M8 x 1	SW13	0.47 (12)	L2
8 mm (S, Ext)	Threaded	2.80 (71)	1.02 (26)	1.42 (36)	M8 x 1	SW13	0.47 (12)	L2
8 mm (U, Std)	Threaded	2.76 (70)	0.83 (21)	1.77 (45)	M8 x 1	SW13	0.47 (12)	L2
8 mm (U, Ext)	Threaded	2.76 (70)	1.22 (31)	1.38 (35)	M8 x 1	SW13	0.47 (12)	L2

Note

① U = Unshielded (4 mm cap), S = Shielded; Std = Standard Range, Ext = Extended Range.

3.11

E56 Pancake Sensors



Contents

Description	Page	
E56 Pancake Sensors		
Product Selection		
E56 Pancake Sensors	V8-T3-72	
Compatible Connector Cables	V8-T3-73	
Technical Data and Specifications	V8-T3-74	
Wiring Diagrams	V8-T3-75	
Dimensions	V8-T3-75	

E56 Pancake Sensors

Product Description

The E56 Pancake Sensor from Eaton's Electrical Sector is a high performance inductive proximity sensor. The E56 Pancake provides greater sensing ranges than other inductive sensor package types.

The E56 Pancake family provides convenience and ease of wiring with autoconfigurable, complementary outputs. (Auto-configurable outputs automatically detect an NPN or PNP output configuration and switch the sensor accordingly, without user intervention.) Power and output LEDs make troubleshooting much easier than conventional proximity sensors, which usually only feature output LEDs. These convenience features, combined with the performance of the E56 Pancake, make it an excellent inductive sensing solution for applications requiring an extremely rugged, long-range sensing solution.

Application Description Typical Applications

Heavy-duty trucks, cranes

- and machinery
- Steel mills
- Pipe and rod manufacturing
- Automotive manufacturing
- Amusement parks

Features

- Longest inductive sensing ranges available (up to 100 mm)
- Three sizes to meet your application needs, with maximum ranges of 50, 70 or 100 mm
- Complementary outputs (1NO/1NC) on four-wire DC models
- Auto-configure output technology on four-wire DC models, which automatically detect how the sensor has been wired (NPN or PNP) and switch the sensor without user intervention
- Small diameter, two-wire AC models feature a selector switch inside the housing, enabling output contacts to be used as either NO or NC
- Robust design featuring vibration and impactabsorbing potting compound
- Ideal for extreme temperatures or high pressure washdown environments

Standards and Certifications

• CE



DANGER

THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

For the most current information on this product, visit our Web site: www.eaton.com For Customer Service in the U.S. call 1-877-ETN CARE (386-2273), in Canada call 1-800-268-3578. For Application Assistance in the U.S. and Canada call 1-800-426-9184.

Product Selection

E56 Pancake Sensors

Pancake Style Two-Wire Sensors Voltage Output



Voltage Type	Output Configuration	Output Contacts	Shielding	Sensing Range	Connector Style	Catalog Number
Pancake Sty	le					
20—250 Vac 45/65 Hz	_	NO or NC	Unshielded	1.57 in (40 mm)	Screw terminals	E56CDL40A2
40/00112	Π2			3-pin mini-connector	E56CDL40A2B1 🐱	
		NO or NC	Unshielded	2 in (50 mm)	Screw terminals	E56CDL50A2E
					3-pin mini-connector	E56CDL50A2EB1 🔅
90–260 Vac 45/65 Hz	_	NO	Unshielded	2.75 in (70 mm) ^①	3-pin mini-connector	E56CAL70B1S1 🐱
		NO	Unshielded	3.94 in (100 mm) 1	3-pin mini-connector	E56CAL100B1S1 🕹

DC Four-Wire Sensors

Voltage Type	Output Configuration	Output Contacts	Shielding	Sensing Range	Connector Style	Catalog Number
Small Diam	eter (79 x 79 x 39	mm)				
10-42 Vdc	NPN/PNP	1 NO and 1 NC	Shielded	1.57 in (40 mm)	DC screw	E56ADL40SA
	autoconfigure ⁽²⁾				DC 4-pin mini	E56ADL40SAE01 🕃
					DC 4-pin micro	E56ADL40SAD01
			Unshielded	1.57 in (40 mm)	DC screw	E56ADL40UA
					DC 4-pin mini	E56ADL40UAE01 🔅
					DC 4-pin micro	E56ADL40UAD01
			Unshielded	2 in (50 mm)	DC screw	E56ADL50UA
					DC 4-pin mini	E56ADL50UAE01
					DC 4-pin micro	E56ADL50UAD01 🤅
Medium Dia	ameter (110 x 110 x	x 41 mm)				
10-42 Vdc	NPN/PNP autoconfigure ②	1 NO and 1 NC	Unshielded	2.75 in (70 mm)	DC 4-pin mini	E56BDL70UAE01 🤅
					DC 4-pin micro	E56BDL70UAD01 🤅
Large Diam	eter (172 x 172 x 6	i8 mm)				
10-42 Vdc	NPN/PNP autoconfigure ^②	1 NO and 1 NC	Unshielded	3.94 in (100 mm)	DC 4-pin mini	E56CDL100UAE01
					DC 4-pin micro	E56CDL100UAD01

Notes

: See listing of compatible connector cables on Page V8-T3-73.

^① Includes potentiometer for adjustment of sensing range.

⁽²⁾ Autoconfigure technology allows the sensor to automatically adapt to NPN or PNP without user intervention.

E56 Pancake Sensors

Inductive Proximity Sensors

Compatible Connector Cables

	Standard C	ables 1						
	Current Rating at 600 V	Voltage Style	Number of Pins	Gauge	Length	Pin Configuration/Wire Colors (Face View Female Shown)	PVC Jacket Catalog Number	PUR Jacket Catalog Number
ro-Style	Micro-Style,	Straight Fe	emale					
aight Female	_	AC	3-pin,	22 AWG	6.0 ft (2m)	八、	CSAS3F3CY2202	CSAS3F3RY2202
			3-wire		16.4 ft (5m)	- (2 3) 1-Green 2-Red/Black	CSAS3F3CY2205	CSAS3F3RY2205
					32.8 ft (10m)	- 1 3-Red/White	CSAS3F3CY2210	CSAS3F3RY2210
	_	DC	4-pin,	22 AWG	6.0 ft (2m)	1-Brown	CSDS4A4CY2202	CSDS4A4RY2202
		4-wir	4-wire	4-wire	16.4 ft (5m)	- (1)(2) (1)(2) (1)(2) (2)(2)(2) (2)(2)(2) (2)(2)(2)(2) (2)(2)(2)(2)(2)(2)(2)(2)(2)(2)(2)(2)(2)(CSDS4A4CY2205	CSDS4A4RY2205
					32.8 ft (10m)	- (4) 3 3-Blue 4-Black	CSDS4A4CY2210	CSDS4A4RY2210
-Style	Mini-Style, S	traight Fer	nale					
ght Female	13 A	_	3-pin,	16 AWG	6.0 ft (2m)	- (1) 1-Green	CSMS3F3CY1602	_
			3-wire		13.1 ft (4m)	- (1) 1-Green 2-Black 3 (2) 3-White	CSMS3F3CY1604	_
	10 A	AC/DC	4-pin,	16 AWG	6.0 ft (2m)	1-Black	CSMS4A4CY1602	_
			4-wire		13.1 ft (4m)	- ((4)(1)) 2-Blue	CSMS4A4CY1604	_
					19.7 ft (6m)	- 32 3-Brown 4-White	CSMS4A4CY1606	_

Note

1 For a full selection of connector cables, see Tab 10, section 10.1.

3

E56 Pancake Sensors

Technical Data and Specifications

Two-Wire

	AC Two-Wire		
Description	Small Diameter	Medium Diameter	Large Diameter
Operating voltage	20–250 Vac	20–250 Vac	20–250 Vac
Load current (maximum)	400 mA	400 mA	400 mA
Off-state leakage	At or above 32 °F (0 °C): <1.7 mA; below 32 °F (0 °C): 2.0 mA	At or above 32 °F (0 °C): <1.7 mA; below 32 °F (0 °C): 2.0 mA	At or above 32 °F (0 °C): <1.7 mA; below 32 °F (0 °C): 2.0 mA
Voltage drop	<10 V (5 V nominal)	<10 V (5 V nominal)	<10 V (5 V nominal)
Outputs	NO or NC (switch selectable)	NO or NC by model	NO or NC by model
Sensing range (maximum)	50 mm	70 mm	100 mm
Range adjustment	Not adjustable	Potentiometer adjustable down to 50% of rated maximum range	Potentiometer adjustable down to 50% of rated maximum range
Standard target size (mild steel)	150 mm	210 mm	300 mm
Frequency of operation	30 Hz	10 Hz	10 Hz
Repeatability	<3%	<3%	<3%
Hysteresis (maximum)	10–15%	10–15%	10–15%
Time delay before availability	300 ms	300 ms	300 ms
Circuit protection	Short-circuit protection with auto reset	Short-circuit protection with auto reset	Short-circuit protection with auto reset
Operating temperature	–13 to 158 °F (–25 to 70 °C) ^①	–13 to 158 °F (–25 to 70 °C) \odot	–13 to 158 °F (–25 to 70 °C) $^{\odot}$
Temperature drift	±10%	±10%	±10%
Enclosure rating	NEMA 4, 4X, 6, 6P, 12 and 13 (IP67)	NEMA 4, 4X, 6, 6P, 12 and 13 (IP67)	NEMA 4, 4X, 6, 6P, 12 and 13 (IP67)
Indicator LEDs	Output status	Output status	Output status
Materials of construction	PPS housing	PPS housing; aluminum baseplate	PPS housing; aluminum baseplate

Four-Wire

	DC Four-Wire		
Description	Small Diameter	Medium Diameter	Large Diameter
Operating voltage	10-42 Vdc	10-42 Vdc	10-42 Vdc
Load current (maximum)	300 mA	300 mA	300 mA
Burden current	<25 mA	<25 mA	<25 mA
Off-state leakage	<150 µA per output	<150 µA per output	<150 µA per output
Voltage drop	<2.5 V	<2.5 V	<2.5 V
Outputs	1 NO/1 NC (complementary)	1 NO/1 NC (complementary)	1 NO/1 NC (complementary)
Sensing range (maximum)	50 mm	70 mm	100 mm
Range adjustment	Not adjustable	Potentiometer adjustable down to 50% of rated maximum range	Potentiometer adjustable down to 50% of rated maximum range
Standard target size (mild steel)	150 mm	210 mm	300 mm
Frequency of operation	70 Hz	40 Hz	30 Hz
Repeatability	<3%	<3%	<3%
Hysteresis (maximum)	10–15%	10–15%	10–15%
Time delay before availability	300 ms	300 ms	300 ms
Circuit protection	Short-circuit protection with auto reset	Short-circuit protection with auto reset	Short-circuit protection with auto reset
Operating temperature	–13 to 158 °F (–25 to 70 °C) ^①	–13 to 158 °F (–25 to 70 °C) ①	–13 to 158 °F (–25 to 70 °C) ^①
Temperature drift	±10%	±10%	±10%
Enclosure rating	NEMA 4, 4X, 6, 6P, 12 and 13 (IP67)	NEMA 4, 4X, 6, 6P, 12 and 13 (IP67)	NEMA 4, 4X, 6, 6P, 12 and 13 (IP67)
Indicator LEDs	Green: power; Red: output status	Green: power; Red: output status	Green: power; Red: output status
Materials of construction	PPS housing	PPS housing; aluminum baseplate	PPS housing; aluminum baseplate

Note

① Small diameter DC unshielded models are rated at -40 °F (-40 °C). All other models can be operated at -40 °F (-40 °C), but range drift will occur.


E56 Pancake Sensors

3.11

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.


E56 Pancake Sensors

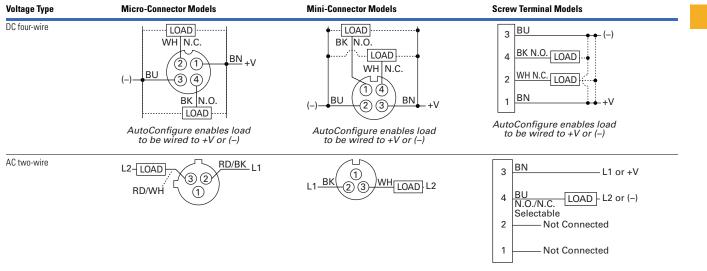

Dimensions

Approximate Dimensions in Inches (mm)

E56 Pancake Sensors



Model	A (Depth)	B (Width)	C (Depth)	D (Height)	E (Mounting)	F (Mounting)	G (Diameter)
Small Diameter	r Models						
Micro-connector	3.13 (79.0)	3.13 (79.0)	4.32 (110.0)	1.54 (39.0)	2.56 (65.0)	2.56 (65.0)	0.21 (5.0)
Mini-connector	3.13 (79.0)	3.13 (79.0)	4.67 (119.0)	1.54 (39.0)	2.56 (65.0)	2.56 (65.0)	0.21 (5.0)
Screw terminal	3.13 (79.0)	3.13 (79.0)	3.87 (92.0)	1.54 (39.0)	2.56 (65.0)	2.56 (65.0)	0.21 (5.0)
Medium Diame	ter Models						
Micro-connector	4.35 (110.0)	4.35 (110.0)	4.94 (125.4)	1.63 (41.0)	3.625 (92.0)	3.625 (92.0)	0.218 (5.5)
Mini-connector	4.35 (110.0)	4.35 (110.0)	5.29 (134.4)	1.63 (41.0)	3.625 (92.0)	3.625 (92.0)	0.218 (5.5)
Large Diameter	Models						
Micro-connector	6.75 (171.5)	6.75 (171.5)	7.26 (184.4)	2.66 (67.5)	5.875 (149.0)	5.875 (149.0)	0.266 (7.0)
Mini-connector	6.75 (171.5)	6.75 (171.5)	7.61 (193.3)	2.66 (67.5)	5.875 (149.0)	5.875 (149.0)	0.266 (7.0)

Nonmetallic Tubular Sensors



3.17



Contents

Description	Page
Nonmetallic Tubular Sensors	
Product Selection	V8-T3-77
Technical Data and Specifications	V8-T3-78
Wiring Diagrams	V8-T3-78
Dimensions	V8-T3-78

Nonmetallic Tubular Sensors

Product Description

E55 Tubular Inductive Proximity Sensors by Eaton's Electrical Sector are constructed of corrosion resistant PBT plastic. They are ideally suited for wash down applications such as those found in food processing plants. They are available in 12 mm, 18 mm and 30 mm diameters, shielded or unshielded. Shielded units can be embedded in metallic surfaces.

Features

- Models available that operate on two-wire AC or three-wire DC power
- Threaded tubular housings in three diameters allow easy integration into new and existing applications
- Nonmetallic construction offers excellent resistance to corrosion
- Output indicator LED is standard on all models



THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

For the most current information on this product, visit our Web site: www.eaton.com

Nonmetallic Tubular Sensors

Inductive Proximity Sensors

Product Selection

Nonmetallic Tubular Sensors

Two-Wire Sensors 10

	Operating Voltage	Sensing Range (Sn)	Shielding	Connection Type	NO Output Catalog Number	NC Output Catalog Number
12 mm	12 mm Dia	meter				
11	20–250 Vac 50/60 Hz	2 mm	Shielded	2-meter cable	E55CAL12A2	E55CBL12A2
		4 mm	Unshielded	2-meter cable	E55CAL12A2E	E55CBL12A2E
18 mm	18 mm Dia	meter				
	20–250 Vac 50/60 Hz	5 mm	Shielded	2-meter cable	E55CAL18A2	E55CBL18A2
		8 mm	Unshielded	2-meter cable	E55CAL18A2E	E55CBL18A2E
30 mm	30 mm Dia	meter				
	20–250 Vac 50/60 Hz	10 mm	Shielded	2-meter cable	E55CAL30A2	E55CBL30A2
		15 mm	Unshielded	2-meter cable	E55CAL30A2E	E55CBL30A2E

Three-Wire Sensors ⁽¹⁾

	Operating Voltage	Sensing Range (Sn)	Shielding	Connection Type	NO Output Catalog Number	NC Output Catalog Number
mm	12 mm Dia	meter				
1	10-30 Vdc	2 mm	Shielded (NPN)	2-meter cable	E55CAL12T110	E55CBL12T110
			Shielded (PNP)	2-meter cable	E55CAL12T111	E55CBL12T111
		4 mm	Unshielded (NPN)	2-meter cable	E55CAL12T110E	E55CBL12T110E
			Unshielded (PNP)	2-meter cable	E55CAL12T111E	E55CBL12T111E
ım	18 mm Dia	meter				
-	10-30 Vdc	5 mm	Shielded (NPN)	2-meter cable	E55CAL18T110	E55CBL18T110
			Shielded (PNP)	2-meter cable	E55CAL18T111	E55CBL18T111
		8 mm	Unshielded (NPN)	2-meter cable	E55CAL18T110E	E55CBL18T110E
			Unshielded (PNP)	2-meter cable	E55CAL18T111E	E55CBL18T111E
m	30 mm Dia	meter				
	10-30 Vdc	10 mm	Shielded (NPN)	2-meter cable	E55CAL30T110	E55CBL30T110
	8		Shielded (PNP)	2-meter cable	E55CAL30T111	E55CBL30T111
		15 mm	Unshielded (NPN)	2-meter cable	E55CAL30T110E	E55CBL30T110E
			Unshielded (PNP)	2-meter cable	E55CAL30T111E	E55CBL30T111E

Note

^① For a selection of mounting brackets and other accessories for use with these sensors, see **Tab 8**, section 8.2.

Nonmetallic Tubular Sensors

Technical Data and Specifications

Nonmetallic Tubular Sensors

Description	Two-Wire AC Models	Three-Wire DC Models
Operating voltage	20–250 Vac, 50/60 Hz	10–30 Vdc
Maximum load current	150 mA	200 mA
Switching frequency		
12 mm	25 Hz	2000 Hz (shielded); 1000 Hz (unshielded)
18 mm	25 Hz	1000 Hz (shielded); 500 Hz (unshielded)
30 mm	25 Hz	300 Hz (shielded); 150 Hz (unshielded)
Protection		Short circuit and reverse polarity
Temperature range	–13 to 158 °F (–25 to 70 °C)	–13 to 158 °F (–25 to 70 °C)
Enclosure material	Polybutylene Teraphtalate (PBT)	Polybutylene Teraphtalate (PBT)
Enclosure rating	NEMA 3, 3S, 4, 4X, 13 (IP66)	NEMA 3, 3S, 4, 4X, 13 (IP66)
Indicator LED	Lights when output is ON	Lights when output is ON

Wiring Diagrams

Nonmetallic Tubular Sensors

Operating Voltage	Output	Cable Models	Operating Voltage	Output	Cable Models
Two-Wire S	ensors		Three-Wire	Sensors	
20–250 Vac 50/60 Hz	All	BN L1 or +V BU Load L2 or (-)	 10–30 Vdc	NPN	BN +V BK Load BU (-)
				PNP	BN +V BK Load BU (_)

Dimensions


Approximate Dimensions in Inches (mm)

12 and 18 mm

30 mm


A

30 mm



A	В	Thread Size C
12 mm		
2.17 (55)	1.77 (45)	M12 x 1

2.17 (55)	1.77 (45)	M12 x 1	
18 mm			
2.17 (55)	1.77 (45)	M18 x 1	



Thread Size B C

3.15 (80) 2.36 (60) M30 x 1.5	
-------------------------------	--

3.13

E52 Cube Style Sensors



Contents

Description	Page
E52 Cube Style Sensors	
Product Selection	
E52 Cube Style Sensors	V8-T3-80
Compatible Connector Cables	V8-T3-80
Technical Data and Specifications	V8-T3-81
Wiring Diagrams	V8-T3-81
Dimensions	V8-T3-82

E52 Cube Style Sensors

Product Description

The E52 Cube Sensor from Eaton's Electrical Sector is a high performance inductive proximity sensor, providing long sensing ranges in a compact, industry-standard package.

The E52 Cube family features Eaton's Autoconfigure output technology, which automatically detects NPN or PNP wiring states and switches the sensor accordingly, without user intervention. The E52 also utilizes complementary outputs to further reduce the number of models needed to cover a wide array of inductive sensing applications. Individual power and output LEDs make installation and troubleshooting easy. Combine the above features with the range and five-way mounting flexibility of the E52 Cube family, and chances are there's an E52 solution to your sensing needs.

The E52 Cube was designed with the most heavy-duty applications in mind. Some of those applications include automotive manufacturing, aggregate machinery, and metalworking applications. Try the E52 Cube in some your most demanding applications today.

Application Description

Typical Applications

- Automotive manufacturing
- Metalworking
- Machinery OEMs
- Pipe and rod manufacturing
- Block and brick
 manufacturing equipment
- Amusement parks
- Heavy-duty trucks, cranes and lifts

Features

- Long inductive proximity ranges available (up to 40 mm sensing distance)
- Four-wire DC models have complementary outputs (1NO-1NC)
- Four-wire DC models use auto-configure technology, which allows the sensor to automatically adapt for NPN or PNP without user intervention
- Robust design featuring vibration and impactabsorbing potting compound
- Ideal for extreme temperatures or high pressure washdown environments

Standards and Certifications

• CE



DANGER

THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

For the most current information on this product, visit our Web site: www.eaton.com

E52 Cube Style Sensors

Product Selection

E52 Cube Style Sensors

3

	DC Four-W	DC Four-Wire Sensors						
	Voltage Type	Output Configuration	Shielding	Output Type	Sensing Range	Connector Style	Catalog Number	
Connector	Cube Packag	ge (40 x 40 x 40 mm)						
2</td <td>10-48 Vdc</td> <td>NPN/PNP</td> <td>Shielded</td> <td>1 NO and 1 NC</td> <td>15 mm</td> <td>DC 4-pin micro</td> <td>E52Q-DL15SAD01 🔅</td>	10-48 Vdc	NPN/PNP	Shielded	1 NO and 1 NC	15 mm	DC 4-pin micro	E52Q-DL15SAD01 🔅	
\geq		autoconfigure 1				DC 4-pin mini	E52Q-DL15SAE01 🙁	
			Unshielded	1 NO and 1 NC	15 mm	DC 4-pin micro	E52Q-DL15UAD01 🏽	
						DC 4-pin mini	E52Q-DL15UAE01 🏽	
- 21/	10-48 Vdc	NPN/PNP	Shielded	1 NO and 1 NC	20 mm	DC 4-pin micro	E52Q-DL20SAD01 🔅	
		autoconfigure (1)				DC 4-pin mini	E52Q-DL20SAE01 🙁	
Connector			Unshielded	1 NO and 1 NC	20 mm	DC 4-pin micro	E52Q-DL20UAD01 🏽	
						DC 4-pin mini	E52Q-DL20UAE01 🔅	
7					25 mm	DC 4-pin micro	E52Q-DL25UAD01 🙂	
						DC 4-pin mini	E52Q-DL25UAE01 🏽	
					30 mm	DC 4-pin micro	E52Q-DL30UAD01 🙂	
						DC 4-pin mini	E52Q-DL30UAE01 🏽	
A 19					35 mm	DC 4-pin micro	E52Q-DL35UAD01 🏽	
						DC 4-pin mini	E52Q-DL35UAE01 🙂	
					40 mm	DC 4-pin micro	E52Q-DL40UAD01 🏽	
						DC 4-pin mini	E52Q-DL40UAE01 🙂	

Compatible Connector Cables

Standard Cables 2

	Current Rating at 600 V	Voltage Style	Number of Pins	Gauge	Length	Pin Configuration/Wire Colors (Face View Female Shown)	PVC Jacket Catalog Number	PUR Jacket Catalog Number
icro-Style	Micro-Style, S	Straight Fe	male					
traight Female	_	DC	4-pin, 4-wire	22 AWG	6.0 ft (2m)	1-Brown 2-White	CSDS4A4CY2202	CSDS4A4RY2202
					16.4 ft (5m)	4 3 3-Blue 4-Black	CSDS4A4CY2205	CSDS4A4RY2205
					32.8 ft (10m)	_	CSDS4A4CY2210	CSDS4A4RY2210
ini-Style	Mini-Style, St	traight Fen	nale					
traight Female	10 A	AC/DC	4-pin, 4-wire	16 AWG	6.0 ft (2m)	(4) (1) 1-Black 2-Blue	CSMS4A4CY1602	_
					13.1 ft (4m)	3-Brown 4-White	CSMS4A4CY1604	_
					19.7 ft (6m)		CSMS4A4CY1606	_

Notes

 $\textcircled{\ensuremath{\mathfrak{s}}}$ See listing of compatible connector cables above.

 $^{\odot}$ Autoconfigure technology allows the sensor to automatically adapt to NPN or PNP without user intervention.

⁽²⁾ For a full selection of connector cables, see Tab 10, section 10.1.

Technical Data and Specifications


E52 Cube Style Sensors

Description	DC Four-Wire
Operating voltage	10-48 Vdc
Load current (maximum)	300 mA
Burden current	<25 mA
Off-state leakage	<150 µA per output
Voltage drop	<2.5 V
Outputs	1 NO/1 NC (complementary)
Standard target size (mild steel)	120 mm
Frequency of operation	100 Hz
Repeatability	<3%
Hysteresis (maximum)	10–15%
Time delay before availability	300 ms
Circuit protection	Short-circuit protection with auto reset
Operating temperature ①	–25 to 158 °F (–25 to 70 °C)
Temperature drift	±10%
Enclosure rating	NEMA 4, 4X, 6, 6P, 12 and 13 (IP67, IP68)
Indicator LEDs	Green: power; Red: output status
Material of construction	Zinc alloy housing, PPS, PC

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.

E52 Cube Style Sensors

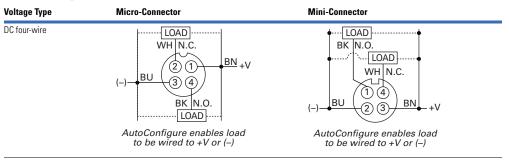

Note


 $^{(1)}$ Will operate at –40 °F (–40 °C), but range drift will occur.

3.13 Inductive Proximity Sensors E52 Cube Style Sensors

Dimensions


Approximate Dimensions in Inches (mm)

E52 Cube Style Sensors

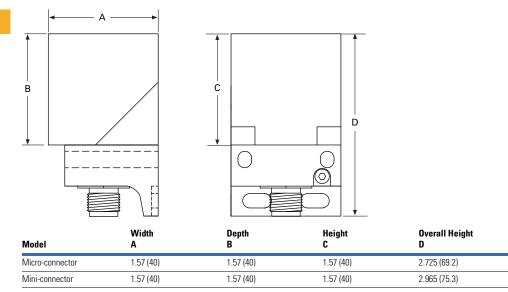

3

E52 Rectangular Style Sensors

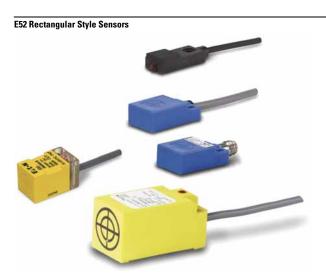

Contents

Description	Page	
E52 Rectangular Style Sensors		
Product Selection		
E52 Rectangular Style Sensors	V8-T3-84	
Compatible Connector Cables	V8-T3-84	
Technical Data and Specifications	V8-T3-84	
Wiring Diagrams	V8-T3-85	
Dimensions	V8-T3-85	

E52 Rectangular Style Sensors

Product Description

Rectangular E52 Inductive Proximity Sensors from Eaton's Electrical Sector feature a small, thin, compact space-saving design for applications where tubular type sensors cannot be used. Sensors are self-contained for direct connection to a logic circuit, relay, counter, programmable controller, and so on.

Features

- Small, low-profile design for use in space restrictive applications
- Three-wire DC operation
- Choose from a variety of sizes, and side or end sensing configurations
- Output indicator included on all models
- Epoxy filled cavities stop fluids from contacting any electrical component
- Convenient mounting holes integrated into each sensor housing



THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

For the most current information on this product, visit our Web site: www.eaton.com

E52 Rectangular Style Sensors

Product Selection

E52 Rectangular Style Sensors

Three-Wire Models

	Voltage	Sensing Range	Frequency	Shielding	Connection Type	NO Output Catalog Number	NC Output Catalog Number
Side Sensing	R12 Side S	ensing					
	12-24 Vdc	0.12 in (3 mm)	Standard	Shielded (NPN)	1-meter cable	E52RAL12T110	_
				Shielded (PNP)		E52RAL12T111	_
			Alternate	Shielded (NPN)	1-meter cable	E52RAL12T110AF	_
				Shielded (PNP)		E52RAL12T111AF	_
End Sensing	Q16 End S	ensing					
Finth	12-30 Vdc	0.20 in (5 mm)	Standard	Unshielded (NPN)	2-meter cable	E52-16QS04-C	E52-16QS04-C1
-				Unshielded (PNP)	2-meter cable	E52-16QS04-B	E52-16QS04-B1
Side Sensing	R18 Side S	ensing					
	10-30 Vdc	0.16 in (4 mm)	Standard	Unshielded (NPN)	2-meter cable	E52-18RU04-C	E52-18RU04-C1
					3-pin nano-connector	E52-18RU04-CN 🔕	E52-18RU04-C1N 🕢
				Unshielded (PNP)	2-meter cable	E52-18RU04-B	E52-18RU04-B1
					3-pin nano-connector	E52-18RU04-BN 🔕	E52-18RU04-B1N 🔕
End Sensing	Q25 End S	ensing					
SA .	10-30 Vdc	0.39 in (10 mm)	Standard	Shielded (NPN)	2-meter cable	E52-25QS10-C	E52-250S10-C1
-				Shielded (PNP)	2-meter cable	E52-25QS10-B	E52-25QS10-B1

Compatible Connector Cables

	Standar	Standard Cables [©]							
	Voltage Style	Number of Pins	Gauge	Length	Pin Configuration/Wire Colors (Face View Female Shown)	PVC Jacket Catalog Number	PUR Jacket Catalog Number		
Nano-Style	Nano-Sty	le, Straight Fe	male						
Straight Female	DC	3-pin	24 AWG	6.0 ft (2m)	(3) (4) 1-Brown 3-Blue 4-Black	CSNS3A3CY2402	CSNS3A3RY2402		

Technical Data and Specifications

E52 Rectangular Style Sensors

Description	Specification
Input current	Less than 10 mA
Load current	100 mA maximum
Switching rate	500 operations per second
Circuit protection	Short circuit
Ambient temperature range	–13 to 130 °F (–10 to 55 °C)
Enclosure rating	NEMA 1, 2, 3, 3S, 4, 12 (IEC IP66)
Enclosure material	PBT composition
Output indicator LED	Lights when output is ON

Notes

See listing of compatible connector cables above.

^① For a full selection of connector cables, see **Tab 10**, **section 10.1**.

E52 Rectangular Style Sensors

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.

E52 Rectangular Style Sensors

Operating Voltage	Output	Cable Models	Nano-Connector Models (Face View Male Shown)
Three-Wire	e Sensors		
DC	NPN	BK Load +V BU (-)	(-) (4) (1) +V
	PNP	BN +V BK Load BU (_)	(4) (1) (-) +V


Dimensions

Approximate Dimensions in Inches (mm) except where noted

E52 Rectangular Style Sensors


R12

R18




Note: Dimensions are mm only.










1.18 (30) 0.13 x 0.18 (3.2 x 4.6) 0.17 (4.2) 0.71 (18) 60 0.71 (18) 90 JC 1 ¥ 0.18 (4.6) 0.91 (23) ¥ ¥ -LED 0.39 (10) ł 0.39 (10) ł ł 0.24 (6)



3.14

E55 Limit Switch Style Sensors with Nonmetallic Housings

E55 Limit Switch Style Sensors with Nonmetallic Housings



Contents

Description	Page
E55 Limit Switch Style Sensors with Nonmetallic Housings	
Product Selection	V8-T3-86
Technical Data and Specifications	V8-T3-87
Wiring Diagrams	V8-T3-87
Dimensions	V8-T3-87

E55 Limit Switch Style Sensors with Nonmetallic Housings

Product Description

These sensors from Eaton's Electrical Sector feature PBT resin housings for high resistance to corrosion. The housing is sized to offer a direct replacement for standard limit switches. The unique sensing head is factory assembled for top sensing, but can be easily converted in the field to any one of four side sensing positions. Models are available with sensing ranges from 15 mm to 40 mm. The sensors can be wired for NO or NC operation.

Features

- Nonmetallic housing offers excellent resistance to corrosion
- Same form factor and mounting as standard limit switches for easy retrofit
- Sensor head features five
- sensing positions (top and all four sides) that can be easily changed in the fieldLong sensing ranges up to
- 40 mm

DANGER

THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

Product Selection

E55 Limit Switch Style Sensors

E55 Limit Switch	Two-Wire	Sensors
------------------	-----------------	---------

1	Voltage Type	Sensing Range (Sn)	Shielding	Output	Connection Type	Catalog Number
1	35–250 Vac	15 mm	Shielded	NO or NC	Terminal wiring	E55BLT1C
1		20 mm	Unshielded			E55BLT1D
		30 mm				E55BLT1E
		40 mm				E55BLT1F

For the most current information on this product, visit our Web site: www.eaton.com

Technical Data and Specifications

E55 Limit Switch Style Sensors

Description	Specification
Operating voltage	35–250 Vac
Maximum load current	400 mA
Switching frequency	25 Hz maximum
Leakage current	1.8 mA
Voltage drop	8V maximum
Inrush	5 A maximum for 20 ms
Indicator LEDs	Two LEDs: One lights when power is ON, the other lights when output is ON
Operating temperature	–13 to 158 °F (–25 to 70 °C)
Enclosure ratings	NEMA 4, 4X, 6, 12, 13 (IP67)
Housing material	PBT resin

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.


E55 Limit Switch Style Sensors

Operating Voltage	Output	Terminal Models
Two-Wire Sensors		
35–250 Vac ⁽¹⁾	NO	L1 2 3 4 Load L2
	NC	$\begin{array}{c c} L1 & 1 & 2 \\ \hline 0 & 4 \\ \hline 0 & 4 \\ \hline 0 & 4 \\ \hline \end{array}$

Dimensions

Approximate Dimensions in Inches (mm)

E55 Limit Switch Style Sensors

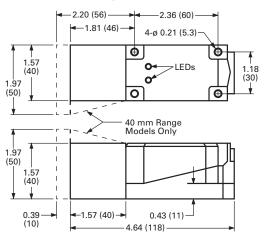

Note

^① Switches are shipped as NO configuration. Internal jumpers must be moved to program for NC.

3

Inductive Proximity Sensors

E51 Modular Limit Switch Style Sensors

E51 Modular Limit Switch Style Sensors

E51 Modular Limit Switch Style Sensors

Product Description

The E51 Inductive Proximity Sensor family from Eaton's Electrical Sector combines high performance with a familiar limit switch style housing. Modular, plug-in components provide application flexibility, ease of maintenance, less downtime and reduced inventory. Choose from two-wire sensors with AC/DC operation, or four-wire sensors in either AC or DC styles. Connection options include terminal, miniconnector or various lengths of cable.

Choose from standard sensors that detect all types of metallic targets. The next page provides more detail on these sensors.

Features

- Rugged construction is ideal for industrial environments
- Viton gaskets ensure a positive seal and high resistance to industry chemicals
- Direct replacement for worn out limit switches
- Sensor heads and bodies feature captive screws to eliminate loss
- All sensor heads include a selector switch to program output function to either NO or NC
- Sensor bodies feature bifurcated engagement prongs for a reliable connection when plugging into receptacle stabs

Contents

Engagement key between

sensor body and

receptacle prevents

improper assembly

both U.S. and DIN

Sensors accommodate

mounting dimensions

captive pressure plate

saddles for #18 to #12

is also included

control functions

٠

AWG wire. A green screw

identified ground terminal

Logic modules are available

to provide additional

Wiring terminals feature

Description	Page
E51 Modular Limit Switch Style Sensors	
Product Selection	
Standard Sensors—	
Assembled with Terminal Wiring	V8-T3-89
Standard Sensors—	
Assembled with Receptacles	V8-T3-90
Sensor Heads	V8-T3-90
Sensor Bodies	V8-T3-91
Logic Module	V8-T3-91
Receptacles	V8-T3-92
Compatible Connector Cables	V8-T3-93
Accessories	V8-T3-93
Technical Data and Specifications	V8-T3-94
Wiring Diagrams	V8-T3-94
Dimensions	V8-T3-95

Standards and Certifications UL Listed

- CSA Certified
- CE (where shown)



DANGER

THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include . self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

For the most current information on this product, visit our Web site: www.eaton.com

3

Product Selection

Standard Sensors—Assembled with Terminal Wiring

Standard E51 sensors feature long sensing ranges and a choice of top or side sensing heads. Alternate frequency units eliminate interference when mounted close to standard frequency units. Order sensors in component form, as assembled plug-in units, or in a sealed version where the sensor body is factory assembled to an epoxy filled receptacle with tamper-proof screws to ensure a lasting seal.

Assembled Sensor	Assembled Sensors—Standard (with Terminal Wiring)									
and the second s	Sensor Bo	ly and Recepta	cle		Two-Wire Sensors	Four-Wire S	ensors			
63	Come V	4.0		Operating voltage	20–264 Vac/dc	120 Vac		10–30 Vdc		
(C)	9			Output	NO or NC $^{\textcircled{1}}$	NO and NC c	omplementary	NO and NC cor	nplementary	
				Sensor body	E51SAL	E51SCL	E51SCN Accepts logic modules ^②	E51SPL PNP	E51SNL NPN	
	-32	-98.0		Receptacle ⁽³⁾	E51RA	E51RC	E51RCB	E51RN	E51RN	
Sensor Heads (1)	Sensing Range	Shielding	Frequency	Sensor Head Only Catalog Number	Assembled Sensors v Catalog Number	vith Head, Sens	sor Body and Rece	ptacle		
Top Sensing	Top Sensing									
	0.51 in (13 mm)	Shielded	Standard	E51DT1	E51ALT1 C€	E51CLT1	E51CNT1	E51PLT1 C	E51NLT1 CE	
	(13 1111)		Alternate	E51DT2	E51ALT2 C€	E51CLT2	E51CNT2	E51PLT2 C	E51NLT2 C€	
	0.94 in (24 mm)	Unshielded	Standard	E51DT5	E51ALT5 C€	E51CLT5	E51CNT5	E51PLT5 C	E51NLT5 C€	
	(24 1111)		Alternate	E51DT6	E51ALT6 C€	E51CLT6	E51CNT6	E51PLT6 C	E51NLT6 C€	
Side Sensing	Side Sen	sing								
	0.51 in (13 mm)	Shielded	Standard	E51DS1	E51ALS1 C€	E51CLS1	E51CNS1	E51PLS1 C	E51NLS1 CE	
	(13 mm)		Alternate	E51DS2	E51ALS2 C€	E51CLS2	E51CNS2	E51PLS2 C	E51NLS2 C€	
	0.94 in (24 mm)	Unshielded	Standard	E51DS5	E51ALS5 C€	E51CLS5	E51CNS5	E51PLS5 C	E51NLS5 CE	
	127 (1111)		Alternate	E51DS6	E51ALS6 (€	E51CLS6	E51CNS6	E51PLS6 (E51NLS6 (€	

Notes

① All sensor heads feature a programmable output selector switch for NO or NC operation. Operation is as follows:

For This Output Type:	Set Selector Position: "TARGET"	"NO TARGET"
NO	Target present	Target absent
NC	Target absent	Target present

⁽²⁾ Logic module must be ordered separately, see Page V8-T3-91. These sensor bodies are rated NEMA 4, 4X and 13.

③ Receptacles feature terminal wiring with a 1/2 in NPT thread at the conduit entrance. Other connection options are available:

Connection Option		Catalog Number	Code Suffix	Example
20 mm thread at the conduit entrance		—	20	E51ALT120
Mini-connector termination with epoxy filled receptacle, see Page V8-T3-92 for	Two-wire, 3-pin connector	CSMS3F3CY1602	P3	E51ALT1P3
additional receptacle options	Four-wire, 5-pin connector	CSMS5D5CY1602	P5	E51CLT1P5
Pre-wired cable with epoxy filled	8 ft long	_	S	E51ALT1S
receptacle	12 ft long	_	S12	E51ALT1S12
	20 ft long	_	S20	E51ALT1S20

E51 Modular Limit Switch Style Sensors

Standard Sensors—Assembled with Receptacles

Sensor body is attached to receptacle with tamper-proof screws.

Assembled Sensor Assembled Sensors – Standard (with Epoxy Filled Receptacles and Pre-wired Cables)

	Sensor Bas	e Type with 8 ft	Cable ^②								
A A A A A A A A A A A A A A A A A A A		T. F.Y.			Two-Wire S	ensors	Four-Wire Senso	rs			
2 3	2	The		Operating voltage	20–264 Vac/c	lc	120 Vac	10–30 Vdc NO and NC co	omplem	ientarv	
	-			Output	NO or NC ①		NO and NC complementary	PNP		NPN	
	Sensing			Sensor Head Only	Assembled	Sensors wit	h Head and Sensor Base	•			
Sensor Heads 🛈	Range	Shielding	Frequency	Catalog Number	Catalog Nur	nber					
Top Sensing	Top Sens	ing									
	0.51 in (13 mm)	Shielded	Standard	E51DT1	E51ALT16P	CE	E51CLT16P	E51PLT16P	C€	E51NLT16P	CE
	(10 mm)	,,	Alternate	E51DT2	E51ALT26P		E51CLT26P	E51PLT26P	CE	E51NLT26P	CE
	0.94 in (24 mm)	Unshielded	Standard	E51DT5	E51ALT56P	CE	E51CLT56P	E51PLT56P	CE	E51NLT56P	CE
	(24 mm)		Alternate	E51DT6	E51ALT66P	CE	E51CLT66P	E51PLT66P	(€	E51NLT66P	C€
Side Sensing	Side Sen	sing									
	0.51 in (13 mm)	Shielded	Standard	E51DS1	E51ALS16P	CE	E51CLS16P	E51PLS16P	C€	E51NLS16P	C€
			Alternate	E51DS2	E51ALS26P	CE	E51CLS26P	E51PLS26P	CE	E51NLS26P	CE
	0.94 in (24 mm)	Unshielded	Standard	E51DS5	E51ALS56P	CE	E51CLS56P	E51PLS56P	CE	E51NLS56P	CE
	127 11111)		Alternate	E51DS6	E51ALS66P	CE	E51CLS66P	E51PLS66P	(€	E51NLS66P	CE
	-									-	

Sensor Heads

Sensor Heads ①

	Sensing Range	Shielding	Frequency	Target Material	Catalog Number
sing	Top Sensing				
	0.51 in (13 mm)	Shielded	Standard	All metals	E51DT1
			Alternate		E51DT2
	0.94 in (24 mm)	Unshielded	Standard	All metals	E51DT5
			Alternate		E51DT6
ising	Side Sensing				
	0.51 in (13 mm)	Shielded	Standard	All metals	E51DS1
4			Alternate		E51DS2
	0.94 in (24 mm)	Unshielded	Standard	All metals	E51DS5
			Alternate		E51DS6

Notes

 $^{\odot}$ All sensor heads feature a programmable output selector switch for NO or NC operation. Operation is as follows:

For This Output Type:	Set Selector Position: "TARGET"	"NO TARGET"
NO	Target present	Target absent
NC	Target absent	Target present

⁽²⁾ Switch bases feature 8 ft of SOOW-A cable. Other connection options are available:

Connection Option ³	Suffix	Example
Mini-connector mounted on 3 ft (0.9m) pigtail cable	Т	E51ALT16PT
Mini-connector mounted to switch base	C	E51ALT16PC
Cable longer than 8 feet, add required length in 1 ft increments to listed catalog number—20 ft maximum	Length in ft	E51ALT16P12 for 12 ft

^③ See listing of compatible connector cables on Page V8-T3-93.

3.16

E51 Modular Limit Switch Style Sensors

Sensor Bodies

	Two-Wire S	Two-Wire Sensors							
	Operating Voltage	Output	Protection	Output Rating Continuous	Туре	Catalog Num	ber		
AC/DC	AC/DC								
	20–264 Vac/dc, 50/60 Hz	1 output, load powered, NO or NC, programmable from head; off state leakage current: <1.7 mA at 120 Vac/dc, <2.0 mA at 240 Vac	Latching short circuit and overload	0.5 A		E51SAL ⁽)	CE		

Operating Voltage Output Protection **Output Rating Continuous** Туре **Catalog Number** AC (E51SCN Shown) AC 120 Vac, 50/60 Hz E51SCL ① 1.0 A to 158 °F (70 °C), linearly 2 complementary outputs, line powered, _ NO and NC derated to 0.6 A at 176 °F (80 °C) 1.0 A to 113 °F (45 °C), linearly derated to 0.3 A at 176 °F (80 °C) E51SCN 23 _ DC DC 10-30 Vdc 2 complementary outputs, line powered, Reverse polarity 0.6 A to 104 °F (40 °C), linearly NPN E51SNL 1 NO and NC derated to 0.36A at 176 °F (80 °C) PNP E51SPL 1

Logic Module

Logic Module (for E51SCN Sensor Body Only)

	Туре	Description	Timing Range ④	Catalog Number			
Logic Module 6	ON and OFF delay	Adjustable delay between time object is sensed and time switch function occurs	0.15 to 15.0 seconds	E51MTB			
		Adjustable delay between time object leaves sensing field and time switch transfers back to non-sensing state					

Notes

Four-Wire Sensors

- ① This sensor body is available in a factory-sealed, non plug-in configuration (with 8-ft cable),
- add **6P** to listed catalog number. Example: E51SAL**6P**.
- ⁽²⁾ Sensor body is black. E51SCN sensor bodies are rated NEMA 4, 4X and 13.
- $\ensuremath{^{\textcircled{3}}}$ This sensor accepts logic modules, as seen in chart above.
- @ Repeatability of the timing cycle is $\pm 1\%$ at constant voltage, ambient temperature and reset time.
- ⁽⁶⁾ Reset time is 25 ms minimum. Rated NEMA 4, 4X and 13.

E51 Modular Limit Switch Style Sensors

Receptacles

Receptacles

	Description	Style	Details	Cable Length	Conduit Entrance 1/2 in NPT Catalog Number	20 mm Catalog Number
e Mount	Surface Mount					
	Conduit entrance, front or rear mounting	Two-wire, AC/DC	_	—	E51RA	E51RA20
2		Four-wire, AC	Gray	—	E51RC	E51RC20
1			Black ①	—	E51RCB	E51RCB20
E		Four-wire, DC	—	—	E51RN	E51RN20
onnector	Mini-Connector					
	Epoxy filled receptacle with pre-wired mini-connector	Two-wire, AC/DC	3-pin	_	E51RAP3 😟	_
		Four-wire, AC	5-pin	_	E51RCP5 😳	_
		Four-wire, DC	5-pin	_	E51RNP5 😯	_
with	Pigtail with Mini-Connector					
onnector	Epoxy filled receptacle with mini-connector mounted	Two-wire, AC/DC	3-pin	3 ft (0.9m)	E51RAPT3 🕑	_
-57	on 3 ft (0.9m) cable	Four-wire, AC	5-pin	3 ft (0.9m)	E51RCPT5 🕄	_
		Four-wire, DC	5-pin	3 ft (0.9m)	E51RNPT5 🕄	_
red Cable	Pre-Wired Cable					
1 mg	Epoxy filled receptacle with pre-wired 16 gauge,	Two-wire, AC/DC	3-conductor	8 ft (2.4m)	E51RAS	E51RA20S
311	yellow jacketed, type SOOW-A cable. Cable enters through hole threaded for conduit			12 ft (3.6m)	E51RAS12	_
~				20 ft (6m)	E51RAS20	—
		Four-wire, AC	5-conductor	8 ft (2.4m)	E51RCS	E51RC20S
				12 ft (3.6m)	E51RCS12	_
				20 ft (6m)	E51RCS20	_
		Four-wire, DC	5-conductor	8 ft (2.4m)	E51RNS	E51RN20S
				12 ft (3.6m)	E51RNS12	_
				20 ft (6m)	E51RNS20	_

Notes

See listing of compatible connector cables on Page V8-T3-93.

 $^{\scriptsize (1)}\,$ Black receptacle is for color compatibility with E51SCN sensor body.



Compatible Connector Cables

Standard C	ables 1					
Current Rating at 600 V	Voltage Style	Number of Pins	Gauge	Length	Pin Configuration/Wire Colors (Face View Female Shown)	Catalog Number
Micro-Style,	Straight Fem	ale				
13 A	_	3-pin	16 AWG	6 ft (2m)	1-Green 2-Black 3-White	CSMS3F3CY1602
10 A	AC/DC	4-pin, four-wire	16 AWG	6 ft (2m)	(4) (1) (3) (2) 3-Brown 4-White	CSMS4A4CY1602
8 A	_	5-pin	16 AWG	6 ft (2m)	$ \underbrace{ \begin{bmatrix} 1 \\ (5) \\ (4) \\ (4) \\ (3) \end{bmatrix} }^{1-White} \\ \begin{array}{c} 2-\text{Red} \\ 3-\text{Green} \\ 4-\text{Orange} \\ 5-\text{Black} \end{array} $	CSMS5D5CY1602

Accessories

E51	Modular	Limit	Switch	Style	Sensors
-----	---------	-------	--------	-------	---------

	Description	Catalog Number
Dne Hole	Universal Mounting Bracket	
0	One hole, includes mounting hardware, stainless steel	E51KH2
wo Holes	Two holes, includes mounting hardware, steel	E51KH4
0		
lachine Mounting racket	Machine Mounting Bracket	
	Zinc die cast construction	E50KH3
tand-Off Mounting	Stand-Off Mounting Bracket	
Bracket	Steel construction	E51KH3
emote Sensor Head	Remote Sensor Head Assembly	
	Permits mounting sensor head up to 3 ft (0.9m) from sensor body	E51KRM
	Dimensions, see Page V8-T3-95.	
	Note	

 $^{\textcircled{}}$ For a full selection of connector cables, see Tab 10, section 10.1.

Technical Data and Specifications

E51 Modular Limit Switch Style Sensors

Description	Specification
Output rating (NEMA D150)	
AC/DC models	0.5 A continuous
AC models	1 A continuous
DC models	0.6 A continuous
Protection	Latching short-circuit protection on two-wire AC/DC models; DC models: resettable short-circuit protection
Switching rate	AC models: 15 Hz; DC models: 50 Hz
Indicator LEDs	Lights when output is ON. One LED for each output
Alternate frequency	Standard and alternate frequencies allow side-by-side operation without interference
Enclosure material	Zinc die cast
Gasket material	Viton
Enclosure ratings	NEMA 3, 3S, 4, 4X, 6, 6P, 12 and 13 (IP67); E51SCN sensor body only: NEMA 4, 4X and 13
Hazardous locations ratings	
Class I	Division II—GRPS ABCD
Class II	Division II—GRPS F and G
Class III	Division 2
Temperature range	–13 to 158 °F (–25 to 70 °C)
Torque requirements	Switch body screws: 25–30 in-lbs; sensing head screws: 14–18 in-lbs
Vibration	10–55 Hz, 1 mm amplitude
Shock	30 g, 11 ms, 1/2 sine wave
Humidity	95% non-condensing
Burden current	<25 mA
OFF-state leakage	DC version: 120 µA; two-wire AC: 1.9 mA maximum; three-wire AC: 1.1 mA
ON-state leakage	<2.5 Vdc
Power-up delay	<150 ms

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.

E51 Modular Limit Switch Style Sensors

Operating Voltage	Output	Terminal and Cable Models	Mini-Connector Models (Face View Male Shown)
Two-Wire Sens	sors		
20–264 Vac or Vdc 50/60 Hz	NO or NC (NO shown, can be changed to NC using switch on sensor head)	White 1 Black Load L2 or +V 3 4 Green 1	$ \begin{array}{c} \begin{array}{c} L1 \text{ or } \\ (-) \end{array} \end{array} \\ \hline \end{array} \\ L2 \\ \hline \\ \hline \end{array} \\ \\ \hline \end{array} \\ \hline \end{array} \\ \hline \end{array} \\ \hline \\ \\ \hline \end{array} \\ \hline \\ \\ \hline \end{array} \\ \hline \\ \\ \hline \end{array} \\ \\ \hline \end{array} \\ \\ \\ \end{array} \\ \\ \hline \end{array} \\ \hline \\ \\ \hline \end{array} \\ \\ \hline \end{array} \\ \\ \\ \\$
Four-Wire Sen	sors		
120 Vac 50/60 Hz	NO and NC $^{\textcircled{0}}$	Red 1 Coad Black 3 Corange Coad White Coad Green L	L2 Load N.C. Load N.O. Load
10–30 Vdc	NO and NC NPN ①	+V Green 3 4 (-)	(-) (1) (5) (-) (2) (3) (-) (-) (-) (-) (-) (-) (-) (-) (-) (-
	NO and NC PNP ①	Red 1 Black +V 3 Corange Coad White Green 1 Green 1 (-)	(-) Load (2) (3) +V Load N.C

Note


^① Changing output switch on sensor head will reverse output function (NO becomes NC, and NC becomes NO).


Dimensions

Approximate Dimensions in mm [in]

E51 Modular Limit Switch Style Sensors

Standard Sensors

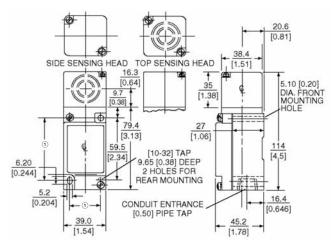


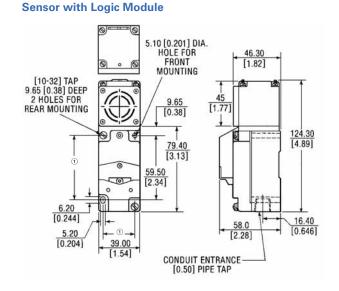


Accessories

Approximate Dimensions in Inches [mm]

Universal Mounting Bracket-One Hole



Universal Mounting Bracket-Two Holes

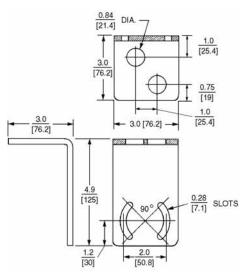


Note

① Can accommodate both U.S., 29.4 [1.16] x 59.5 [2.34] and DIN, 30 [1.18] x 60 [2.36], mounting dimensions are in mm [in].


3.16

Approximate Dimensions in mm [in]


Machine Mounting Bracket



Stand-Off Mounting Bracket



Remote Sensor Head Assembly

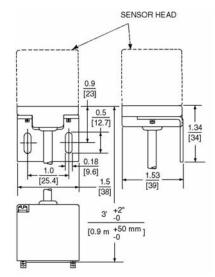

E51 Limit Switch Style, Factory Sealed 6P+ Sensors

3.17

3

E51 Limit Switch Style, Factory Sealed 6P+ Sensors



Contents

Description	Page
E51 Limit Switch Style, Factory Sealed 6P+ Sensors	
Product Selection	
Unitized Sensors	V8-T3-98
Compatible Connector Cables	V8-T3-98
Accessories	V8-T3-99
Technical Data and Specifications	V8-T3-99
Wiring Diagrams	V8-T3-100
Dimensions	V8-T3-100

E51 Limit Switch Style, Factory Sealed 6P+ Sensors

Product Description

E51 6P+ Inductive Proximity Sensors from Eaton's Electrical Sector are fully sealed, pre-wired and designed specifically to ensure reliability under the most adverse of environmental conditions. They have been proven to withstand the penetrating properties of dirt, dust, grit, extreme temperatures and humidity. The unitized design eliminates plug-in connections that can lead to reliability problems in rugged environments.

Features

- The one-piece body and sensing head are both epoxy filled to protect internal components from contamination
- The head is hard-wired to the sensor body to ensure trouble-free performance
- Choose from top and side sensing heads
- Side sensing heads can be rotated to any of four positions
- Mounting dimensions allow direct replacement of worn out limit switches
- Rugged zinc die cast construction withstands physical abuse
- Connection options include pre-wired cable, body mounted connector and pigtail connector



THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

For the most current information on this product, visit our Web site: www.eaton.com

E51 Limit Switch Style, Factory Sealed 6P+ Sensors

Product Selection


Unitized Sensors

Assembled Sensor Factory Sealed 6P+ Assembled Sensors

-	-			Two-Wire Sense	ors	Four-Wire Senso	rs	
27	10		Operating voltage	20–264 Vac/dc		120 Vac	10-30 Vdc	
	62					NO and NC	NO and NC compl	ementary
			Output	NO	NC	complementary	PNP	NPN
	Sensing			Assembled Sen	sor with Head, Sens	or Body and Recepta	cle	
S 2	Range	Shielding	Frequency ³	Catalog Number	r			
2	Top Sensing	l						
	0.51 in (13 mm)	Shielded	Standard	E51ALT16PU	E51BLT16PU	E51CLT16PU	E51PLT16PU	E51NLT16PU
			Alternate	E51ALT26PU	E51BLT26PU	E51CLT26PU	E51PLT26PU	E51NLT26P
	0.94 in (24 mm)	Unshielded	Standard	E51ALT56PU	E51BLT56PU	E51CLT56PU	E51PLT56PU	E51NLT56P
			Alternate	E51ALT66PU	E51BLT66PU	E51CLT66PU	E51PLT66PU	E51NLT66P
2	Side Sensin	g						
2	0.51 in (13 mm)	Shielded	Standard	E51ALS16PU	E51BLS16PU	E51CLS16PU	E51PLS16PU	E51NLS16P
			Alternate	E51ALS26PU	E51BLS26PU	E51CLS26PU	E51PLS26PU	E51NLS26P
	0.94 in (24 mm)	Unshielded	Standard	E51ALS56PU	E51BLS56PU	E51CLS56PU	E51PLS56PU	E51NLS56P
/			Alternate	E51ALS66PU	E51BLS66PU	E51CLS66PU	E51PLS66PU	E51NLS66P

Compatible Connector Cables

Standard Cables [®]

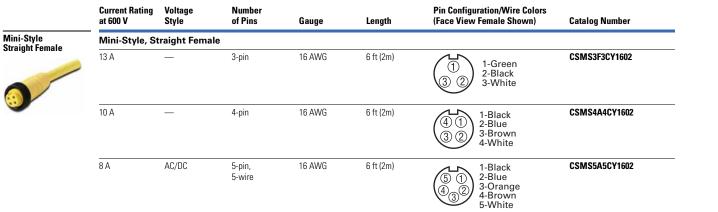

Notes

^① Switch bases feature 8 ft of SOOW-A cable. Other connection options are available:

Connection Option ⁽⁴⁾	Instructions	Example
Mini-connector mounted on 3 ft (0.9m) pigtail cable (3-pin for two-wire sensors; 5-pin for four-wire sensors)	Add the letter ${\bf T}$ before ${\bf U}$	E51ALT16PTU
Mini-connector mounted to switch base (3-pin for two-wire sensors; 5-pin for four-wire sensors)	Add the letter ${\bf C}$ before ${\bf U}$	E51ALT16PCU
Cable longer than 8 ft, add required length in 1 ft increments to listed catalog number—20 ft maximum	Add length in feet to end of catalog number	E51ALT16PU12®

② Sensor head is hard wired to sensor body and cannot be detached. Side sensing head can be unfastened and rotated to any of four positions.

③ Sensor heads feature color coded target symbols: Yellow for standard frequency; Green for alternate frequency.

^④ See listing of compatible connector cables above.

^⑤ For 12 ft.

 $^{\scriptsize (6)}$ For a full selection of connector cables, see Tab 10, section 10.1.

Accessories

	E51 Limit Switch Style, Factory Sealed 6P+ 0				
	Description	Catalog Number			
One Hole	Universal Mounting Bracket				
Â	Includes mounting hardware, stainless steel	E51KH2			
Two Holes	Includes mounting hardware, steel	E51KH4			
0					
Machine Mounting	Machine Mounting Bracket				
Bracket	Zinc die cast construction	E50KH3			
Stand-Off Mounting	Stand-Off Mounting Bracket				
Bracket	Steel construction	E51KH3			
	Dimensions, see Page V8-T3-100.				

Technical Data and Specifications

E51 Limit Switch Style, Factory Sealed 6P+

Description	Specification			
Output rating (NEMA D150)				
AC/DC models	0.5 A continuous			
AC models	1 A continuous			
DC models	0.6 A continuous			
Protection	Latching short-circuit protection on two-wire AC/DC and three-wire DC models			
Switching rate	AC models: 15 Hz; DC models: 50 Hz			
Indicator LEDs	Lights when output is ON. One LED for each output			
Alternate frequency	Standard and alternate frequencies allow side-by-side operation without interference			
Enclosure material	Cast metal			
Gasket material	Zinc die cast			
Enclosure ratings	NEMA 3, 3S, 4, 4X, 6, 6P, 12 and 13 (IP68)			
Temperature range	–13 to 158 °F (–25 to 70 °C)			
Torque requirements	Switch body screws: 25-30 in-lbs; sensing head screws: 14-18 in-lbs			
OFF-state leakage	DC version: 120 µA; two-wire AC: 1.9 mA maximum; three-wire AC: 1.1 mA			
ON-state leakage	<2.5 Vdc			


Note

1 Tor a full selection of connector cables, see Tab 10, section 10.1.

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.


E51 Limit Switch Style, Factory Sealed 6P+

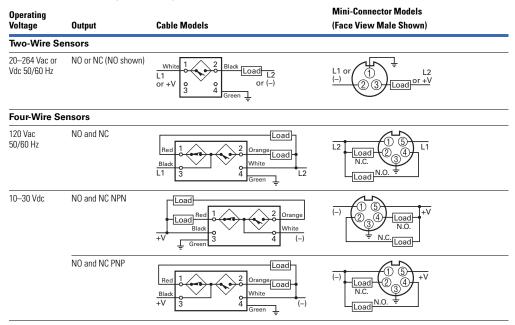

Dimensions

Approximate Dimensions in mm [in]

E51 Limit Switch Style, Factory Sealed 6P+

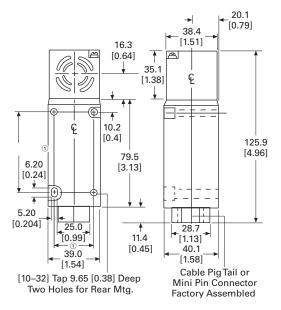

Note


 Can accommodate both U.S., 29.4 [1.16] x 59.5 [2.34] and DIN, 30 [1.18] x 60 [2.36], mounting dimensions.

E51 Limit Switch Style, Factory Sealed 6P+ Sensors


Approximate Dimensions in Inches [mm]

Accessories

Universal Mounting Bracket-One Hole




Universal Mounting Bracket-Two Holes

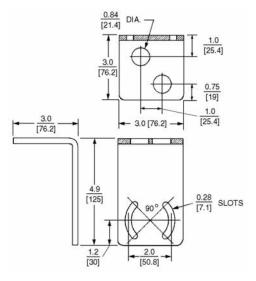

Approximate Dimensions in mm [in]

Machine Mounting Bracket



Note

^① Can accommodate both U.S., 29.4 [1.16] x 59.5 [2.34] and DIN, 30 [1.18] x 60 [2.36], mounting dimensions.

Stand-Off Mounting Bracket

