



RPS-450, RPS-475


Features

- Self Contained
- Environmentally Sealed Housing
- Range 5 to 30 or 10 to 72 in.
- Operates in Hostile Environments
- Narrow Sensing Beam
- Operating Voltage 120VAC (60 Hz)
- High Frequency
- N.O. N.C. Solid State Relay Outputs
- LED Indicator
- RPS-450 in Plastic Housing
- Potentiometer For Set-up
- RPS-475 in Stainless Steel Housing

The RPS-450, 475 are stud-mount, completely self-contained, 120VAC powered ultrasonic proximity sensors. These sensors are range or distance sensitive, enabling the sensors to detect objects only within the desired range and rejecting others. The RPS-450, 475 are solid state sensors including their solid state outputs, therefore having nearly unlimited life. The sound source operates in the ultrasonic spectrum and is therefore not heard. For initial setup purposes, a built in potentiometer and LED indicator are provided.



The LED indicator illuminates when the ultrasonic wave from the sensor is reflected back to the sensor within the preset range. These sensors provide precise proximity or level sensing regardless of color, density, or transparency. They are equally effective on liquid, metal, plastic, and glass targets.

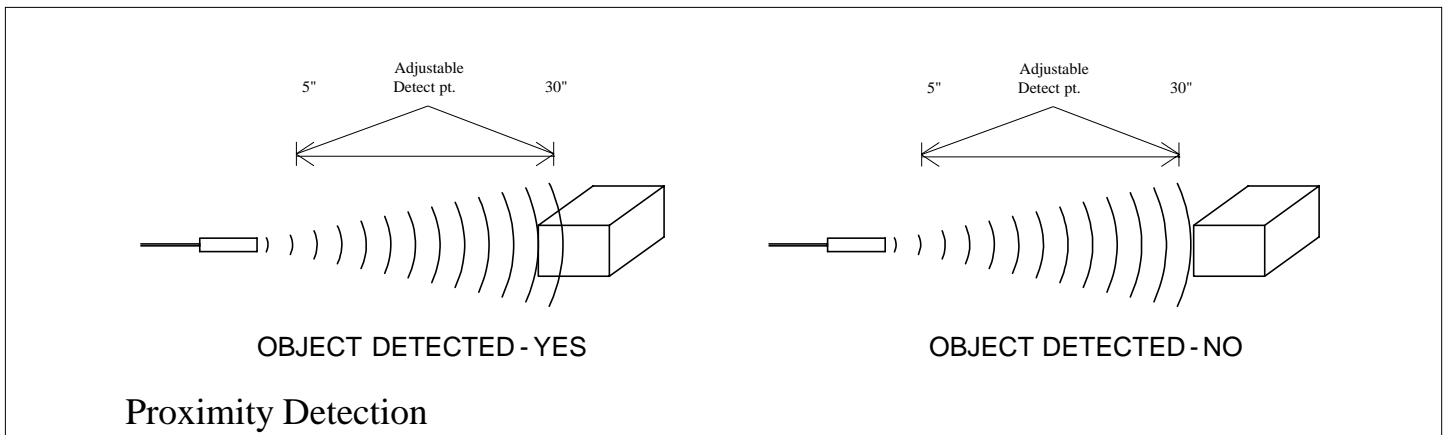

Proximity Detection

Proximity detection is the detection of an object in a given range. The detection range of the RPS-450, 475 is controlled by a potentiometer located on the rear of the sensor. Any

object within the desired range is detected, while objects out of range are ignored. The detect point is independent of size, material, or reflectivity of the object.

Specifications:

Operational Range:	Adjustable 5" to 30"
RPS-450	Adjustable 10" to 72"
RPS-475	Adjustable 10" to 72"
Power Input:	120VAC
Input Current:	30 Milliamps
Ambient Temperature:	0°C to 60°C or 32°F to 140°F
Humidity	0 - 95% Non-Condensing
Transducer Housing:	RPS-450 is Plastic RPS-475 is 303 Grade Stainless Steel
Transducer:	316 Grade Stainless Steel Sensing Face
Output: N.O., N.C.	Zero-Crossing Detection Isolation 2500 Vrms Off State Leakage - .001A Maximum Load Current - .005 to 1A Peak Current (One Cycle at 20A Maximum) Switching Voltage - 2 to 130VAC
Transducer Frequency:	5" to 30" 10" to 72" RPS-450: 212 kHz RPS-450: 150kHz RPS-475: 150kHz
Response Time:	5" to 30" 10" to 72" 30mS 60mS
Weight:	11 ounces





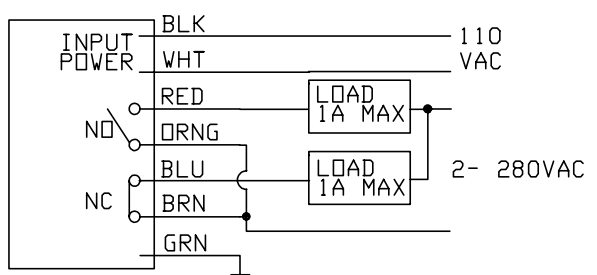


Figure:

- A - Angle of Tilt
- B - Beam Spread
- C - Wiring Diag.- Load conn. to Sensor Power
- D - Wiring Diag.- Load conn. to External Power
- E - Mounting Dimensions

NOTE: Consult Factory for "QD" option.

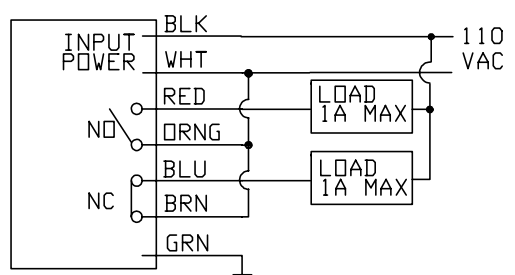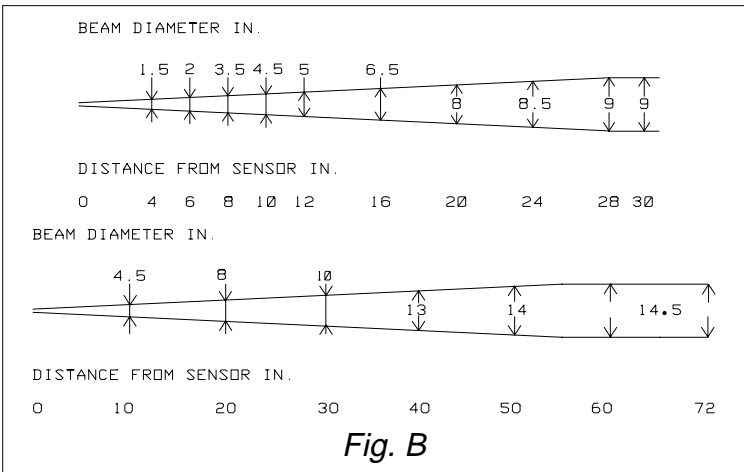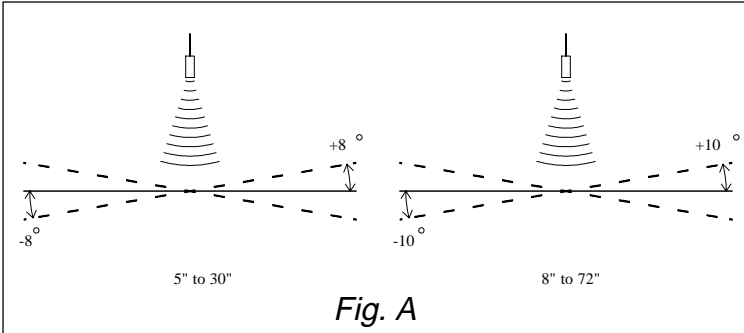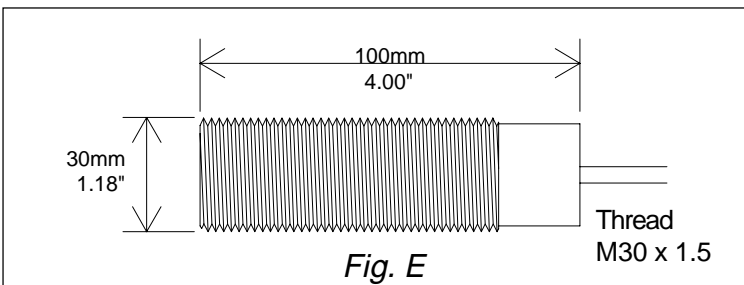

PART NUMBER	RANGE	OUTPUT
RPS-450-30	5" - 30"	N.O. N.C. Solid State Relays
RPS-450-72	10" - 72"	N.O. N.C. Solid State Relays
RPS-475-72	10" - 72"	N.O. N.C. Solid State Relays



(815) 338-5800 / FAX: (815) 338-5803

935 Dieckman Rd., Woodstock, IL 60098 USA
<http://www.migatron.com> e-mail: info@migatron.com