

PRODUCT FEATURES

- Eight 10/100BaseTX RJ-45 Ports
- Two SFP Gigabit ports
- -40°C to 70°C Operating temperature
- Onboard Temperature Sensor
- ESD and Surge Protection Diodes on all Ports
- Auto Sensing 10/100BaseTX, Duplex, and MDIX
- Store-and-forward Technology
- Rugged DIN-Rail Enclosure
- Redundant Power Inputs (10-49VDC)
- Configurable Bi-Color Fault Status LED

FULLY MANAGED FEATURES:

- SNMP v1, v2, v3 and Web Browser Management
- Configuration backup via Optional SD card
- Detailed Ring Map and Fault Location Charting
- N-Ring™ Technology with ~30ms Healing
- N-Link™ Redundant N-Ring Coupling
- RSTP - IEEE 802.1D
- N-View™ OPC Monitoring
- IGMP Auto configuration
- 802.1Q tag VLAN and Port VLAN
- 802.1p QoS, Port QoS, and DSCP
- EtherNet/IP™ CIP Messaging
- LLDP (Link Layer Discovery Protocol)
- Trunking
- Port Mirroring
- 802.1d, 802.1w, 802.1D RSTP
- DHCP Server, Option 82 relay, Option 61, IP Fallback
- Local Port IP Addressing
- Port Security—MAC Address Based



The N-TRON® 7010TX compact, fully managed industrial Ethernet switch is housed in a rugged industrial metal enclosure and offers a powerful combination of eight 10/100BaseTX copper ports and two SFP gigabit ports. It is ideally suited for use in industrial applications such as factory floor control networks, utilities, wind turbines, wastewater treatment facilities, rail car, intelligent traffic control and transportation applications, and any other application where high reliability, superior noise immunity, extreme ruggedness, and extended distance are required.

Remote Monitoring Options - Web browser and N-View OPC (OLE for process control) server software provides configuration and monitoring capability. N-View software easily combines with HMI software to monitor network traffic, alarms, and trends. SNMP is also available for switch link and status monitoring. Status LEDs are configurable to indicate power failure and N-Ring status.

N-Ring Technology - N-Ring technology provides expanded ring capacity, detailed fault diagnostics, and fast 30ms healing time. The ring manager validates the integrity of the ring using health check packets and quickly converts the ring to a linear topology within ~30ms when an error is detected. The health status of a ring comprised of all N-TRON fully managed switches may be monitored. A detailed ring map and fault location chart may be accessed by the ring manager's web browser or the OPC server. N-Link allows the linking of two N-Rings. Up to 250 fully managed N-TRON switches are supported in an N-Ring topology.

Industrial Specifications - High MTBF, extended shock and vibration specifications, wide operating temperature range and redundant power inputs are standard features.

Ease of Use - The 10/100BaseTX ports are auto sensing and auto configuring. Each copper port is automatically negotiated for maximum speed and performance by default, but can also be hard coded through the user interface. A high-speed processor allows wire speed capability on all 10/100BaseTX ports simultaneously.

7010TX Specifications

Switch Properties

| | |
|--------------------------|-------------------|
| Number of MAC Addresses: | 8000 |
| Aging Time: | Programmable |
| Latency Typical: | 2.6 μ s |
| Switching Method: | Store-and-Forward |

Case Dimensions

| | | |
|-----------------|--------|-----------|
| Height: | 4.3" | (11 cm) |
| Width: | 2.4" | (6.1 cm) |
| Depth: | 4.6" | (11.5 cm) |
| Weight (max): | 1.4lbs | (0.6 kg) |
| DIN-Rail Mount: | 35mm | |

Electrical

| | |
|--------------------------|------------------------|
| Redundant Input Voltage: | 10-49 VDC (Regulated) |
| Input Current (max): | 410mA max. @24VDC |
| BTU/hr: | 33.6@24VDC |
| N-TRON Power Supply: | NTPS-24-1.3 (1.3A@24V) |

Environmental

| | |
|------------------------|-------------------------------|
| Operating Temperature: | -40°C to 70°C |
| Storage Temperature: | -40°C to 85°C |
| Operating Humidity: | 5% to 95% (Non Condensing) |
| Operating Altitude: | 0 to 10,000 ft. |

Shock and Vibration (bulkhead mounted)

| | |
|--------------------|------------------------|
| Shock: | 200g @ 10ms |
| Vibration/Seismic: | 50g, 5-200Hz, Triaxial |

Reliability

| | |
|-------|------------------|
| MTBF: | >2 Million Hours |
|-------|------------------|

Network Media

| | |
|-------------|--------------------|
| 10BaseT: | \geq Cat3 Cable |
| 100BaseTX: | \geq Cat5 Cable |
| 1000BaseTX: | \geq Cat5e Cable |

SFP Gigabit Fiber Transceiver Characteristics

| Fiber Length | 550m for 50/125 μ m 275m @62.5/125 μ m* | 10km** | 40km** | 80km** |
|--------------------|----------------------------------------------------|----------|----------|----------|
| TX Power Min | -9.5dBm | -9.5dBm | -2dBm | 0dBm |
| RX Sensitivity Max | -17dBm | -20dBm | -22dBm | -24dBm |
| Wavelength | 850nm | 1310nm | 1310nm | 1550nm |
| Assumed Fiber Loss | 3.5 to 3.75 dB/km | .45dB/km | .35dB/km | .25dB/km |

* SX Fiber Optic Cable
** LX Fiber Optic Cable

Connectors

| | |
|---------------|--------------------------------------------------------|
| 10/100BaseTX: | Eight (8) RJ-45 Copper Ports |
| 1000BaseSX: | Up to Two (2) LC Duplex Gigabit Fiber Ports (optional) |

Recommended Wiring Clearance

| | | |
|--------|----|-----------|
| Front: | 4" | (10.2 cm) |
| Side: | 1" | (2.6 cm) |

Regulatory Approvals

- FCC Title 47, Part 15, Subpart B - Class A; ICES-003 - Class A
- GOST-R Certified, RoHS Compliant
- UL/cUL: UL 508 and ANSI/ISA-12.12.01-2007 Class I, Div 2, Groups A, B, C, and D; T4

Designed to comply with:

- IEEE 1613 for Electric Utility Substations
- NEMA TS1/ TS2 for Traffic control
- IEC-61850

Contact Information

N-TRON Corp.
820 S. University Blvd., Suite 4E
Mobile, AL 36609 USA
TEL: (251) 342-2164
FAX: (251) 342-6353
Website: www.N-TRON.com
Email: N-TRON_info@N-TRON.com

N-TRON Asia
Suite #: 2267, 22/F, One Lujiazui
68 Yin Cheng Road Center,
Pudong New Area
200120 Shanghai, P.R. China
TEL: +86 (0) 21 6194 6777
FAX: +86 (0) 21 6194 6699

N-TRON Europe GmbH
Alte Steinhäuserstr 19
6330 Cham / Zg Switzerland
TEL: +41 41 7406636
FAX: +41 41 7406637




REV 101130

7010TX Industrial Ethernet Switch Ordering Information

| | |
|-------------|-----------------------------------------------------------------------------------------|
| 7010TX | Eight 10/100BaseTX Ports, Two Optional Gigabit SFP Ports |
| NTSFP-TX | Optional SFP (Mini-GBIC) Transceiver with One 1000BaseT GB Copper Port |
| NTSFP-SX | Optional SFP (Mini-GBIC) Transceiver with One 1000BaseSX Multimode GB Fiber Optic Port |
| NTSFP-LX-ZZ | Optional SFP (Mini-GBIC) Transceiver with One 1000BaseLX Singlemode GB Fiber Optic Port |
| NTCD128 | Optional configuration card for backup / restore |
| NTPS-24-1.3 | N-TRON Power Supply - (1.3 Amp @ 24VDC) |
| CPMA-1 | Compact Panel Mount (factory installed option) |
| URMK | Universal Rack Mount Kit |

Where: ZZ = 10, 40, or 80 for GB Singlemode

If SFP Transceiver is not specified at the time of purchase, slots will remain blank with covers

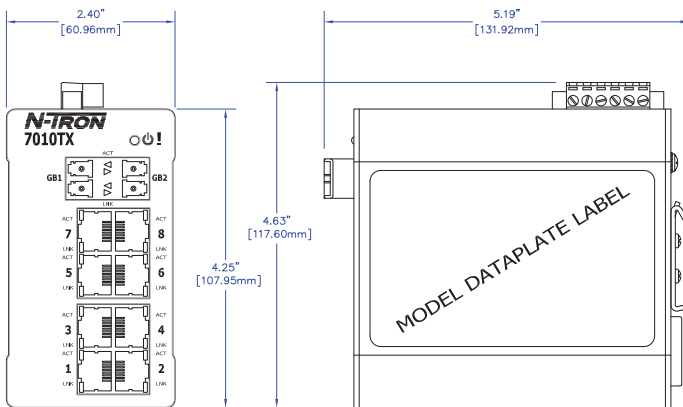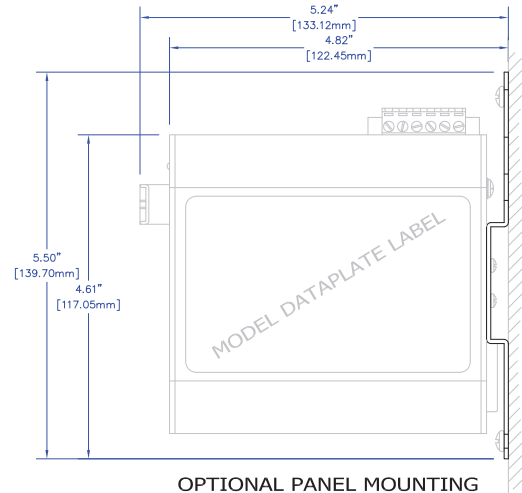

OPTIONAL PANEL MOUNTING