

Datasheet - AZM 170-11ZRK 110 VAC

Solenoid interlock / AZM 170



- Thermoplastic enclosure
- Double-insulated
- Compact design
- 90 mm x 84 mm x 30 mm
- 1 Cable entry M 20 x 1.5
- Interlock with protection against incorrect locking.
- Long life
- High holding force
- IDC method of termination
- Manual release


(Minor differences between the printed image and the original product may exist!)

Ordering details

Product type description	AZM 170-11ZRK 110 VAC
Article number	101136324
EAN code	4030661056357
eCl@ss	27-27-26-03

Approval


Approval



Classification

Standards	EN ISO 13849-1
B _{10d} Opener (NC)	2.000.000
Mission time	20 Years
notice	$MTTF_d = \frac{B_{10d}}{0,1 \times n_{op}}$ $n_{op} = \frac{d_{op} \times h_{op} \times 3600 \text{ s/h}}{t_{cycle}}$

Global Properties

Product name	AZM 170
Standards	EN 60947-5-1, BG-GS-ET-19
Compliance with the Directives (Y/N) 	Yes
Number of actuating directions	2 piece
Active principle	electromechanical
Duty cycle	Magnet 100 %
Materials	
- Material of the housings	Plastic, glass-fibre reinforced thermoplastic, self-extinguishing
- Material of the contacts	Silver
Housing coating	None
Weight	274 g

Mechanical data

Design of electrical connection	IDC method of termination
Cable section	
- Min. Cable section	1 x 0,75 mm ²
- Max. Cable section	1 x 1.0 mm ² , flexible
Mechanical life	> 1.000.000 operations
Emergency unlocking device (Y/N)	No
- bottom	
Manual release (Y/N)	Yes
Emergency release (Y/N)	No
Latching force	30 N
Positive break force	8.5 N
positive break travel	11 mm
Clamping force F _{max}	1000 N
Max. Actuating speed	2 m/s

Ambient conditions

Ambient temperature	
- Min. environmental temperature	-25 °C
- Max. environmental temperature	+60 °C
Protection class	IP67 to IEC/EN 60529




Electrical data

Design of control element	Normally open contact (NO), Opener (NC)
notice	change-over contact with double break, type Zb or 2 NC contacts, with galvanically separated contact bridges
Switching principle	Creep circuit element
Number of auxiliary contacts	1 piece
Number of safety contacts	1 piece
Power to unlock	Yes
Power to lock	No
Rated control voltage U _s	110 VAC
Power consumption	max. 10 W
Rated impulse withstand voltage U _{imp}	4 kV
Rated insulation voltage U _i	250 V
Thermal test current I _{the}	10 A
Utilisation category	AC-15: 230 V / 4 A, DC-13: 24 V / 4 A
Max. fuse rating	6 A gG D-fuse

ATEX

Explosion protection categories for gases	None
Explosion protected category for dusts	None

Miscellaneous data

Applications	<div>sliding safety guard,</div> <div>removable guard,</div> <div>hinged safety guard</div>
--------------	--

Dimensions

Dimensions of the sensor	
- Width of sensor	90 mm
- Height of sensor	84 mm
- Length of sensor	30 mm

notice


This type termination (IDC) method enables simple connetion of flexible conductors without the need for the use of conductor ferrules

Individual coding available on request


Manual release


- For manual release using M5 triangular key, available as accessory


Diagram

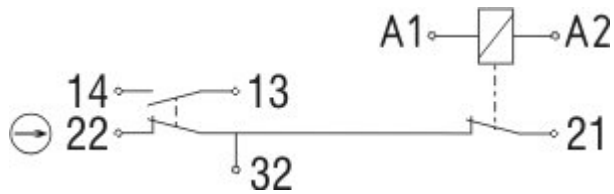



Note Diagram

 positive break NC contact


 active

 no active


 Normally-open contact


 Normally-closed contact

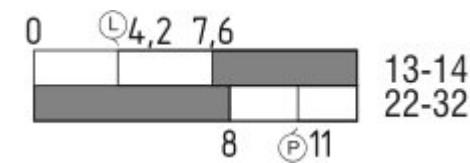


Switch travel diagram



Notes Switch travel diagram

 Contact closed

 Contact open

-  Setting range
-  Break point
-  Positive opening sequence/- angle
- VS** adjustable range of NO contact
- VÖ** adjustable range of NC contact
- N** after travel

Ordering suffix

The applicable ordering suffix is added at the end of the part number of the safety switch.	
Order example: AZM 170-11ZRK 110 VAC- 1637	
.... 1637	0,3 µm gold-plated contacts
... ST-2431	connector M12 , Individual solenoid monitoring

Ordering code

AZM 170(1)-(2)Z(3)K(4)-(5)-(6)-(7)	
(1)	
without	IDC method of termination
SK	Screw connection
(2)	
11	1 Normally open contact (NO) / 1 Opener (NC)
02	2 Opener (NC)
12/0.0	1 Normally open contact (NO), 2 Opener (NC) / -
(3)	
without	Latching force 5 N
R	Latching force 30 N
I	Individual coding
(4)	
without	Power to unlock
A	Power to lock
(5)	
without	cable gland
ST	Connector M12 x 1
ST-2431	Connector M12 x 1, Individual solenoid monitoring
(6)	
24VAC/DC	U _s 24 VAC/DC
110VAC	U _s 110 VAC
230VAC	U _s 230 VAC
(7)	
without	Manual release
2197	Manual release from side (Power to unlock)
1637	gold-plated contacts
AZM 170ST and AZM 170SK	
AZM 170ST-(1)Z(2)K(3)-(4)-(5)-024	
AZM 170SK-(1)Z(2)K(3)-(4)-(5)-024	
(1)	
11/11	1 Normally open contact (NO), 1 Opener (NC) / 1 Normally open contact

	(NO), 1 Opener (NC)
11/02	1 Normally open contact (NO), 1 Opener (NC) / 2 Opener (NC)
12/00	1 Normally open contact (NO), 2 Opener (NC) / -
12/11	1 Normally open contact (NO), 2 Opener (NC) / 1 Normally open contact (NO), 1 Opener (NC)
12/02	1 Normally open contact (NO), 2 Opener (NC) / 2 Opener (NC)
02/01	2 Opener (NC), - / 1 Opener (NC), -
02/10	2 Opener (NC), - / 1 Normally open contact (NO), -
(2)	
<i>without</i>	Latching force 5 N
R	Latching force 30 N
(3)	
<i>without</i>	Power to unlock
A	Power to lock
(4)	
1637	gold-plated contacts
(5)	
2197	Manual release for Power to unlock

Documents

Operating instructions and Declaration of conformity (fr) 670 kB, 01.07.2010

Code: mrl_azm170_fr

Operating instructions and Declaration of conformity (de) 923 kB, 24.02.2011

Code: mrl_azm170_de

Operating instructions and Declaration of conformity (it) 645 kB, 09.04.2010

Code: mrl_azm170_it

Operating instructions and Declaration of conformity (nl) 720 kB, 23.09.2010

Code: mrl_azm170_nl

Operating instructions and Declaration of conformity (en) 746 kB, 12.03.2010

Code: mrl_azm170_en

Operating instructions and Declaration of conformity (jp) 709 kB, 14.04.2011

Code: mrl_azm170_jp

Operating instructions and Declaration of conformity (pl) 590 kB, 11.02.2015

Code: mrl_azm170_pl

Operating instructions and Declaration of conformity (da) 582 kB, 07.08.2012

Code: mrl_azm170_da

Operating instructions and Declaration of conformity (es) 665 kB, 25.03.2010

Code: mrl_azm170_es

BG-test certificate (en) 236 kB, 10.12.2013

Code: z_m17p02

BG-test certificate (de) 238 kB, 10.12.2013


Code: z_m17p01

CCC certification (en) 596 kB, 23.06.2014
Code: q_371p02


CCC certification (cn) 607 kB, 23.06.2014
Code: q_371p03

Gost certification (ru) 2 MB, 07.07.2011
Code: q_az1p01


Images

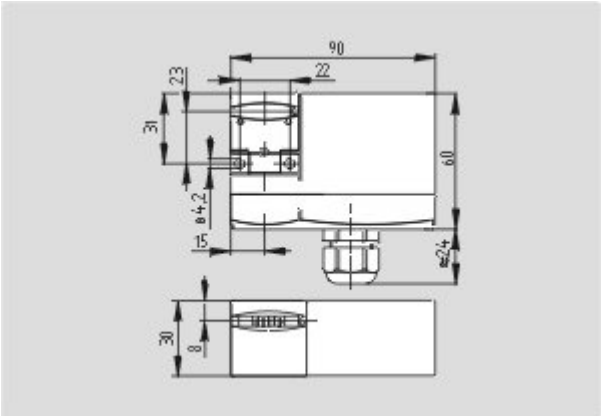

Dimensional drawing (basic component)

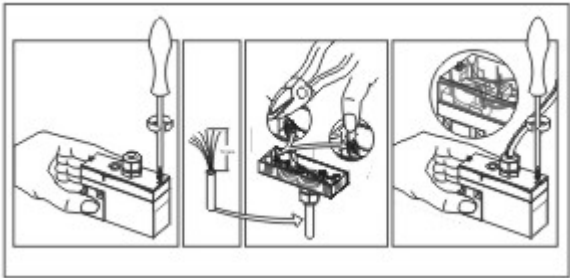

Assembly example

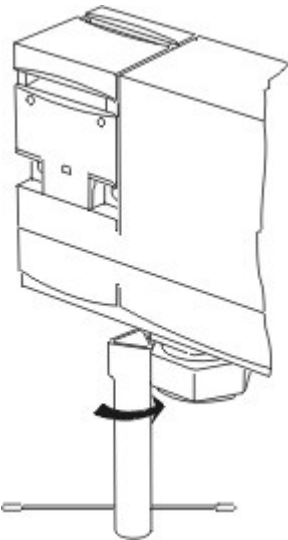

Detail photo

System components

Actuator



- 101122893 - AZ 17/170-B1**
- Particularly suitable for sliding doors



- 101137406 - AZ 17/170-B1-2245**
- Particularly suitable for sliding doors
 - Damps vibration on guard device



- 101122895 - AZ 17/170-B5**
- Particularly suitable for sliding doors



- 101139788 - AZ 17/170-B11**
- Particularly suitable for sliding doors



- 101139789 - AZ 17/170-B15**
- Particularly suitable for sliding doors



- 101123391 - AZM 170-B6**
- Particularly suitable for hinged guards
 - For very small actuating radii
 - The direction of actuation can be selected by applicable insertion of the insert

Accessories



- 101208493 - AZM 170-B CENTERING GUIDE**
- for AZ 17 and AZM 170

- 101100887 - TRIANGULAR KEY TK-M5**
- For manual release using M5 triangular key, available as accessory



- For maintenance, installation, etc.

Connector



A-K4M12

- Pre-wired cable
- 4-pole



S-K4M12

- Connector without cable
- 4-pole

K.A. Schmersal GmbH & Co. KG, Möddinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 19.08.2015 - 01:26:40h Kasbase 3.1.12.F.64l