


Datasheet - CSS-T-A

Accessories SD interface / SD junction boxes M12



Preferred typ

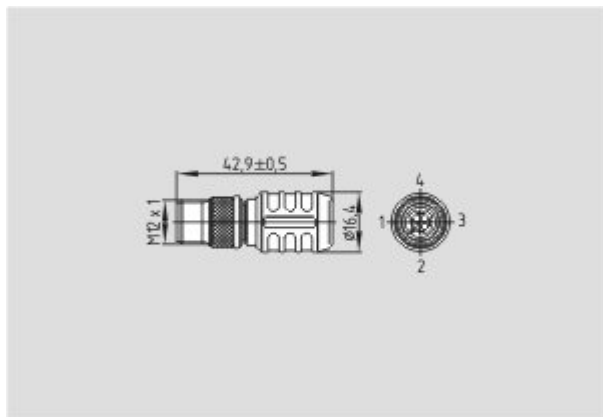

(Minor differences between the printed image and the original product may exist!)

- Accessories for series-wiring with serial diagnostics
- for CSS 34

Ordering details

Product type description	CSS-T-A
Article number	101190025
EAN code	4030661355900

Global Properties

Product name	Abschlussstecker für T-Adapter
Connector	1 x Connector, 5-pole
Design	straight
Weight	15 g
Recommended combinations	Sensors

Mechanical data

termination	M12
Bolting device	Screw locking

Ambient conditions

Ambient temperature	
- Min. environmental temperature	-25 °C
- Max. environmental temperature	+70 °C

Electrical data

Rated operating voltage U_e	30 VDC
Operating current I_e	2 A
Fuse rating for the operating voltage	2 A

Dimensions


Dimensions

- Width	16.5 mm
- Height	16.5 mm
- Length	43 mm






notice

For the wiring, M12 cable extensions can be used. The voltage drop (due to the cable length, cable section, voltage drop per sensor) should be taken into account, as it reduces the maximum number of sensors that can be wired in series.

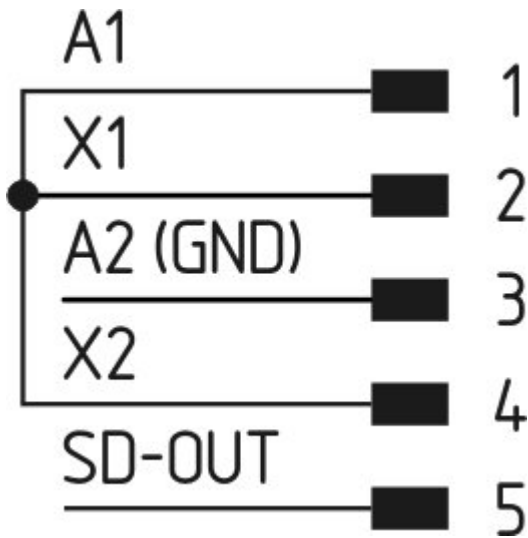Diagram



Note Diagram


-  positive break NC contact
-  active
-  no active
-  Normally-open contact
-  Normally-closed contact

Documents

Mounting and wiring instructions (de, en, fr) 49 kB, 18.06.2009

Code: m_cstp01

Images

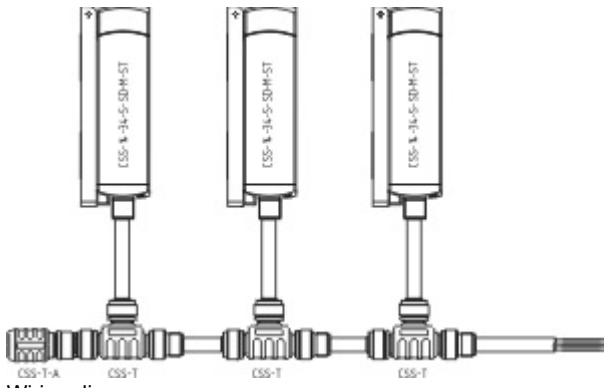

System components

Connector



V-SK8M12

- Interconnector
- 8-pole

K.A. Schmersal GmbH & Co. KG, Möddinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 12.02.2013 - 21:50:15h Kasbase 2.2.2 DBII

Image

Image
et=sS