

**7/8", 1" & 1 1/8" minifast® Cordset Part Number Key**

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.



**7/8", 1" & 1 1/8" minifast Cordset**

R = straight  
W = right angle

**Gender**

K = female connector, female threads  
S = male connector, male threads  
Y = male connector, female threads

**Coupling Nut Material**

(blank) = nylon  
M = nickel plated brass  
V = stainless steel (hex on 1", 1 1/8" and knurl on 7/8")  
VH = stainless steel (hex on 7/8")

**Insertion Point of Extension Cable 2nd Prefix\***

\* Male connector listed 1st, female connector 2nd  
Example: **RSM RKM 40-2M**

**Varieties**

(blank) = PVC jacket  
/S90 = PUR jacket  
/S90-SP = PUR coil cord  
/S101 = **flexlife®-20**, high flex cable  
/S529 = yellow PUR jacket, braided shield, PVC inner jacket  
/S600 = CPE, rubber jacket  
/S824 = yellow PLTC  
/S1077 = silicone tubing  
/S1094 = TPE mold body, TPE **weldlife®** cable and teflon coated coupling nut  
/S1095 = TPE mold body  
/S1587 = TPE, **weldlife**  
/XOR/S620 = irradiated PVC, weld resistance  
/S .. = consult factory, special  
/CS .. = consult factory, special

**Length in Meters**

**Number of Wires / AWG / Color Codes**


- 20 = 2x18 AWG BN, BU
- 26 = 2x16 AWG WH, BK
- 28A = 2x18 AWG WH, BK
- 30 = 3x18 AWG GN/YE, BN, BU
- 31 = 3x18 AWG BK, BN, BU
- 35 = 3x16 AWG GN, RD/BK, RD/WH
- 36 = 3x16 AWG GN, BK, WH
- 38A = 3x18 AWG GN, BK, WH
- 311 = 3x18 AWG RD/BK, RD/WH, GN
- 40 = 4x18 AWG BN, WH, BU, BK
- 46 = 4x16 AWG BK, WH, RD, GN
- 47 = 4x16 AWG BN, WH, BU, BK
- 48A = 4x18 AWG BK, WH, RD, GN
- 50 = 5x18 AWG BK, BU, GN/YE, BN, WH
- 55 = 5x16 AWG RD/WH, RD/BU, GN, RD/OG, RD/BK
- 56 = 5x16 AWG WH, RD, GN, OG, BK
- 58A = 5x18 AWG WH, RD, GN, OG, BK
- 511 = 5x18 AWG RD/WH, RD/BU, GN, RD/OG, RD/BK
- 61 = 6x18 AWG GN, WH, BU, CY, YE, BN
- 66 = 6x16 AWG WH, RD, GN, OG, BK, BU
- 68A = 6x18 AWG WH, RD, GN, OG, BK, BU
- 6B6 = 6x16 AWG OG, BU, BK, WH, RD, GN
- 76 = 7x16 AWG WH/BK, BK, WH, RD, OG, BU, GN
- 86 = 8x16 AWG OG, BU, WH/BK, BK, WH, RD, GN, RD/BK
- 96 = 9x16 AWG OG, BU, RD/BK, GN/BK, WH, RD, GN, WH/BK, BK
- 106 = 10x16 AWG OG, BU, WH/BK, RD/BK, GN/BK, OG/BK, RD, GN, BK, WH
- 126 = 12x16 AWG OG, BU, WH/BK, RD/BK, GN/BK, OG/BK, BU/BK, BK/WH, GN, RD, WH, BK

\_\_\_A Metal Clad Cable (18 AWG straight only)  
\_\_\_D Smooth Plug Body (16 AWG straight only)


## 7/8", 1" & 1 1/8" minifast® Cordset Part Number Key

### Extension Examples:


Hybrid connector extensions also available. Consult factory.




R K M 4.4T - 2 - R S C 40




R S M R K M 30 - 4M /S..

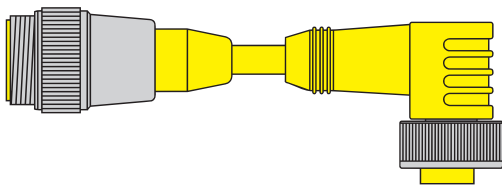

R S M W K M 30 - 4M /S..

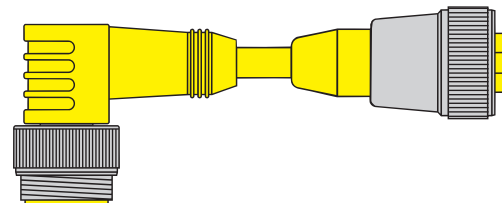

W S M R K M 30 - 4M /S..

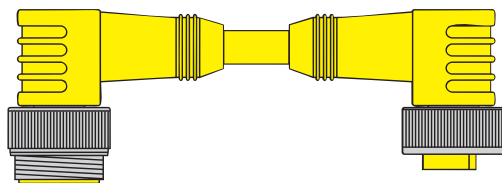

W S M W K M 30 - 4M /S..

minifast