M8 *picofast* ® Cordset Part Number Key
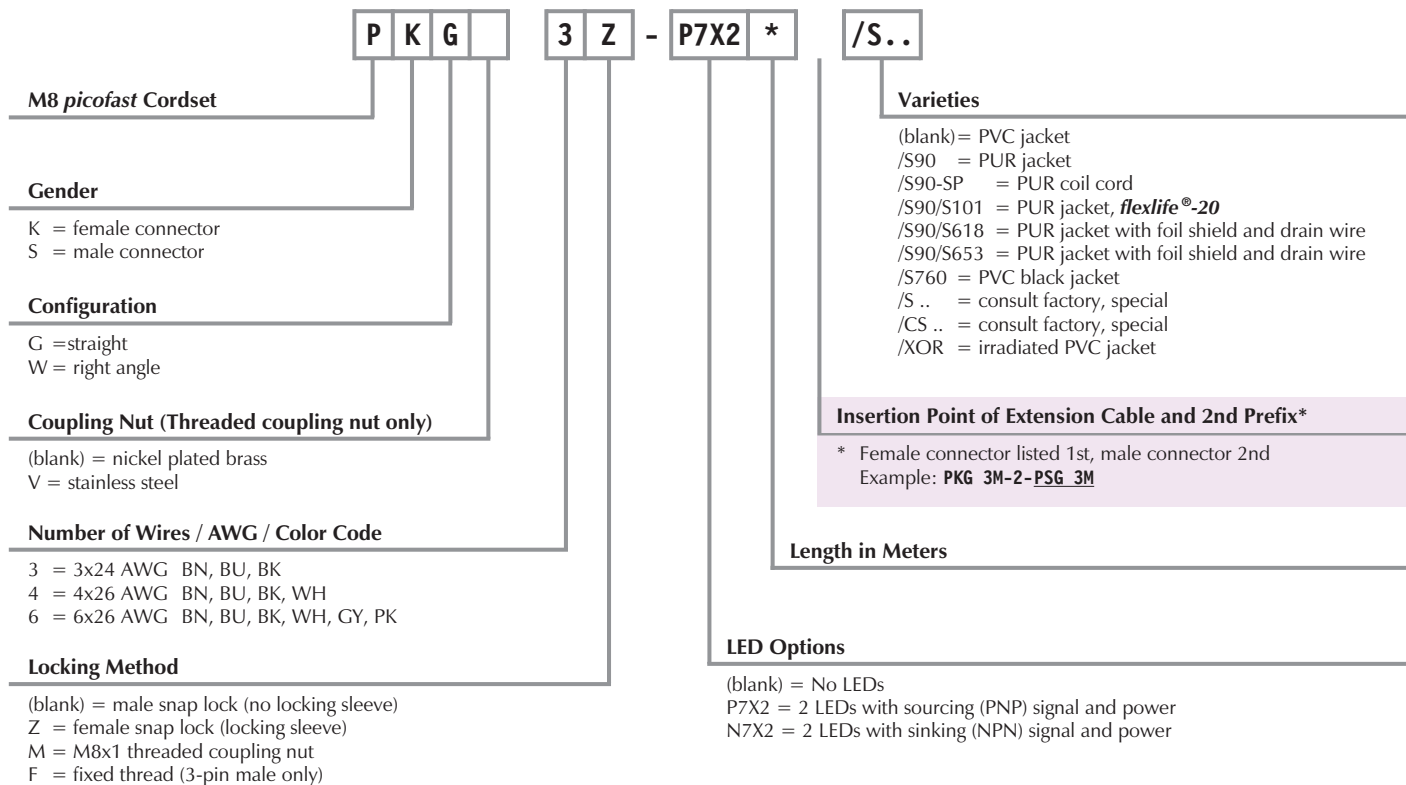
Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

| P | K | G | | 3 | Z | - | P7X2 | * | | /S.. |

M8 *picofast* Cordset

Gender

K = female connector
S = male connector

Configuration

G = straight
W = right angle

Coupling Nut (Threaded coupling nut only)

(blank) = nickel plated brass
V = stainless steel

Number of Wires / AWG / Color Code

3 = 3x24 AWG BN, BU, BK
4 = 4x26 AWG BN, BU, BK, WH
6 = 6x26 AWG BN, BU, BK, WH, GY, PK

Locking Method

(blank) = male snap lock (no locking sleeve)
Z = female snap lock (locking sleeve)
M = M8x1 threaded coupling nut
F = fixed thread (3-pin male only)

Varieties

(blank)	= PVC jacket
/S90	= PUR jacket
/S90-SP	= PUR coil cord
/S90/S101	= PUR jacket, *flexlife*®-20
/S90/S618	= PUR jacket with foil shield and drain wire
/S90/S653	= PUR jacket with foil shield and drain wire
/S760	= PVC black jacket
/S ..	= consult factory, special
/CS ..	= consult factory, special
/XOR	= irradiated PVC jacket

Insertion Point of Extension Cable and 2nd Prefix*

* Female connector listed 1st, male connector 2nd
Example: **PKG 3M-2-PSG 3M**

Length in Meters

LED Options

(blank) = No LEDs
P7X2 = 2 LEDs with sourcing (PNP) signal and power
N7X2 = 2 LEDs with sinking (NPN) signal and power

Extension Examples:

Hybrid connector extensions also available. Consult factory.

| R | K | C | | 4.4 T | - | 2 | - | P | K | G | | 4 M |

| P | K | G | | 3 M | - | 2 | - | P | S | G | | 3 M |

| P | K | G | | 3 M | - | 2 | - | P | S | W | | 3 M |

| P | K | W | | 3 M | - | 2 | - | P | S | G | | 3 M |