

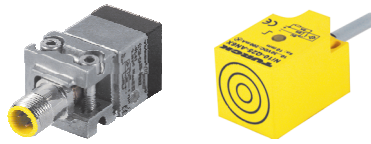
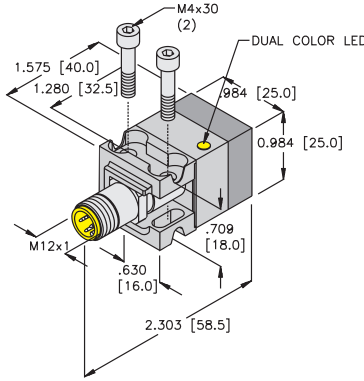


Inductive Rectangular Sensors

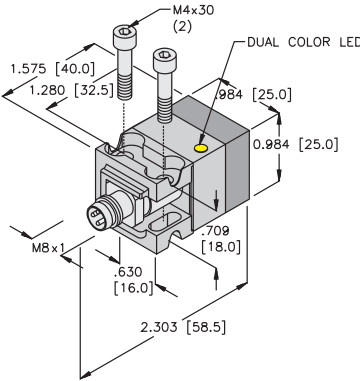

Housing Style - Rectangular	Part Number	ID Number	Features	Embeddable	Sensing Range (mm)	Output
25 mm - Embeddable, eurofast® Quick Disconnect 	Bi 10U-CA25-AP6X2-H1141	M1625631	<i>Uprox</i>	•	10	3-Wire DC PNP
25 mm - Embeddable, picofast® Quick Disconnect 	Bi 10U-CA25-AP6X2-V1131	M1625632	<i>Uprox</i>	•	10	3-Wire DC PNP
25 mm - Nonembeddable, Potted-In Cable 	Ni 10-Q25-AN6X	M4652330			10	3-Wire DC NPN
	Ni 10-Q25-AP6X	M4652225			10	3-Wire DC PNP

For detailed sensor specifications see Section M.
Normally Closed versions available upon request, consult factory.

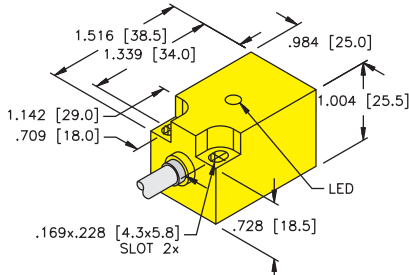

Voltage	Switching Freq. (Hz)	Operating Current (mA)	Operating Temp. (°C)	Protection	Housing	Front Cap/Face	Power LED	Output LED	Mating Cord/ Cable Length/Jacket	Wiring Diagram #	Wiring Diagrams
10-30 VDC	250	≤200	-30 to +85	IP 67	AL	TP	GN	YE	RK 4T-*	1	<p>Diagram 1</p> <p>Diagram 2</p> <p>Diagram 3</p> <p>Diagram 4</p>
10-30 VDC	250	≤200	-30 to +85	IP 67	AL	TP	GN	YE	PKG 3M-*	2	<p>Diagram 3</p> <p>Diagram 4</p>
10-30 VDC	2000	≤200	-25 to +70	IP 67	PBT	PBT	N/A	YE	2M/PVC	3	
10-30 VDC	2000	≤200	-25 to +70	IP 67	PBT	PBT	N/A	YE	2M/PVC	4	

Rectangular

For material descriptions see page M36.