
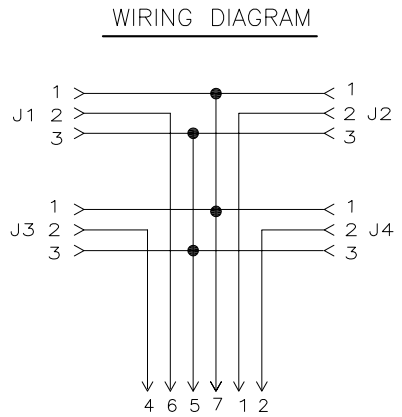


SPECIFICATIONS	
MATING PLUG CABLE	CKRM 12-6-*
HOUSING MATERIAL	ALUMINUM ALLOY
HOUSING FINISH/COLOR	EPOXY/BLACK
CONTACT CARRIERS	TPU
CONTACTS	GOLD-PLATED BRASS
OPERATING VOLTAGE	250 VAC/ 300 VDC
OPERATING CURRENT	4.0 A PER PORT, 7.0 A TOTAL
PROTECTION CLASS to DIN 40050	IP 67, ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to 80°C (-22°F to 176°F)

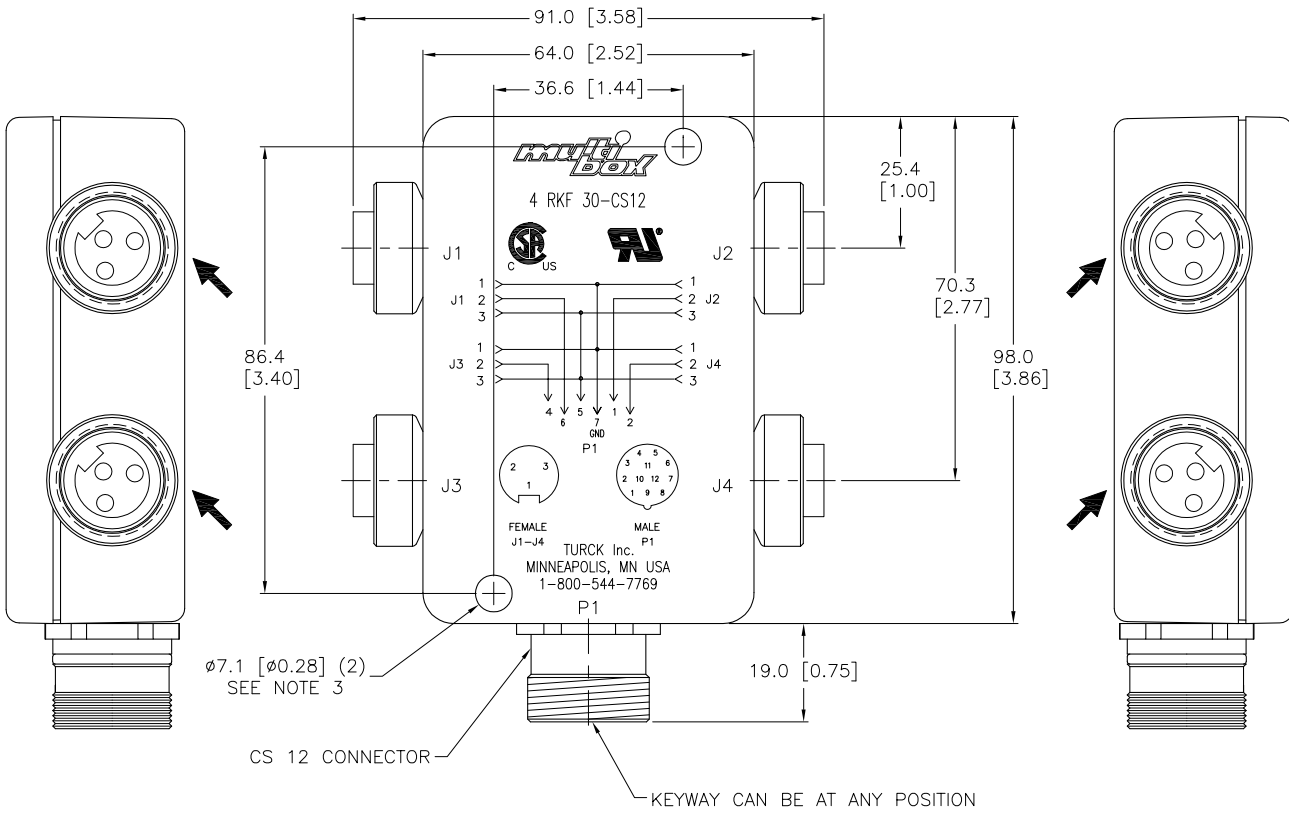

SOURCE DRAWING - FOR REFERENCE ONLY

- NOTES:
- USE MATING CORDSET CKRM 12-6-*. (* = CABLE LENGTH IN METERS)
 - BOX HEIGHT IS 34.5mm NOMINAL.
 - CLEARANCE HOLE FOR 1/4-20 MOUNTING SCREWS (NOT INCLUDED).

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		<p>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</p>	
1. 2. 3. 4.				DRFT	CBM	DATE	11/04/98
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DSGN	JAL	SCALE	1=1.5
SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
FINISH		MILLIMETER [INCH]		IDENTIFICATION NO.		REV	
SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING		U2361-2			
I DRAWING PROCESSED AS PART OF ECO 33971		CBM 04/07/11 33971		FILE: U2361-2		SHEET 1 OF 1	
REV	DESCRIPTION	BY	DATE	ECO NO.			