
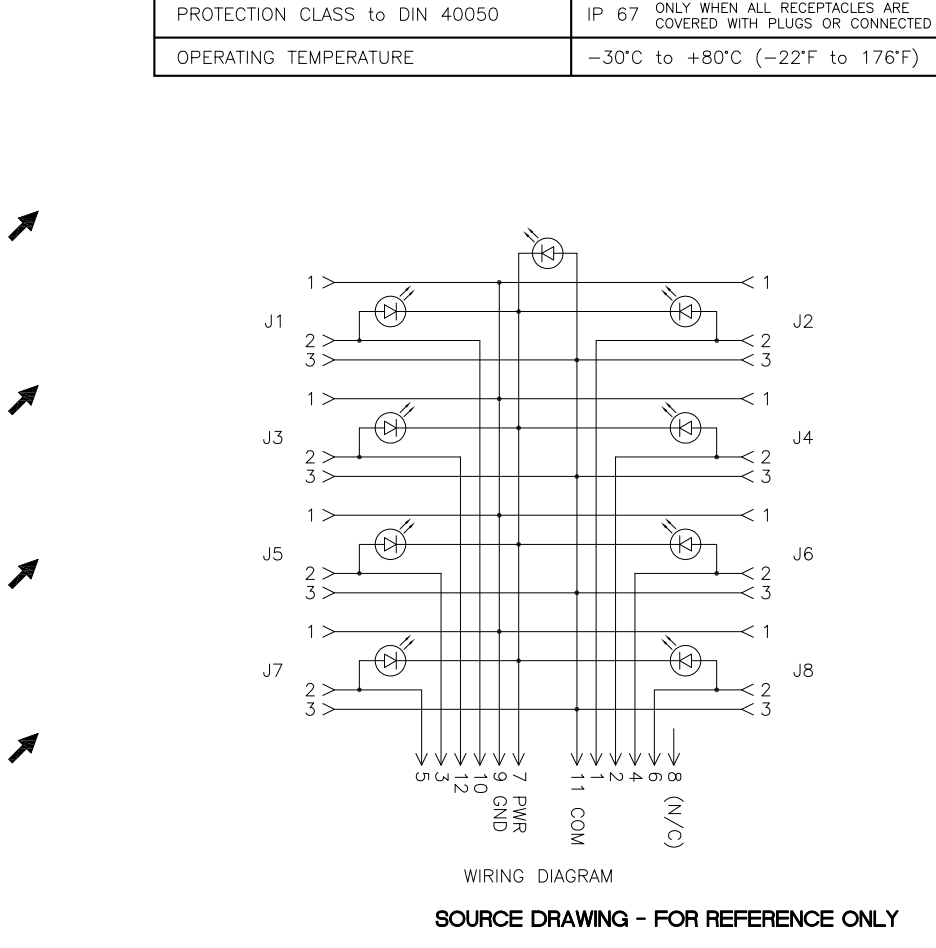


SPECIFICATIONS	
HOUSING MATERIAL	ALUMINUM ALLOY
HOUSING FINISH/COLOR	EPOXY/BLACK
RECEPTACLE HOUSING MATERIAL/PLATING	BRASS/NICKEL
CONTACT CARRIERS	TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	40 VAC-120 VAC
OPERATING CURRENT	4.0 A Per PORT, 7.0 A TOTAL
PROTECTION CLASS to DIN 40050	IP 67 ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to +80°C (-22°F to 176°F)

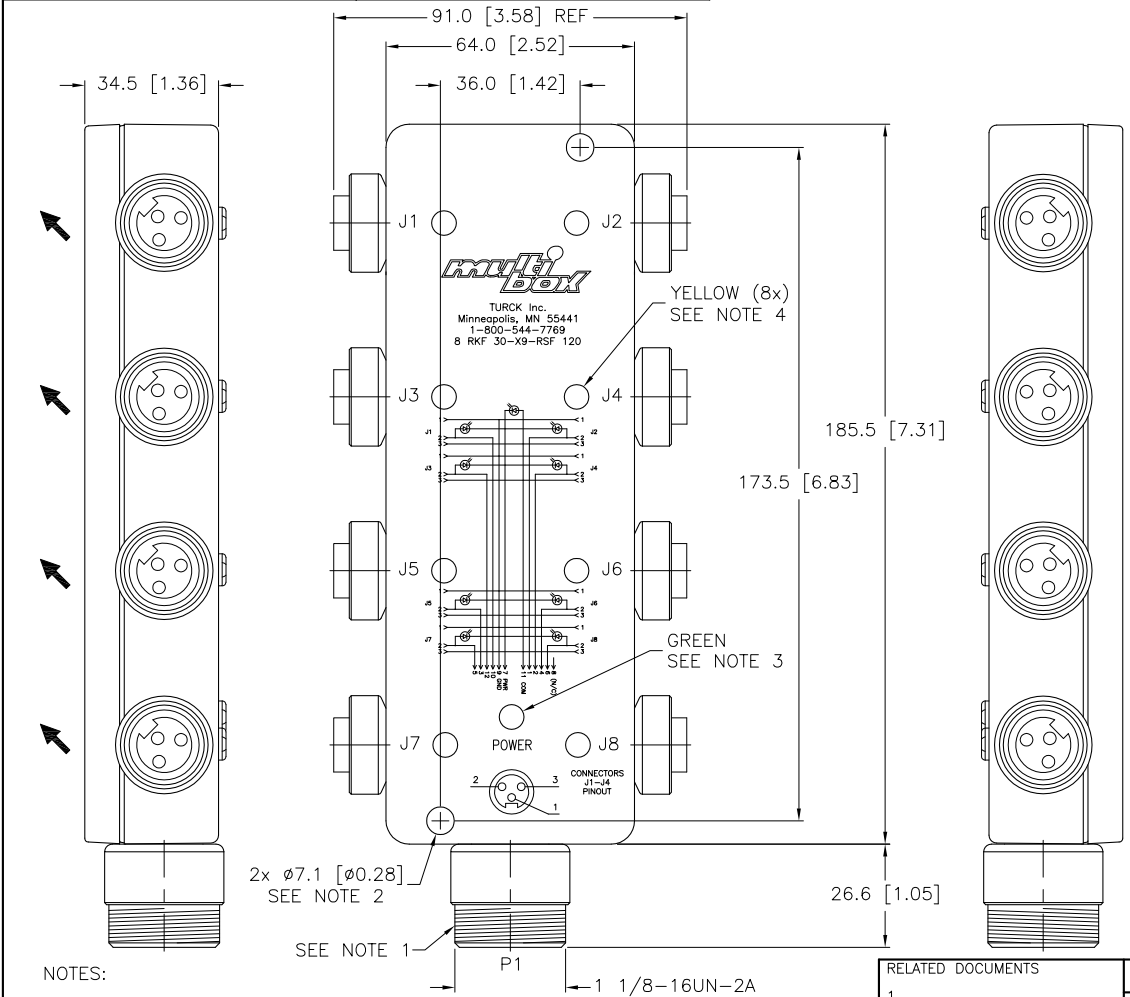

WIRING DIAGRAM  
SOURCE DRAWING - FOR REFERENCE ONLY

- NOTES:
1. USE MATING CORDSET RKM 126-\*M (\* = CABLE LENGTH IN METERS).
  2. CLEARANCE HOLE FOR 1/4-20 MOUNTING SCREWS (NOT SUPPLIED).
  3. GREEN LED POWER INPUT TO MODULE WHEN LIT.
  4. YELLOW LED (8). CIRCUIT IS ENERGIZED WHEN LIT.
  5. AT 24 VAC THE LEDS MAY NOT BE AS BRIGHT AS NORMAL.

C	UPDATE VOLTAGE, CURRENT, TEMPERATURE SPECIFICATIONS	KMY	11/04/11	36947
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS
1. 2. 3. 4.
MATERIAL
SEE SPECIFICATIONS
FINISH
SEE SPECIFICATIONS

3RD ANGLE PROJECTION
ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY
CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	
DRFT	RWC
DATE	05/25/06
APVD	SCALE 1=2.0
UNIT OF MEASUREMENT	
MILLIMETER [ INCH ]	
DO NOT SCALE THIS DRAWING	

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
<b>TURCK INC</b> High Technology Sensors and Automation Controls	
DESCRIPTION	8 RKF 30-X9-RSF120
IDENTIFICATION NO.	U0949-29
REV	C
FILE: U0949-29	SHEET 1 OF 1