

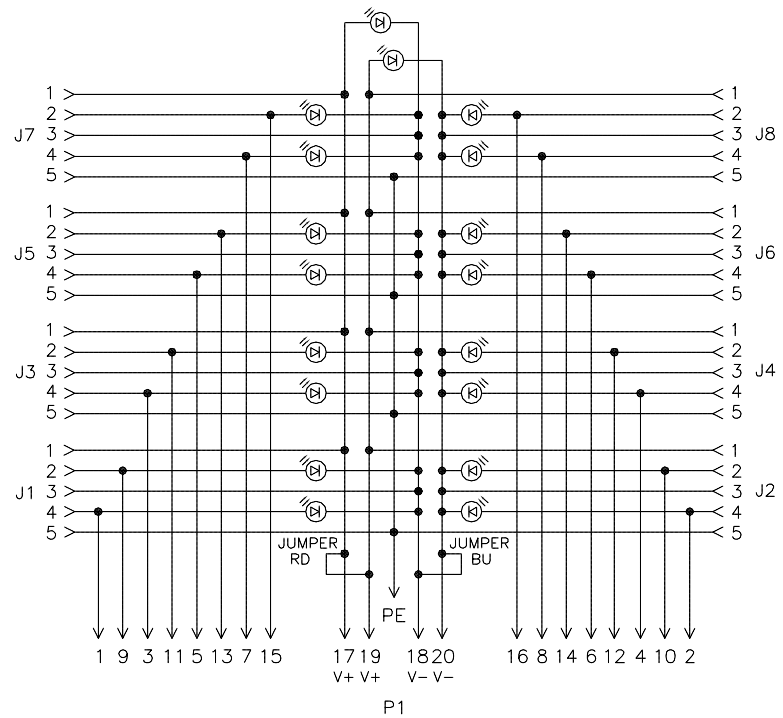


SPECIFICATIONS	
HOUSING MATERIAL/COLOR	PBT (UL 94 VO)/BLACK
RECEPTACLE THREADING MATL./PLATING	BRASS/NICKEL
CONTACT CARRIERS/COLOR	PBT/BK
CONTACTS MATERIAL/PLATING	BRASS/GOLD
SEALING, RECEPTACLE	VITON O-RING
SEALING, HOUSING	TPU FOAM
TERMINATION METHOD	THREAD-CLAMPING (FIELD WIRABLE)
MAX. WIRE SIZE [AWG]	16 AWG
OPERATING VOLTAGE [V]	10-30 V
OPERATING CURRENT [A]	2.0 A PER SIGNAL, 10.0 A TOTAL or 8.0 A PER SUPPLY
PROTECTION CLASS to DIN 40050	IP 68 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-20°C to +90°C (-4°F to +194°F)

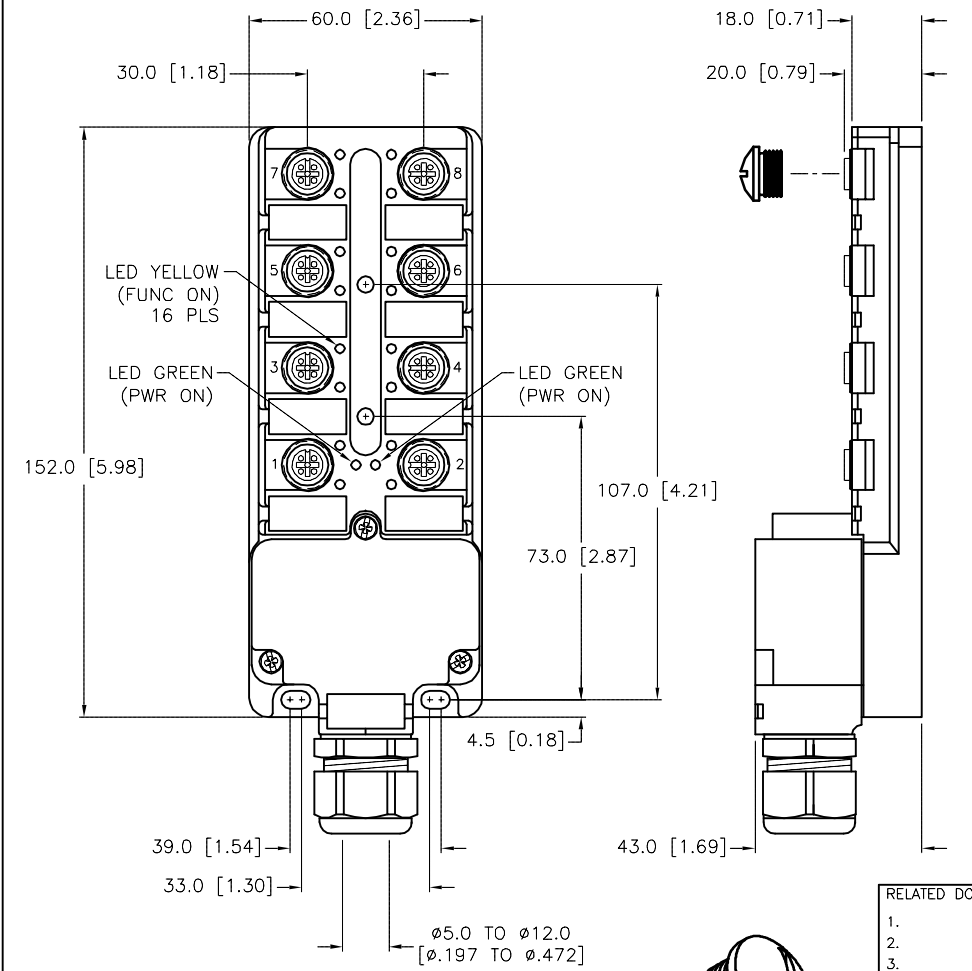

SOURCE DRAWING - FOR REFERENCE ONLY



CLOSURE CAPS
(2 INCLUDED)

<p>RELATED DOCUMENTS</p> <ol style="list-style-type: none"> 1. 2. 3. 4. 	<p>3RD ANGLE PROJECTION</p>	<p>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</p>	<p>TURCK IAC High Technology Sensors and Automation Controls</p>	<p>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</p>
<p>MATERIAL</p> <p>SEE SPECIFICATIONS</p>	<p>ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</p>	<p>DRFT JBU DATE 10/10/01</p> <p>APVD SCALE 1=2.0</p>	<p>DESCRIPTION</p> <p>8MB12-5P4-K-SK</p>	
<p>FINISH</p> <p>SEE SPECIFICATIONS</p>	<p>CONTACT TURCK FOR MORE INFORMATION</p>	<p>UNIT OF MEASUREMENT</p> <p>MILLIMETER [INCH]</p> <p>DO NOT SCALE THIS DRAWING</p>	<p>IDENTIFICATION NO.</p> <p>U8018198</p>	<p>REV</p> <p>D</p>
<p>D UPDATE OPERATING CURRENT RATINGS</p>	<p>KMY 10/11/13 43706</p>	<p>FILE: U8018198 SHEET 1 OF 1</p>		
<p>REV DESCRIPTION</p>	<p>BY DATE ECO NO.</p>			