


SPECIF	SPECIFICATIONS					
CONTACT CARRIER MATERIAL/COLOR	NYLON or PBT/GRAY					
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK					
CONTACT MATERIAL/PLATING	BRASS/GOLD					
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL					
RATED CURRENT [A]	6.0 A MAX,					
RATED VOLTAGE [V]	300 V PVC/YELLOW					
OUTER JACKET MATERIAL/COLOR						
CONDUCTOR INSULATION MATERIAL	PVC					
NUMBER OF CONDUCTORS [AWG]	11x18 AWG					
DRAIN/SHIELD	20 AWG DRAIN/POLYESTER FOIL SHIELD					
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)					
PROTECTION CLASS	IEC IP67					

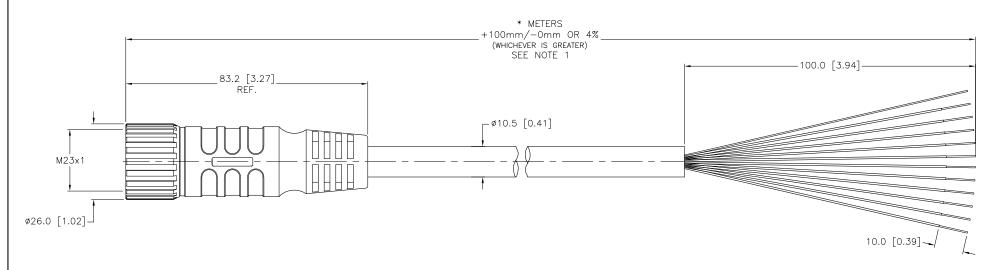

CBM 04/06/11

DATE

33971

ECO NO.

CABLE LENGTH	TOLERANCE			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER TOLERANCE ±0.5mm			
STRIP LENGTH				
0-7mm				
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			

SOURCE DRAWING - FOR REFERENCE ONLY

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769

(763) 553-7300

turck.com

(763) 553-0708 fax

REV

SHEET 1 OF 1

NOTES:

REV DESCRIPTION

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. STRIP AND TIN LENGTHS ARE FOR REFERENCE ONLY; SOME LENGTHS MAY NOT BE STRIPPED AND TINNED.

DRAWING PROCESSED AS PART OF ECO 33971

	RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology	RCHK Nar	(763)
	MATERIAL		DRFT JBJ	DATE 06/10/03	DESCRIPTION	CM 12-11-*
	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	DSGN	SCALE 1=1.3		CW 12-11-
		DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION NO.	
	FINISH	CONTACT TURCK	MILLIMETE	ER[INCH]	IDENTIFICATION NO.	
1	SEE SPECIFICATIONS	FOR MORE INFORMATION				
			DO NOT SCALE THIS DRAWING		FILE: 777001651	