



multibox[®] pentafast[®] Junction Boxes, 4-port

- Single Input/Output per port
- Threaded Connections
- Available with LEDs
- M12 Quick Disconnect or Integral Home run cable

4-Port, 3-pin, Threaded, 10-30 VDC


Application	Specifications	Pinout				PNP LED
4-Port j-box, 1 signal per port, threaded connectors, integral cable	1 A/port, 3 A total, Black TPU cable 2x24 AWG PWR Pair, 4x26 Signal	<u>Function</u> +V -V Port 1	<u>Color</u> BN BU WH	<u>Function</u> Port 2 Port 3 Port 4	<u>Color</u> GN YE GY	VBV 403M-PX5-*M/S90
4-Port j-box, 1 signal per port, threaded connectors, euofast[®] connector	1 A/port, 3 A total, 12-pin euofast[®] M12 connector, 12 conductors, Mates with RKC- 12T	<u>Function</u> +V -V Port 1/4	<u>Pin</u> 2 7 1	<u>Function</u> Port 2/4 Port 3/4 Port 4/4	<u>Pin</u> 3 4 5	VBV 403M-PX5-FS 12

Specifications


Housing:	Nylon
Connectors:	Nylon
Contacts:	Gold plated brass
Threaded Inserts:	Nickel plated brass
Cable:	See table
Temperature:	-30°C to +80°C (-22°F to 176°F)
Protection Class:	IP67
Cable Length:	Standard length for junction boxes and multifast series quick disconnect cordsets in nominal 5 meters. Other lengths available by request - consult factory

Dimensions

VBV 403M-PX5-*M/S90

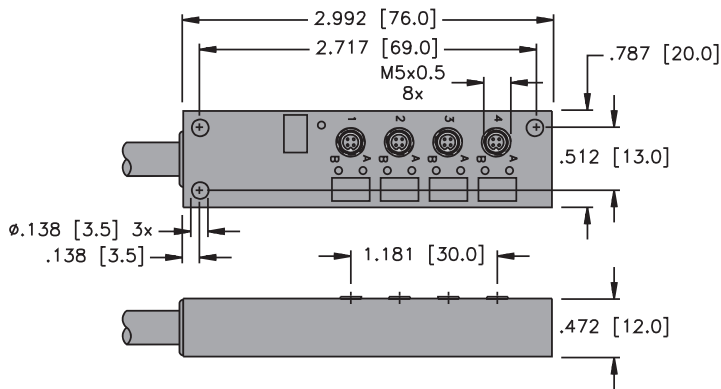

VBV 403M-PX5-FS 12

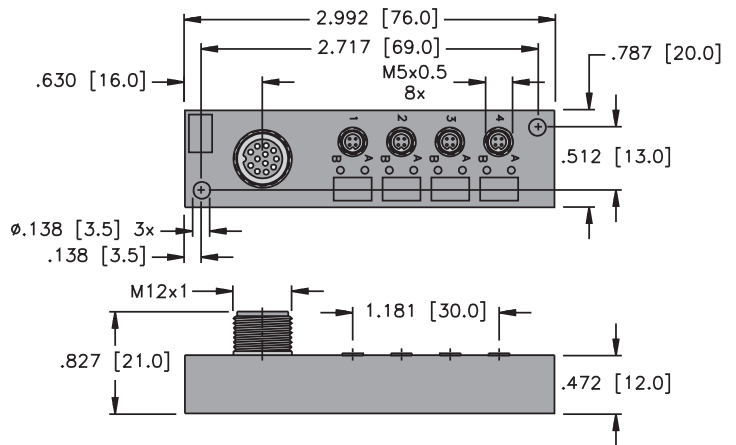

Multibox, pentafast

Pinout

Female	Male
3-pin pentafast	12-pin eurofast