

VZ 3 CLOSURE
CAPS (INCLUDED)

NOTE:

1. HOUSING HEIGHT: 33.0 mm [1.30 in.]

SPECIFICATIONS

CABLE DATA

MATING CORDSET

CK 12-0 or CKN 12-9-*

MATERIAL

HOUSING/COLOR

NYLON/BLUE

CONTACT CARRIERS/COLOR

TPU/BLACK

RECEPTACLE HOUSINGS

NICKEL PLATED BRASS

CONTACTS

GOLD PLATED COPPER ALLOY

SEALING RING

VITON O-RING

CONNECTOR HOUSING

NICKEL PLATED BRASS

ELECTRICAL DATA

MAXIMUM VOLTAGE

100 VDC

MAXIMUM CURRENT

4 AMPS PER PORT, 8 AMPS TOTAL

SPACINGS

VDE 0110 GROUP C




MECHANICAL DATA

PROTECTION CLASS to DIN 40050

IP 67 ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED

OPERATING TEMPERATURE


-40°C to 90°C (-40°F to 194°F)

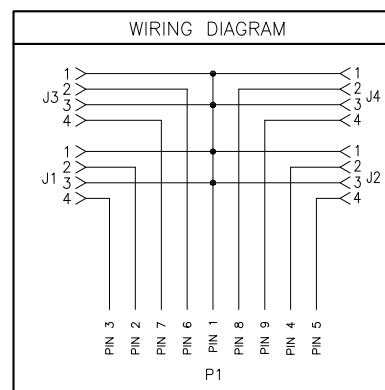

RELATED DOCUMENTS

1. 8-RDV-108
- 2.
- 3.
- 4.

3RD ANGLE PROJECTION



THIS DRAWING IS
PROPERTY OF
TURCK INC. USE OF
THIS DOCUMENT
WITHOUT WRITTEN
PERMISSION IS
PROHIBITED.

DRFT

DF

DATE 01/27/99

DSGN

DF

SCALE 1=1.5

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

TURCK INC
High Technology Sensors and Automation Controls

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
turck.com

DESCRIPTION

VB 40.5N - CS12

IDENTIFICATION NO.

U7016-18

REV

C

FILE: U7016-18

SHEET 1 OF 1

C	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/07/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.