






B1161 MALE END VIEW

FEMALE END VIEW




SPECIFICATIONS


CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
HOUSING MATERIAL/COLOR	NYLON/YELLOW
O-RING MATERIAL	VITON
RATED CURRENT [A]	4 AMPS PER PORT, 9 AMPS TOTAL
RATED VOLTAGE [V]	10-48 V
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS IP67

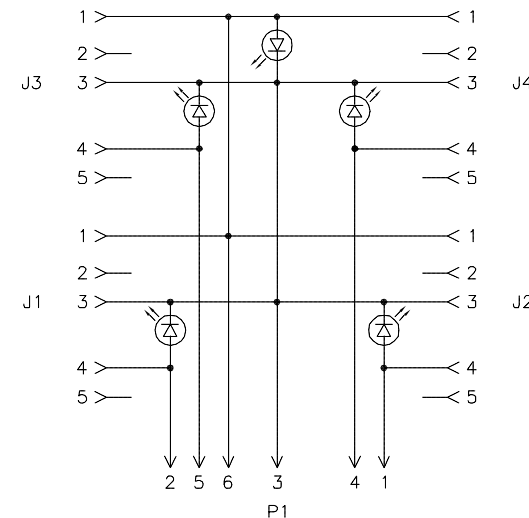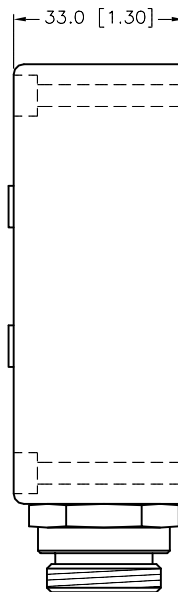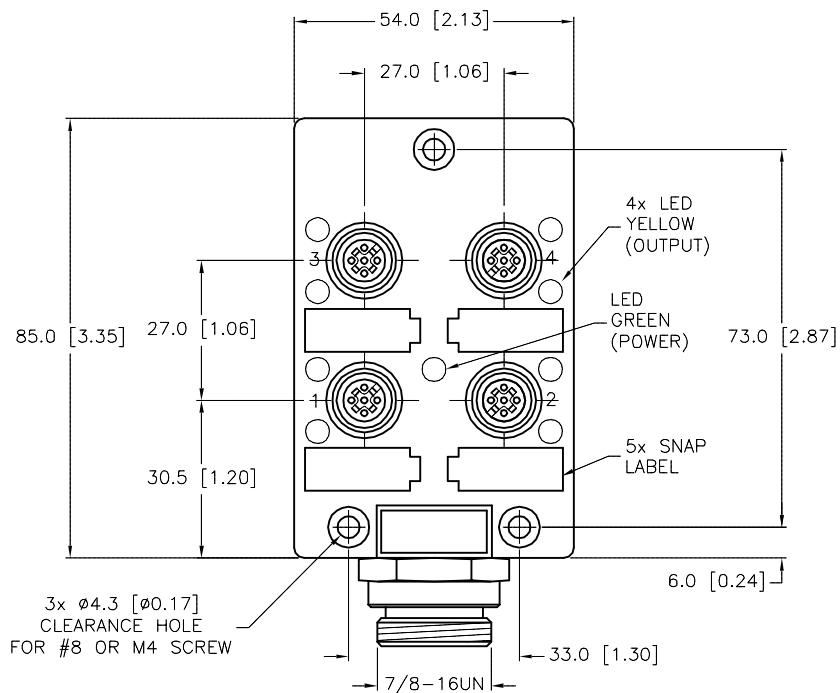

WIRING DIAGRAM



2x VZ 3 CLOSURE CAPS INCLUDED



SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com		
	MATERIAL  SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT RWC	DATE 08/12/08	DESCRIPTION  VB 40-P7X5-B1161	
	FINISH  SEE SPECIFICATIONS		APVD	SCALE 1=1.5		
			UNIT OF MEASUREMENT <b>MILLIMETER [ INCH ]</b>		IDENTIFICATION NO. U7006	REV C
C UPDATE WIRING DIAGRAM PER ECO		KMY 01/28/13	41066	DO NOT SCALE THIS DRAWING		
REV DESCRIPTION	BY DATE ECO NO.			FILE: U7006	SHEET 1 OF 1	