
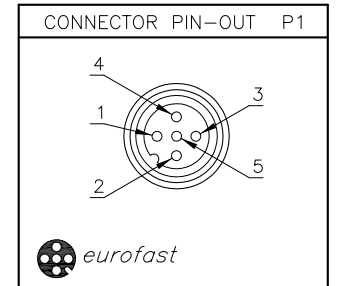
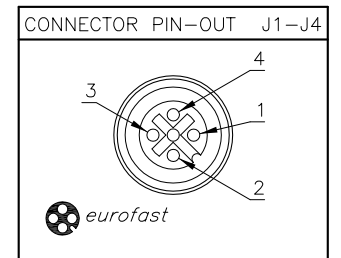


NOTE:
 1. HOUSING HEIGHT: 33.0 mm [1.30 in.]
 2. * = CABLE LENGTH IN METERS.

SPECIFICATIONS

CABLE DATA	
MATING CORDSET	RKCN 5T-*
MATERIAL	
HOUSING/COLOR	NYLON/BLUE
CONTACT CARRIERS/COLOR	TPU/BLACK
RECEPTACLE HOUSINGS	NICKEL PLATED BRASS
CONTACTS	GOLD PLATED COPPER ALLOY
SEALING RING	VITON O-RING
CONNECTOR HOUSING	NICKEL PLATED BRASS
ELECTRICAL DATA	
MAXIMUM VOLTAGE	100 VDC
MAXIMUM CURRENT	4 AMPS PER PORT, 4 AMPS TOTAL
SPACINGS	VDE 0110 GROUP C
MECHANICAL DATA	
PROTECTION CLASS to DIN 40050	IP 67 ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to 90°C (-40°F to 194°F)

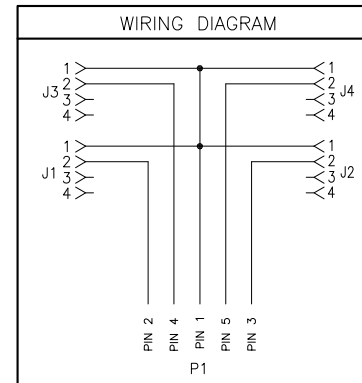

RELATED DOCUMENTS 1. 8-RDV-108 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com				
			DRFT DF	DATE 01/27/99	DESCRIPTION VB 40N-H1151		
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DSGN DF	SCALE 1=1.5	IDENTIFICATION NO. U7007-5			
FINISH	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		REV E			
E	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/07/11	33971	DO NOT SCALE THIS DRAWING	FILE: U7007-5	SHEET 1 OF 1
REV	DESCRIPTION	BY	DATE	ECO NO.			