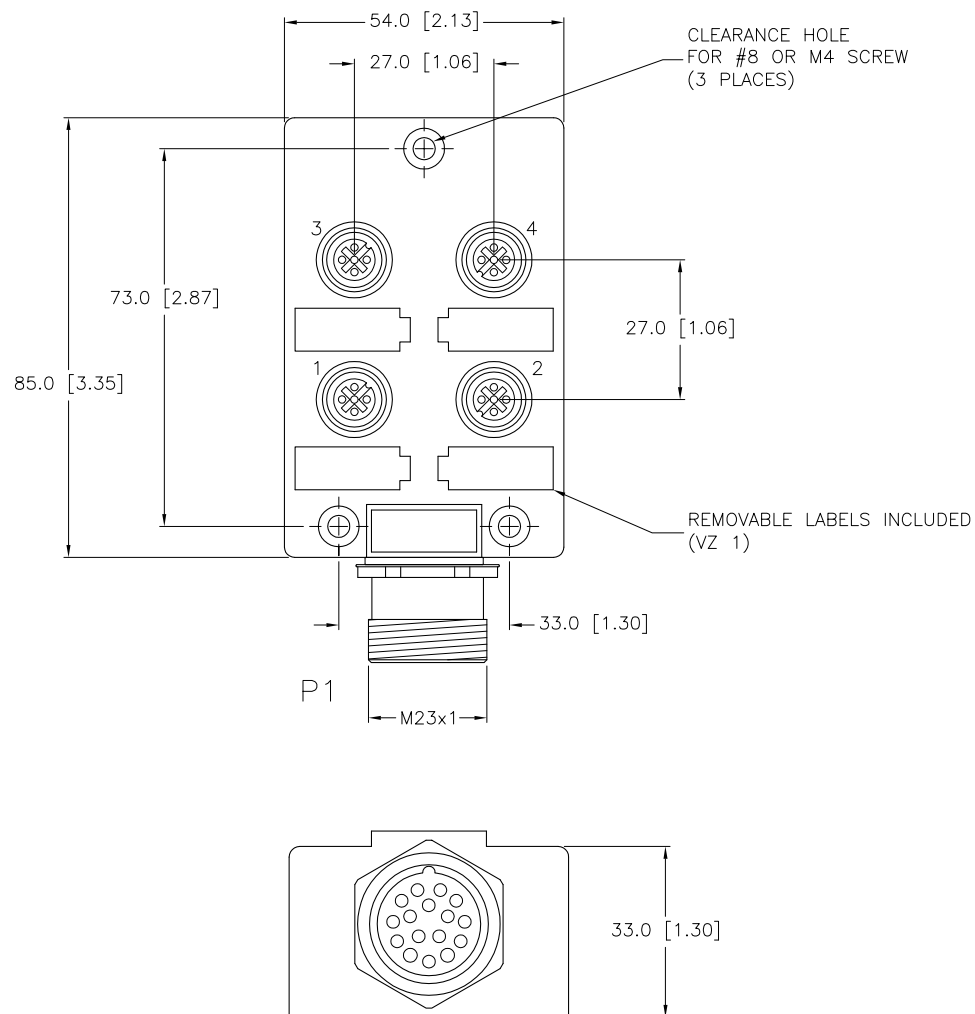


VZ 3 CLOSURE CAPS (INCLUDED)

SPECIFICATIONS

CABLE DATA

MATING CORDSET

CK 16-0 or CKN 16-16-*

MATERIAL

HOUSING/COLOR

NYLON/BLUE

CONTACT CARRIERS/COLOR

TPU/BLACK

RECEPTACLE HOUSINGS

NICKEL PLATED BRASS

CONTACTS

GOLD PLATED COPPER ALLOY

SEALING RING

VITON O-RING

CONNECTOR HOUSING

NICKEL PLATED BRASS

ELECTRICAL DATA

MAXIMUM VOLTAGE

100 VDC

MAXIMUM CURRENT

4 AMPS PER PORT, 8 AMPS TOTAL

SPACINGS

VDE 0110 GROUP C


MECHANICAL DATA

PROTECTION CLASS to DIN 40050



IP 67 ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED

OPERATING TEMPERATURE

-40°C to 90°C (-40°F to 194°F)

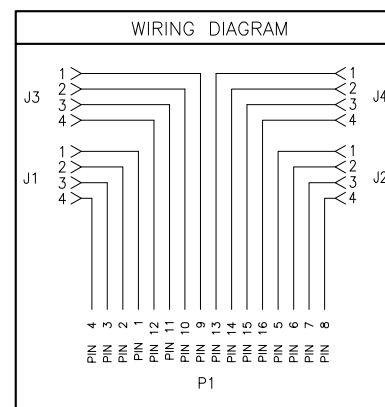


CONNECTOR PIN-OUT J1-J4



RELATED DOCUMENTS

1. 8-RDV-108
- 2.
- 3.
- 4.

3RD ANGLE PROJECTION



THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT

DF

DATE 01/27/99

DSGN

DF

SCALE 1=1.5

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

TURCK INC
High Technology Sensors and Automation Controls

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
turck.com

DESCRIPTION

VB 4X1.5N-CS16

IDENTIFICATION NO.

U0173-40

REV

C

FILE: U0173-40

SHEET 1 OF 1

C	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/07/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.