


SPECIFICATIONS					
HOUSING MATERIAL/COLOR	NYLON/YELLOW				
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
OPERATING CURRENT	4.0 A/PORT, 10.0 A TOTAL				
OPERATING VOLTAGE	10-48 VDC				
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW				
CONDUCTOR INSULATION MATERIAL	PVC				
NUMBER OF CONDUCTORS [AWG]	9x18 AWG				
DRAIN/SHIELD	20 AWG DRAIN/POLYESTER FOIL SHIELD				
TEMPERATURE RANGE	-30°C to +80°C (-22°F to +176°F)				
PROTECTION CLASS	IEC IP67, ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTORS.				

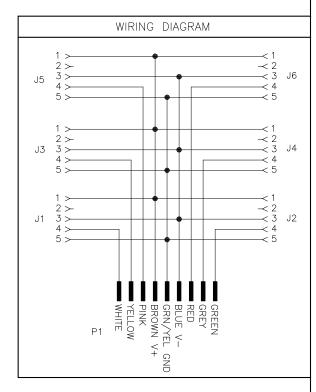

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

С	UPDATE CABLE DIAMETER	KMY	01/31/12	36342
ΕV	DESCRIPTION	BY	DATE	ECO NO

١	RELATED DOCUMENTS	3RD ANGLE PROJECTION		DRAWING IS				3000 C.			
	1. 2. 3. 4.	⊕ □	PROPER INC. U DOCUM WRITTEN	TY OF TURCK USE OF THIS ENT WITHOUT PERMISSION IS OHIBITED.		High Technology Sensors and Automation Controls			MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com		
	ATERIAL		DRFT	RWC	DATE 01/18/06	DESCRIPTION	VB 60	.			
	SEE SPECIFICATIONS DISPLAYED ON TH DRAWING ARE FO REFERENCE ONL'	ALL DIMENSIONS DISPLAYED ON THIS	APVD		SCALE 1=2.0	AR Of					
		DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT			IDENTIFICATION NO.					
	SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION		MILLIMETE	ER [INCH]	DENTIFICATION NO.				C	
7			D	NOT SCALE	THIS DRAWING	FILE: 777000401			SHEET	1 OF 1	