

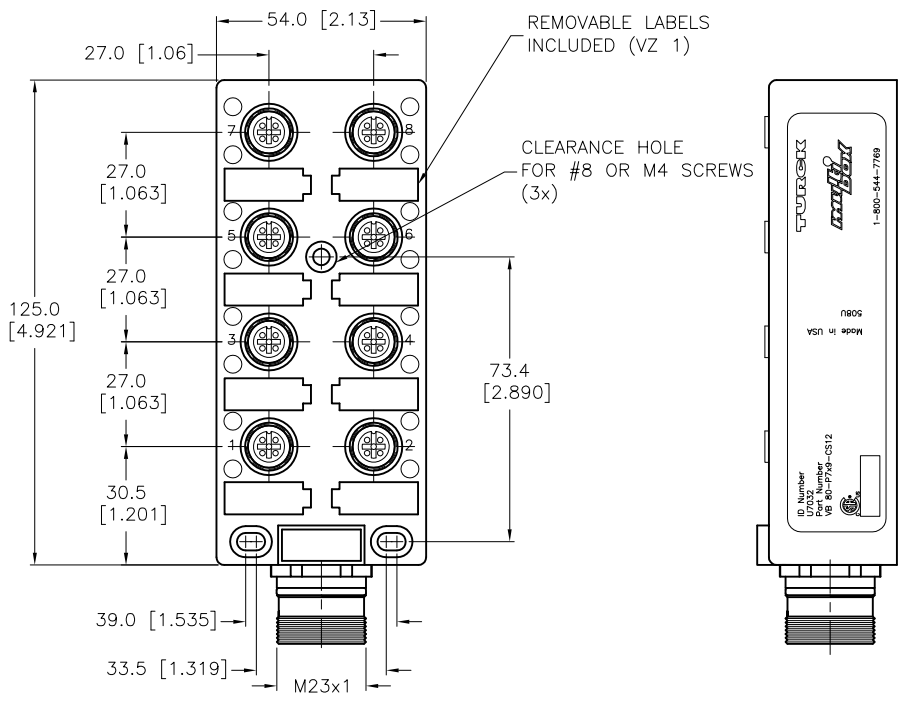


SPECIFICATIONS	
CABLE DATA	
MATING PLUG CABLE	CK 12-11-*, SEE NOTE 1
MATERIAL	
HOUSING/COLOR	NYLON/YELLOW
CONTACT CARRIERS/COLOR	NYLON/BLACK (J1-J8), TPU/YELLOW (P1)
CONTACTS MATERIAL/PLATING	BRASS/GOLD(J1-J8)
DISCONNECT MATERIAL/PLATING	BRASS/NICKEL (P1)
ELECTRICAL DATA	
OPERATING VOLTAGE	10-48 VDC
LED FUNCTION	FOR PNP SENSOR OUTPUT
MAXIMUM CURRENT	4 AMPS PER PORT, 5 AMPS TOTAL
MECHANICAL DATA	
PROTECTION CLASS TO DIN 40050	IP 67 - ONLY WITH CK-12 CORDSET AND ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATION TEMPERATURE RANGE	-30°C to +90°C (-25°F to +194°F)

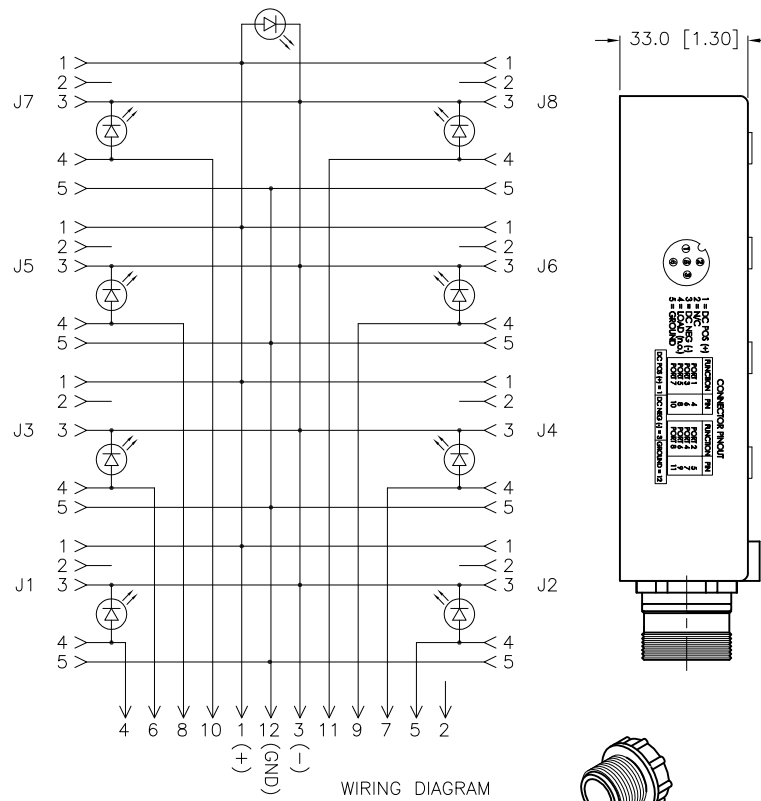

NOTES:
1. USE MATING CORDSET CK 12-11-*(SOLD SEPARATELY).

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
		DRFT	RJP	DATE	12/08/94
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DSGN		SCALE	1=2.0
FINISH SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U7032
DO NOT SCALE THIS DRAWING		FILE: U7032		SHEET 1 OF 1	

J	REMOVE TRADEMARKED MATERIAL REFERENCES	CBM	11/16/12	40471
REV	DESCRIPTION	BY	DATE	ECO NO.