
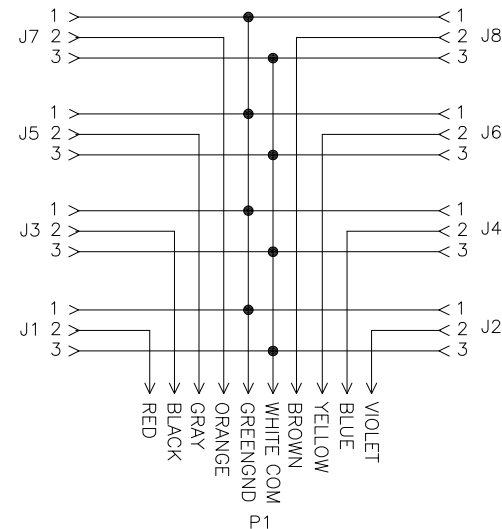


SPECIFICATIONS	
CABLE DATA	
OUTTER JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION	PVC
NUMBER OF CONDUCTORS [AWG]	10x18 AWG
DRAIN/SHIELD	20 AWG DRAIN/POLYESTER FOIL SHIELD
MATERIAL	
HOUSING MATERIAL/COLOR	NYLON/YELLOW
CONTACT CARRIER MAT'L/COLOR	NYLON/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
SEALING RING MATERIAL	VITON O-RING
ELECTRICAL DATA	
OPERATING VOLTAGE	250 VAC/300 VDC
OPERATING CURRENT	4.0 AMPS PER PORT, 9.0 AMPS TOTAL
MECHANICAL DATA	
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +105°C (-40°F to +221°F)

FEMALE END VIEW (J1-J8)



WIRING DIAGRAM



SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.



SB-CC CLOSURE
CAPS (2 INCLUDED)

RELATED DOCUMENTS		3RD ANGLE PROJECTION		<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div> <div> High Technology Sensors and Automation Controls</div>		<div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div>	
1.							
2.							
3.							
4.							
MATERIAL		DRFT RWC		DATE 07/06/07		DESCRIPTION VBKB 80-*	
SEE SPECIFICATIONS		APVD		SCALE 1=2			
FINISH		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.	
SEE SPECIFICATIONS						REV C	
		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		FILE: 777010004	
						SHEET 1 OF 1	