


SPECIFICATIONS

CABLE DATA	
MATING PLUG CABLE	CK12-0-* or CK12-7-*
MATERIAL	
HOUSING	ALUMINUM ALLOY
CONNECTOR	NICKEL PLATED BRASS
CONTACT CARRIERS/BLACK	TPU
CONTACTS	GOLD PLATED BRASS
ELECTRICAL DATA	
OPERATING VOLTAGE	10-48 VDC
OPERATING CURRENT	4.0 A per PORT, 8.0 A TOTAL
MECHANICAL DATA	
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to 90°C (-40°F to 194°F)

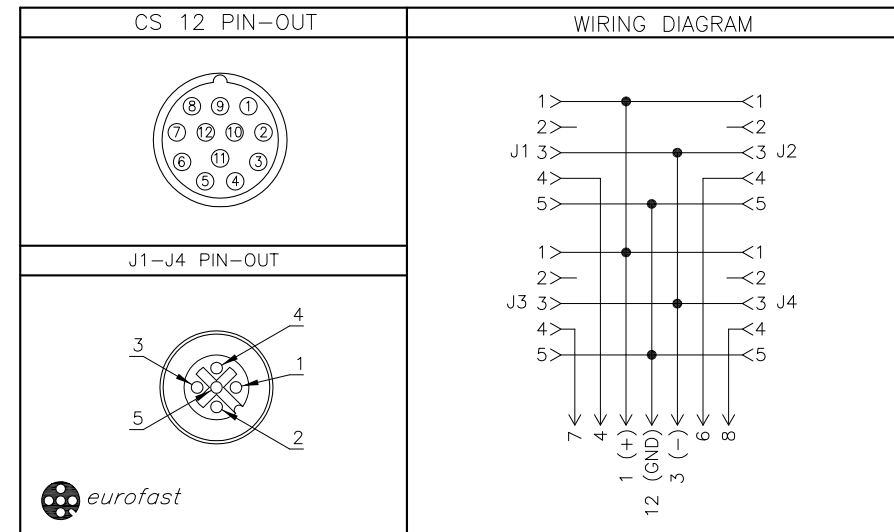

- NOTES:
 1. USE MATING CORDSET CK12-7-* (* = CABLE LENGTH IN METERS).
 2. BOX HEIGHT = 1.36 [34.5] NOMINAL.
 3. CLEARANCE HOLE FOR 1/4-20 MOUNTING SCREWS (NOT INCLUDED).

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
	MATERIAL	DRFT IK	DATE 11/4/98	DESCRIPTION VBM 40-CS12	
FINISH	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DSGN	SCALE 1=2	IDENTIFICATION NO. U0114-10	
	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		REV B	
B	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/07/11	33971	
REV	DESCRIPTION	BY	DATE	ECO NO.	DO NOT SCALE THIS DRAWING
					FILE: U0114-10
					SHEET 1 OF 1