

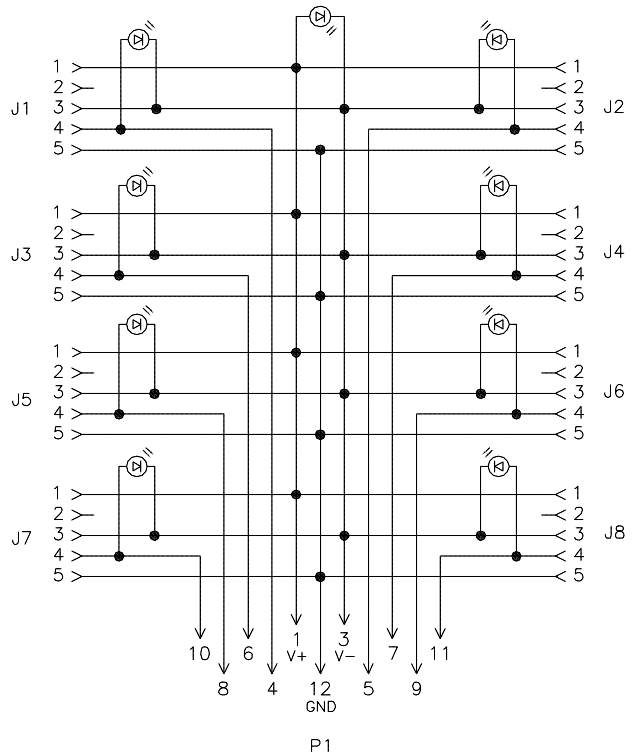
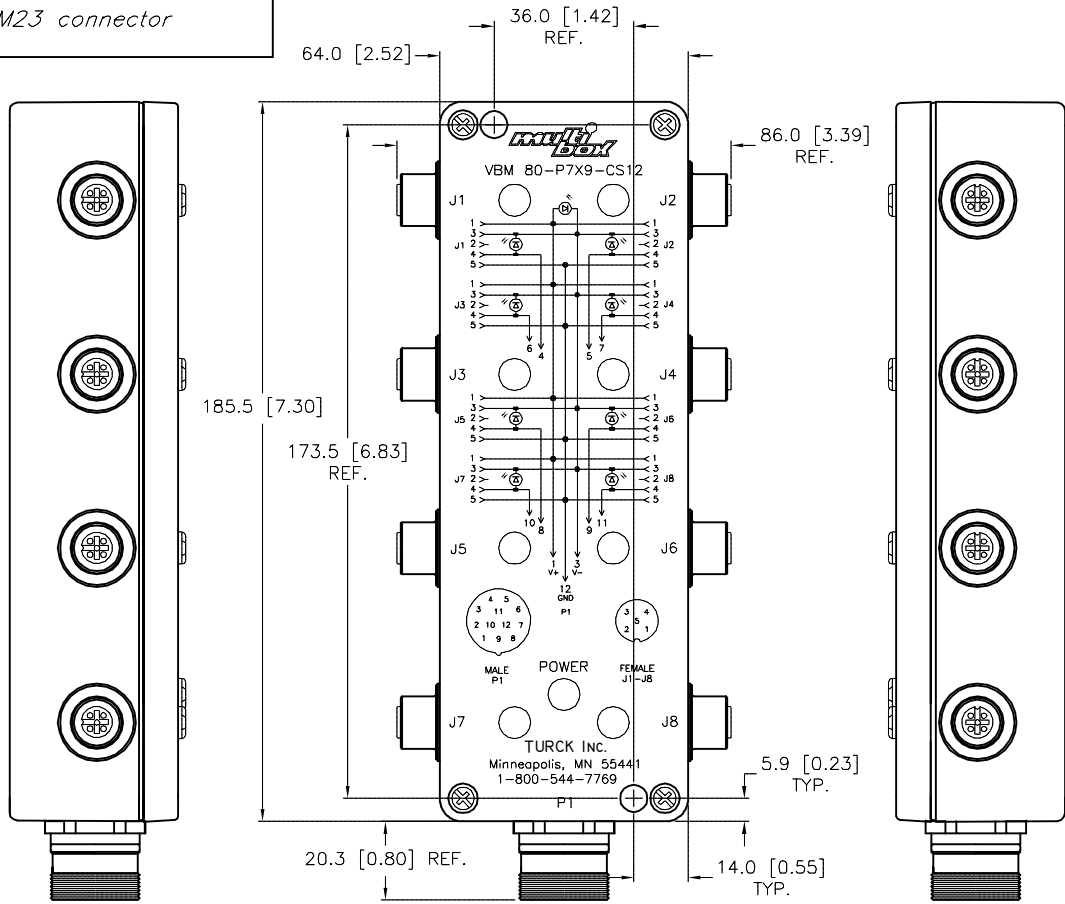


SPECIFICATIONS	
HOUSING MATERIAL	DIE-CAST ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER COAT/BLACK
RECEPTACLE HOUSING MAT'L/PLATING	BRASS/NICKEL
CONTACT CARRIER MATERIAL	NYLON (J1-J8), NYLON or PBT (P1)
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	10-48 VDC
OPERATING CURRENT	4.0 AMPS PER CONNECTOR, 8 AMPS MAX
LED FUNCTION	FOR PNP SENSOR OUTPUT
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +90°C (-40°F to +194°F)

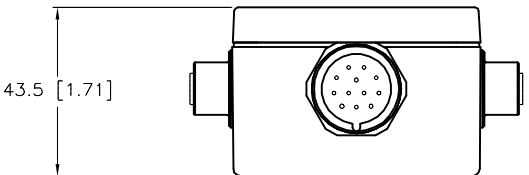

SOURCE DRAWING - FOR REFERENCE ONLY



VZ 3 CLOSURE CAPS (2 INCLUDED)

RELATED DOCUMENTS	
1.	
2.	
3.	
4.	
MATERIAL	SEE SPECIFICATIONS
FINISH	SEE SPECIFICATIONS

3RD ANGLE PROJECTION	
ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	
CONTACT TURCK FOR MORE INFORMATION	

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	
DRFT	JBJ
APVD	
UNIT OF MEASUREMENT	
<b>MILLIMETER [ INCH ]</b>	
DO NOT SCALE THIS DRAWING	

<p>High Technology Sensors and Automation Controls</p>		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
DATE 01/17/01		DESCRIPTION	
SCALE 1=2.0		VBM 80-P7X9-CS12	
IDENTIFICATION NO.		REV	
U0114-20		C	
FILE: U0114-20		SHEET 1 OF 1	

REV	DESCRIPTION	BY	DATE	ECO NO.
C	UPDATE SPECS	RDS	04/17/14	45445