



*multibox*® *pico fast*® Junction Boxes, 8-port, 3-Pin

- Snap Lock or Threaded Connectors
- Available with or without LEDs
- M16 Quick Disconnect or Integral Home Run Cable

**8-port, Snap Lock, 10-48 VDC**


Application	Specifications	Pinout	No LEDs	PNP LED																								
8-port j-box Snap lock connectors Top Integral cable	3 A/port, 3 A total Black PVC cable 10x24 AWG	<table border="0"> <tr> <td><u>Function</u></td> <td><u>Color</u></td> <td><u>Function</u></td> <td><u>Color</u></td> </tr> <tr> <td>+V</td> <td>BN</td> <td>Port 4</td> <td>GY</td> </tr> <tr> <td>-V</td> <td>BU</td> <td>Port 5</td> <td>PK</td> </tr> <tr> <td>Port 1</td> <td>WH</td> <td>Port 6</td> <td>RD</td> </tr> <tr> <td>Port 2</td> <td>GN</td> <td>Port 7</td> <td>BK</td> </tr> <tr> <td>Port 3</td> <td>YE</td> <td>Port 8</td> <td>VT</td> </tr> </table>	<u>Function</u>	<u>Color</u>	<u>Function</u>	<u>Color</u>	+V	BN	Port 4	GY	-V	BU	Port 5	PK	Port 1	WH	Port 6	RD	Port 2	GN	Port 7	BK	Port 3	YE	Port 8	VT	VB 803Z-*	VB 803Z-PX9-*
<u>Function</u>	<u>Color</u>	<u>Function</u>	<u>Color</u>																									
+V	BN	Port 4	GY																									
-V	BU	Port 5	PK																									
Port 1	WH	Port 6	RD																									
Port 2	GN	Port 7	BK																									
Port 3	YE	Port 8	VT																									
8-port J-box 1 signal per port Snap lock connectors Side Integral cable	3 A/port, 4 A total Black PVC cable 10x24 AWG	<table border="0"> <tr> <td>Port 1</td> <td>WH</td> <td>Port 6</td> <td>RD</td> </tr> <tr> <td>Port 2</td> <td>GN</td> <td>Port 7</td> <td>BK</td> </tr> <tr> <td>Port 3</td> <td>YE</td> <td>Port 8</td> <td>VT</td> </tr> </table>	Port 1	WH	Port 6	RD	Port 2	GN	Port 7	BK	Port 3	YE	Port 8	VT	VB 803Z-*C	VB 803Z-PX9*C												
Port 1	WH	Port 6	RD																									
Port 2	GN	Port 7	BK																									
Port 3	YE	Port 8	VT																									
8-port J-box, Snap lock connectors M16 connector	3 A/port, 3 A total 14 pin M16 connector 10 conductors mates with BKM 14-836-*	<table border="0"> <tr> <td><u>Function</u></td> <td><u>Pin/Color</u></td> <td><u>Function</u></td> <td><u>Pin/Color</u></td> </tr> <tr> <td>+V</td> <td>M/BN</td> <td>Port 4</td> <td>C/GY</td> </tr> <tr> <td>-V</td> <td>U/BU</td> <td>Port 5</td> <td>N/PK</td> </tr> <tr> <td>Port 1</td> <td>P/WH</td> <td>Port 6</td> <td>R/RD</td> </tr> <tr> <td>Port 2</td> <td>E/GN</td> <td>Port 7</td> <td>G/BK</td> </tr> <tr> <td>Port 3</td> <td>O/YE</td> <td>Port 8</td> <td>S/VT</td> </tr> </table>	<u>Function</u>	<u>Pin/Color</u>	<u>Function</u>	<u>Pin/Color</u>	+V	M/BN	Port 4	C/GY	-V	U/BU	Port 5	N/PK	Port 1	P/WH	Port 6	R/RD	Port 2	E/GN	Port 7	G/BK	Port 3	O/YE	Port 8	S/VT	VB 803Z-BS14	VB 803Z-PX9-BS14
<u>Function</u>	<u>Pin/Color</u>	<u>Function</u>	<u>Pin/Color</u>																									
+V	M/BN	Port 4	C/GY																									
-V	U/BU	Port 5	N/PK																									
Port 1	P/WH	Port 6	R/RD																									
Port 2	E/GN	Port 7	G/BK																									
Port 3	O/YE	Port 8	S/VT																									

**8-port, Threaded, 10-48 VDC**


Application	Specifications	Pinout	No LEDs	PNP LED																								
8-port j-box Threaded connectors Top Integral cable	3 A/port, 3 A total Black PVC cable 10x24 AWG	<table border="0"> <tr> <td><u>Function</u></td> <td><u>Color</u></td> <td><u>Function</u></td> <td><u>Color</u></td> </tr> <tr> <td>+V</td> <td>BN</td> <td>Port 4</td> <td>GY</td> </tr> <tr> <td>-V</td> <td>BU</td> <td>Port 5</td> <td>PK</td> </tr> <tr> <td>Port 1</td> <td>WH</td> <td>Port 6</td> <td>RD</td> </tr> <tr> <td>Port 2</td> <td>GN</td> <td>Port 7</td> <td>BK</td> </tr> <tr> <td>Port 3</td> <td>YE</td> <td>Port 8</td> <td>VT</td> </tr> </table>	<u>Function</u>	<u>Color</u>	<u>Function</u>	<u>Color</u>	+V	BN	Port 4	GY	-V	BU	Port 5	PK	Port 1	WH	Port 6	RD	Port 2	GN	Port 7	BK	Port 3	YE	Port 8	VT	VB 803M-*	VB 803M-PX9-*
<u>Function</u>	<u>Color</u>	<u>Function</u>	<u>Color</u>																									
+V	BN	Port 4	GY																									
-V	BU	Port 5	PK																									
Port 1	WH	Port 6	RD																									
Port 2	GN	Port 7	BK																									
Port 3	YE	Port 8	VT																									
8-port J-box 1 signal per port Threaded connectors Side Integral cable	3 A/port, 4 A total Black PVC cable 10x24 AWG	<table border="0"> <tr> <td>Port 1</td> <td>WH</td> <td>Port 6</td> <td>RD</td> </tr> <tr> <td>Port 2</td> <td>GN</td> <td>Port 7</td> <td>BK</td> </tr> <tr> <td>Port 3</td> <td>YE</td> <td>Port 8</td> <td>VT</td> </tr> </table>	Port 1	WH	Port 6	RD	Port 2	GN	Port 7	BK	Port 3	YE	Port 8	VT	VB 803M-*C	VB 803M-PX9-*C												
Port 1	WH	Port 6	RD																									
Port 2	GN	Port 7	BK																									
Port 3	YE	Port 8	VT																									
8-port J-box, Threaded connectors M16 connector	3 A/port, 3 A total 14 pin M16 connector 10 conductors mates with BKM 14-836-*	<table border="0"> <tr> <td><u>Function</u></td> <td><u>Pin/Color</u></td> <td><u>Function</u></td> <td><u>Pin/Color</u></td> </tr> <tr> <td>+V</td> <td>M/BN</td> <td>Port 4</td> <td>C/GY</td> </tr> <tr> <td>-V</td> <td>U/BU</td> <td>Port 5</td> <td>N/PK</td> </tr> <tr> <td>Port 1</td> <td>P/WH</td> <td>Port 6</td> <td>R/RD</td> </tr> <tr> <td>Port 2</td> <td>E/GN</td> <td>Port 7</td> <td>G/BK</td> </tr> <tr> <td>Port 3</td> <td>O/YE</td> <td>Port 8</td> <td>S/VT</td> </tr> </table>	<u>Function</u>	<u>Pin/Color</u>	<u>Function</u>	<u>Pin/Color</u>	+V	M/BN	Port 4	C/GY	-V	U/BU	Port 5	N/PK	Port 1	P/WH	Port 6	R/RD	Port 2	E/GN	Port 7	G/BK	Port 3	O/YE	Port 8	S/VT	VB 803M-BS14	VB 803M-PX9-BS14
<u>Function</u>	<u>Pin/Color</u>	<u>Function</u>	<u>Pin/Color</u>																									
+V	M/BN	Port 4	C/GY																									
-V	U/BU	Port 5	N/PK																									
Port 1	P/WH	Port 6	R/RD																									
Port 2	E/GN	Port 7	G/BK																									
Port 3	O/YE	Port 8	S/VT																									

**Functional Wiring Diagrams**

**No LED Version**



**LED Version**




**Specifications**


- Housing:** Nylon
- Connectors:** TPU (*picofast*<sup>®</sup>); nylon or TPU (*eufofast*<sup>®</sup>); PETP (M16)
- Contacts:** Gold plated brass
- Thread Inserts:** Nickel plated brass
- Cable:** See table
- Temperature:** -30°C to +80°C (-22°F to +176°F)
- Protection Class:** IEC IP 67
- Accessories:** KS 5/10 labels, 2 pieces PSG-CC (snap lock) or PSGM-CC (threaded) included
- Cable Length:** Standard length for junction boxes and M16 quick disconnect cordsets is nominal 5 meters  
Other lengths available by request. Consult factory

**Dimensions**


**8-Port with eufofast Home Run Connector**

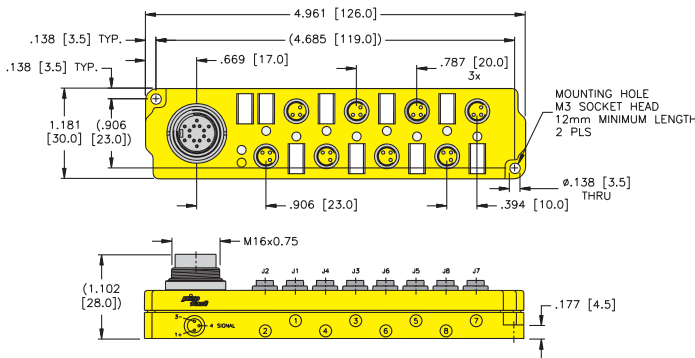

**8-Port with Side Integral Home Run Cable**

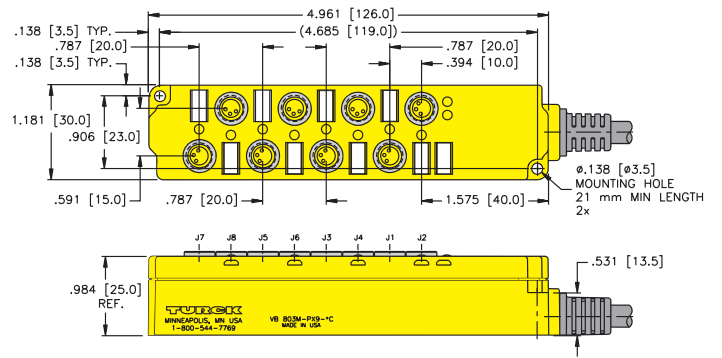

**8-Port with Top Integral Home Run Cable**

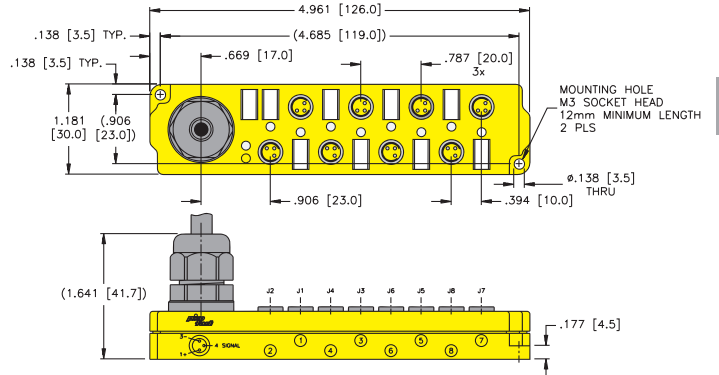

**Pinout**

Female	Male
<b>3-pin picofast</b>	<b>14-pin versafast<sup>®</sup></b>

Multibox, picofast