

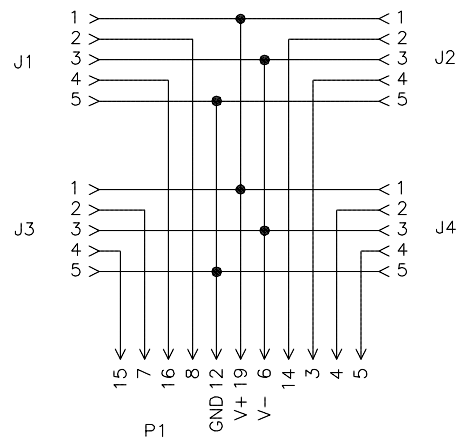


SPECIFICATIONS	
MATERIAL	
HOUSING MATERIAL	DIE-CAST ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER-COAT/BLACK
RECEPTACLE HOUSING/PLATING	BRASS/NICKEL
CONTACT CARRIERS	NYLON OR TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
SEALING O-RING MATERIAL	VITON O-RING
ELECTRICAL DATA	
OPERATING VOLTAGE	10-48 VDC
MAXIMUM CURRENT	4.0 AMPS PER PORT, 9.0 AMPS TOTAL
MECHANICAL DATA	
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +90°C (-40°F to +194°F)

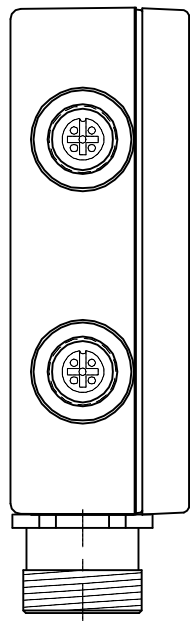

WIRING DIAGRAM

SOURCE DRAWING - FOR REFERENCE ONLY

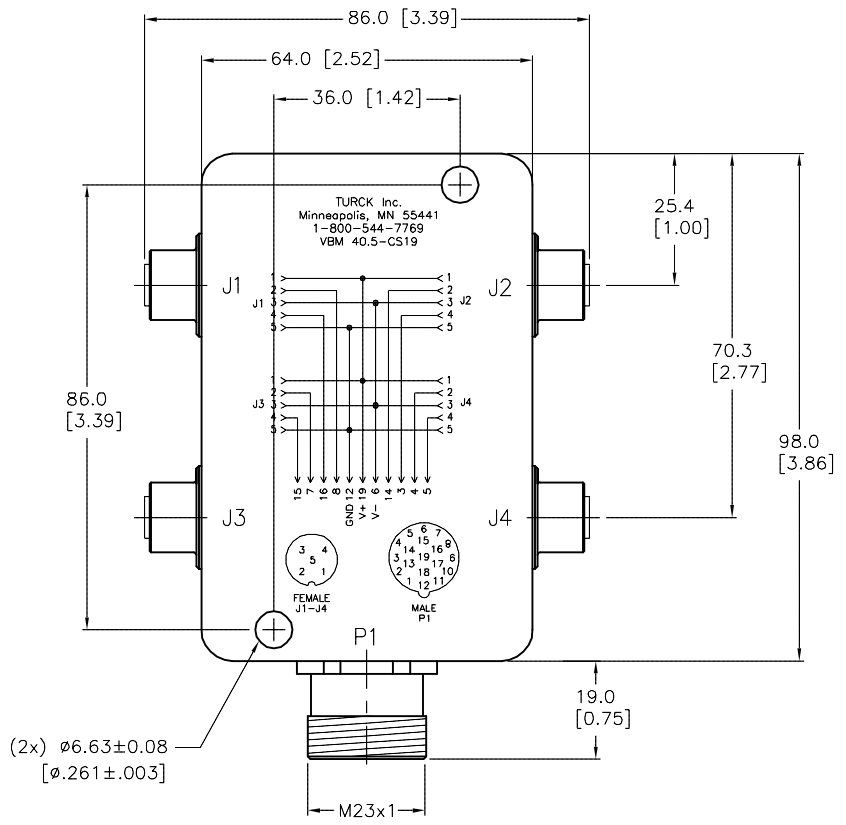

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
		MATERIAL SEE SPECIFICATIONS	DRFT RDS APVD	DATE 01/23/09 SCALE 1=1.5	DESCRIPTION VBM 40.5-CS19
FINISH SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U3-10832	
DO NOT SCALE THIS DRAWING		FILE: U3-10832		REV D	

D	UPDATED CLOSURE CAPS	TV	09/15/15	48811
REV	DESCRIPTION	BY	DATE	ECO NO.