

BALDOR® • RELIANCE

Product Information Packet

CL3515T

2HP,3450RPM,1PH,60HZ,145TC,3535L,TEFC,F1

Copyright © All product information within this document is subject to Baldor Electric Company copyright © protection, unless otherwise noted.

Part Detail									
Revision:	J	Status:	PRD/A	Change #:		Proprietary:	No		
Type:	AC	Prod. Type:	3535L	Elec. Spec:	35WG0506	CD Diagram:			
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	35Y527	Layout:			
Frame:	145TC	Mounting:	F1	Poles:	02	Created Date:	12-08-2009		
Base:	RG	Rotation:	R	Insulation:	F	Eff. Date:	04-27-2012		
Leads:	4#14 A PH,2#18 B PH	Literature:		Elec. Diagram:		Replaced By:			
Nameplate NP1256L									
CAT.NO.	CL3515T								
SPEC.	35Y527-0506G1								
HP	2								
VOLTS	115/230								
AMP	23/11.5								
RPM	3450								
FRAME	145TC	HZ	60	PH	1				
SER.F.	1.15	CODE	K	DES	L	CLASS	F		
NEMA-NOM-EFF	74	PF	82						
RATING	40C AMB-CONT								
CC		USABLE AT 208V	12						
DE	6205	ODE	6203						
ENCL	TEFC	SN							


Parts List		
Part Number	Description	Quantity
SA188470	SA 35Y527-0506G1	1.000 EA
RA176203	RA 35Y527-0506G1	1.000 EA
EC1645A06SP	ELEC CAP, 645-774 MFD, 125V, 2.06D X 4.	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
35CB3009	35 CB CASTING W/1.09 DIA. LEAD HOLE @ 6:	1.000 EA
36GS1000SP	GASKET-CONDUIT BOX, .06 THICK #SV-330 LE	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 EA
35EP3100M01	FREP TEFC 203 BRG W/GRSR (RAISED FH PADS	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
NS2501A01	INSULATOR, CAPACITOR	1.000 EA
51XB1016A05	10-16X5/16HX WA SL SR TYB (F/S)	2.000 EA
HW5100A03SP	WAVY WASHER (W1543-017)	1.000 EA
35EP3300A46	SPL FACE MTD EP-ENCL-145TC-205 BRG	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
51XN1032A20	10-32 X 1 1/4 HX WS SL SR	2.000 EA
35FH4005A84SP	IEC FH W/GRSR, NO DIMPLES W/AUTOPHERETIC	1.000 EA
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 EA
35CB4521GX	CONDUIT BOX LID KIT	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HW2501D13SP	KEY, 3/16 SQ X 1.375	1.000 EA
HA7000A01	KEY RETAINER 7/8" DIA SHAFT	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA

Parts List (continued)		
Part Number	Description	Quantity
WD1000A15	3-520132-2 AMP FLAG (4M/RL NON-CANC/NON-	2.000 EA
MJ1000A75	GREASE, POLYREX EM EXXON	0.050 LB
35FN3002A05SP	EXFN, PLASTIC, 6.376 OD, .638 ID	1.000 EA
51XB1214A16	12-14X1.00 HXWSSLD SERTYB	1.000 EA
MG1000G27	PAINT- S9282E CHARCOAL GREY	0.017 GA
SP5055A67	MODEL 35 TYPE L STATIONARY SWITCH	1.000 EA
35CB4802A02SP	CAPACITOR COVER, STAMPED X W/AUTOPHORET	1.000 EA
35GS3001A02	GASKET, CA.COVER, 5.38 LONG .06 CS301	1.000 EA
HA3100A18	THRUBOLT 10-32 X 9.250	4.000 EA
LB1125C01	STD (STOCK) CARTON LABEL BALDOR WITH FLA	1.000 EA
LC0001A01	CONN LABEL / WARNING LABEL (LC0001 / LB1	1.000 EA
NP1256L	ALUM UL CSA CC	1.000 EA
35PA1066	PACKING GROUP COMBINED PRINT	1.000 EA

Performance Data at 230V, 60Hz, 2.0HP (Typical performance - Not guaranteed values)

General Characteristics							
Full Load Torque:		3.0 LB-FT		Start Configuration:		DOL	
No-Load Current:		6.0 Amps		Break-Down Torque:		9.0 LB-FT	
Line-line Res. @ 25°C.:		0.864 Ohms A Ph / 1.26 Ohms B Ph		Pull-Up Torque:		6.0 LB-FT	
Temp. Rise @ Rated Load:		82 C		Locked-Rotor Torque:		7.5 LB-FT	
Temp. Rise @ S.F. Load:		91 C		Starting Current:		78.0 Amps	
Load Characteristics							
% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	50.0	65.0	75.0	81.0	85.0	87.0	83.0
Efficiency:	49.1	64.2	70.5	73.4	74.3	74.1	73.9
Speed:	3569.0	3548.0	3524.0	3499.0	3471.0	3438.0	3482.0
Line Amperes:	6.65	7.75	9.2	10.9	12.9	15.1	12.1

Performance Graph at 230V, 60Hz, 2.0HP Typical performance - Not guaranteed values

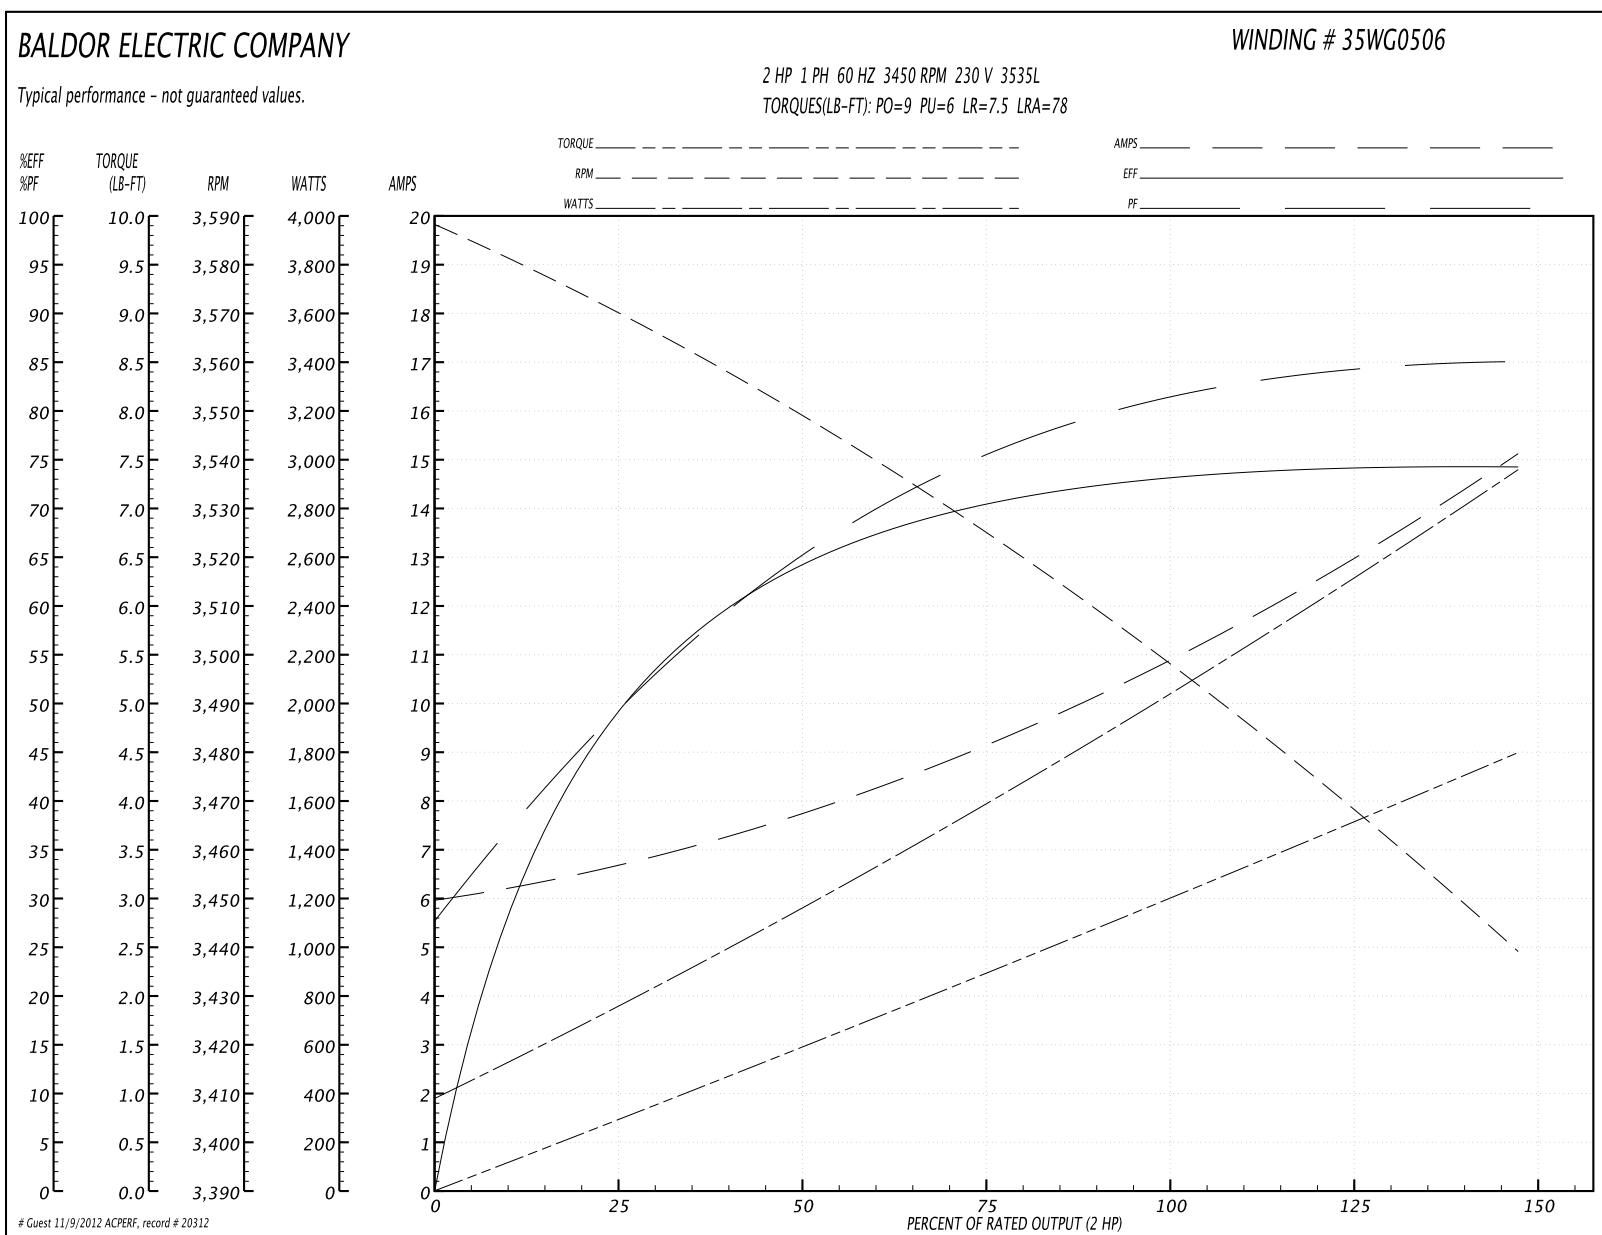



REV. DESC: NEW

REV. LTR: -

VERSION: 00

TDR: 000000520890

FILE: \AAA\00168\053

REVISÉ: 09:13:07 12/08/2009

MTL: —

BY: ENGAMGO

BALDOR • DODGE • RELIANCE®

HORZ 143-5TC TEFC 35L W/2 POLE "W" BASE & 1.09 LEAD HOLE

SH 1 of 1

35LYY527

CD0001

