

BALDOR® • RELIANCE

Product Information Packet

CM3537

.5HP,3450RPM,3PH,60HZ,56C,3410M,TEFC,F1

Copyright © All product information within this document is subject to Baldor Electric Company copyright © protection, unless otherwise noted.

Part Detail										
Revision:	Q	Status:	PRD/A	Change #:		Proprietary:	No			
Type:	AC	Prod. Type:	3410M	Elec. Spec:	34WG0232	CD Diagram:				
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	34A062	Layout:				
Frame:	56C	Mounting:	F1	Poles:	02	Created Date:				
Base:	RG	Rotation:	R	Insulation:	B	Eff. Date:	03-23-2011			
Leads:	9#18	Literature:		Elec. Diagram:		Replaced By:				
Nameplate NP1256L										
CAT.NO.		CM3537								
SPEC.		34A62-232								
HP		.5								
VOLTS		230/460								
AMP		2/1								
RPM		3450								
FRAME		56C	HZ			60	PH	3		
SER.F.		1.25	CODE			J	DES	B	CLASS	B
NEMA-NOM-EFF		68	PF			63				
RATING		40C AMB-CONT								
CC			USABLE AT 208V			2.6				
DE		6203	ODE			6203				
ENCL		TEFC	SN							
		SFA 2.4/1.2								

Parts List		
Part Number	Description	Quantity
SA009825	SA 34A62-232	1.000 EA
RA006270	RA 34A62-232	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
34CB3002A	CB CAST W/.88 DIA HOLE	1.000 EA
34GS1029A01	GASKET, CONDUIT BOX	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
34EP3102A01SP	FR ENDPLATE, MACH	1.000 EA
HW5100A03SP	WAVY WASHER (W1543-017)	1.000 EA
34EP3300A24SP	PU ENDPLATE, MACH	1.000 EA
51XN1032A20	10-32 X 1 1/4 HX WS SL SR	2.000 EA
34FN3002A01SP	EXTERNAL FAN, PLASTIC, .637/.639 HUB W/	1.000 EA
34FH4002A01	IEC FH NO GREASER	1.000 EA
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 EA
34CB4517	CB LID 4 MTG HOLES .22 DIA STAMPED, FOR	1.000 EA
34GS1031A01	GASKET, FLAT CONDUIT BOX LID (LEXIDE)	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HW2501D13SP	KEY, 3/16 SQ X 1.375	1.000 EA
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 EA
MG1000G27	PAINT- S9282E CHARCOAL GREY	0.014 GA
10XF0440S02	04-40 X 1/8 TYPE F HEX HD STAINLESS STIC	2.000 EA
HA3100A12	THRUBOLT 10-32 X 7.375	4.000 EA
LB1125C01	STD (STOCK) CARTON LABEL BALDOR WITH FLA	1.000 EA
LC0005E01	CONN.DIA./WARNING LABEL (LC0005/LB1119)	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
NP1256L	ALUM UL CSA CC	1.000 EA
34PA1002	PACKING GROUP, BALDOR	1.000 EA


Performance Data at 460V, 60Hz, 0.5HP (Typical performance - Not guaranteed values)**General Characteristics**


Full Load Torque:	0.75 LB-FT	Start Configuration:	DOL
No-Load Current:	0.9 Amps	Break-Down Torque:	3.4 LB-FT
Line-line Res. @ 25°C.:	35.1 Ohms A Ph / 0.0 Ohms B Ph	Pull-Up Torque:	2.7 LB-FT
Temp. Rise @ Rated Load:	58 C	Locked-Rotor Torque:	3.0 LB-FT
Temp. Rise @ S.F. Load:	69 C	Starting Current:	6.0 Amps

Load Characteristics

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	33.0	44.0	56.0	64.0	70.0	77.0	70.0
Efficiency:	41.4	56.3	64.0	67.2	68.4	68.5	68.4
Speed:	3563.0	3535.0	3501.0	3466.0	3432.0	3381.0	3432.0
Line Amperes:	0.91	0.97	1.01	1.1	1.2	1.33	1.2

Performance Graph at 460V, 60Hz, 0.5HP Typical performance - Not guaranteed values

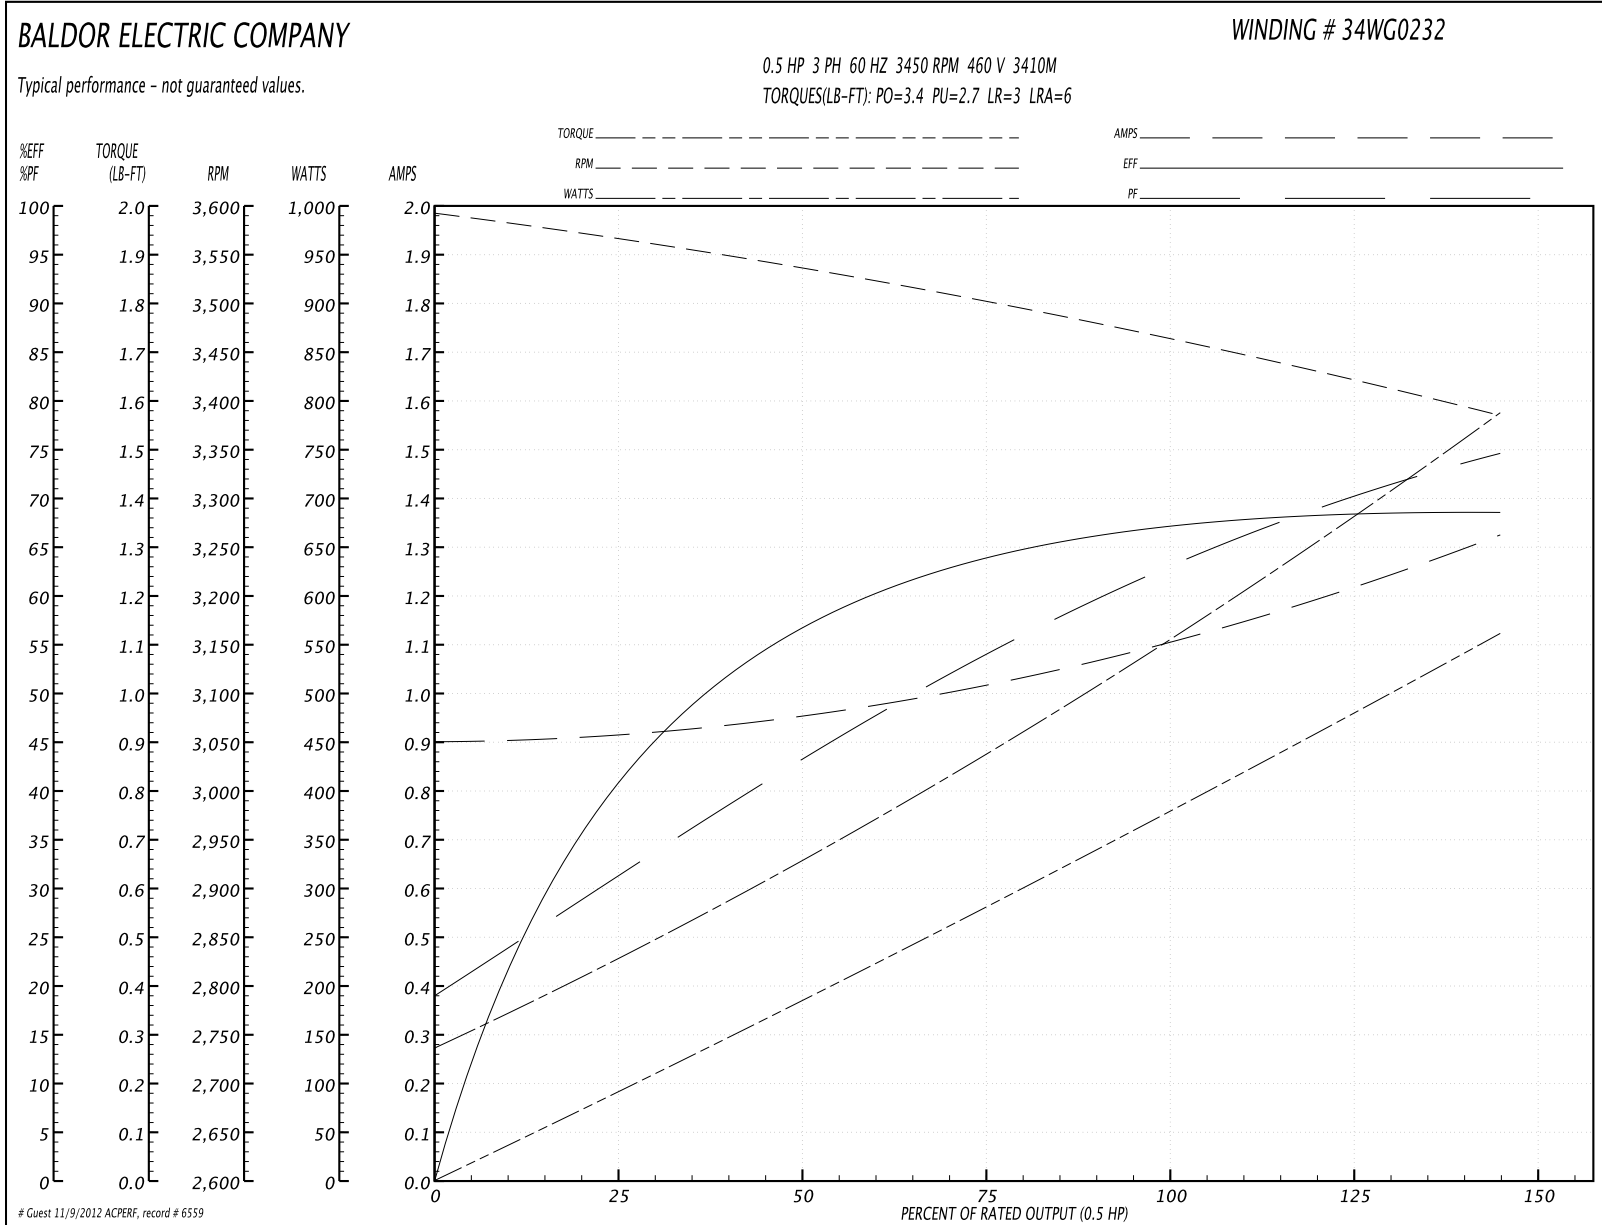


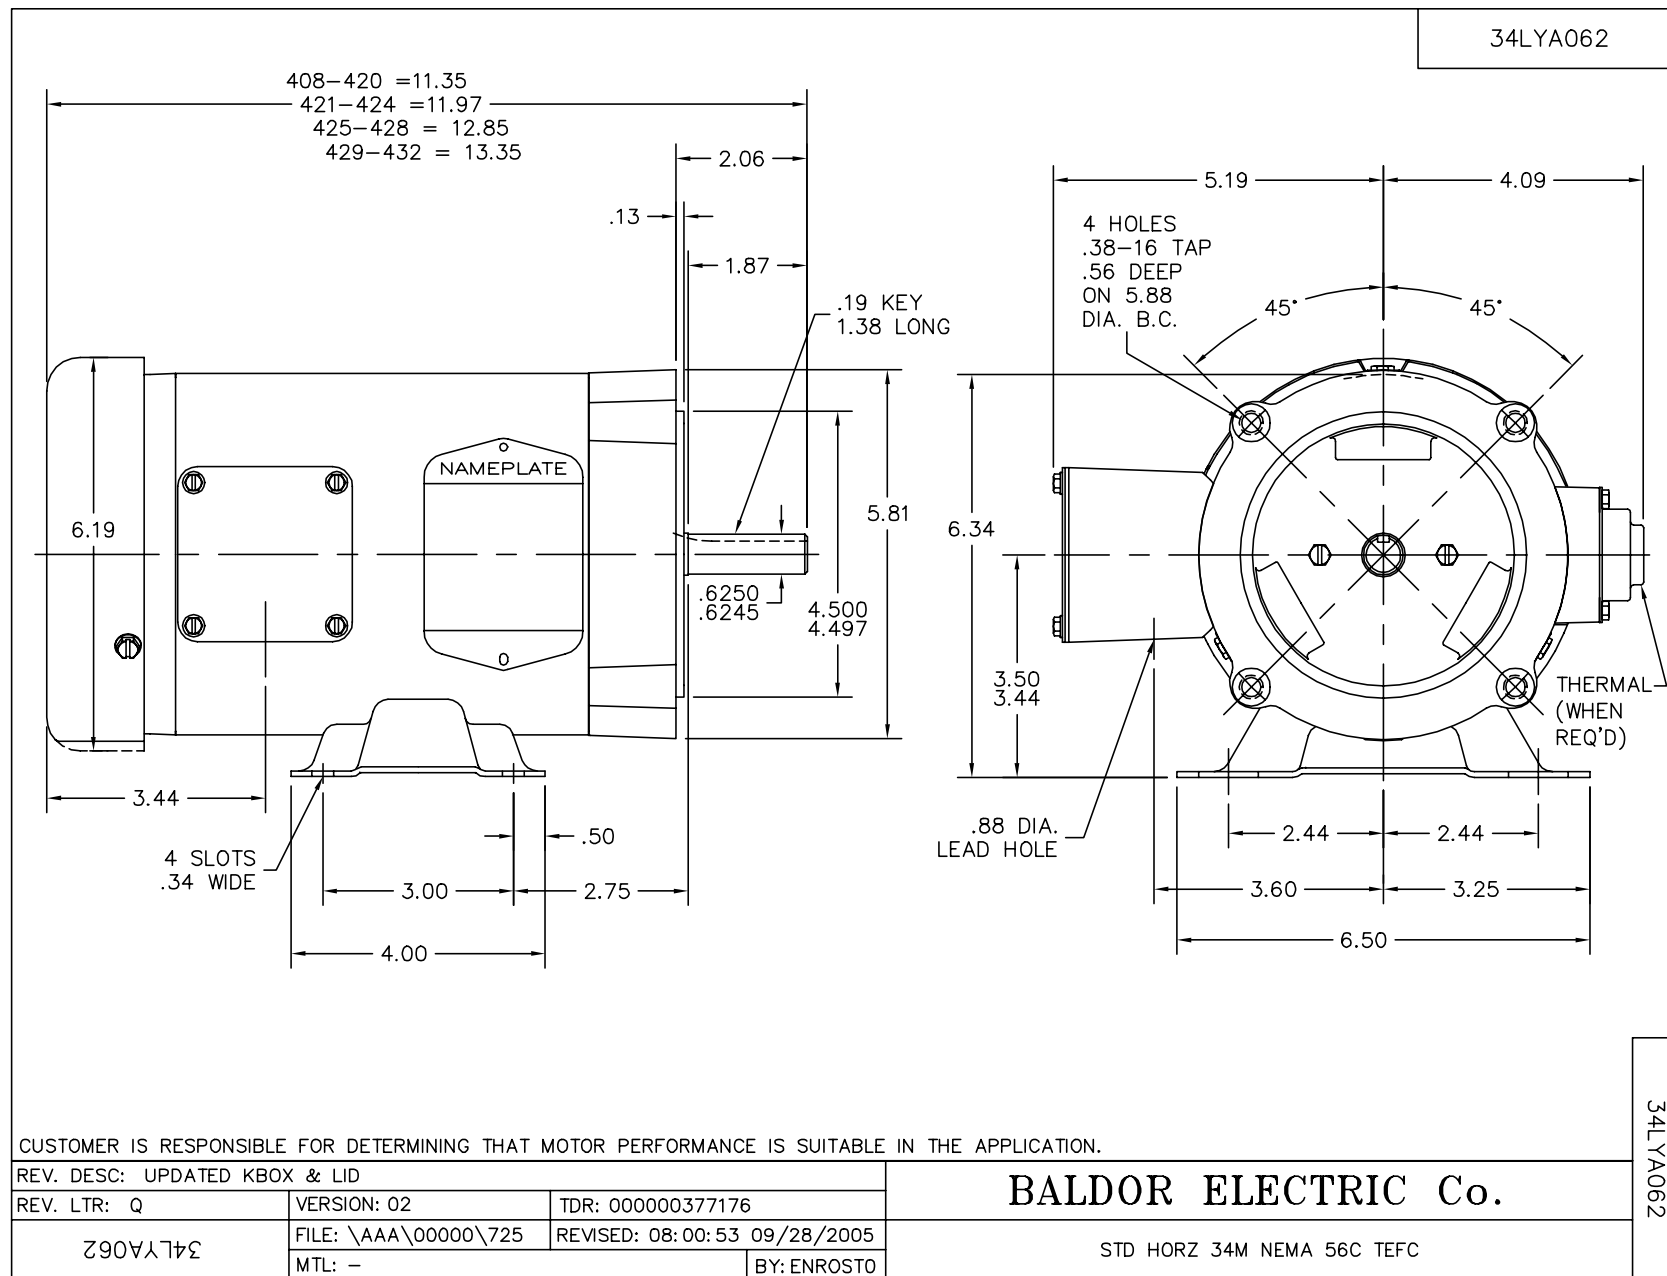

CD0005


 LOW VOLTAGE
(2Y)


LINE

 HIGH VOLTAGE
(1Y)


LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: E

BY: JLP

REVISED: 01/19/99 10:15

TDR: 0171435

9000D0

FILE: AAA00005140

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005