

# **BALDOR® • RELIANCE**


## **Product Information Packet**


### **D5075R-BV**

**75HP, 1750RPM, DC, 2514ATZ, DPG-FV,**

Copyright © All product information within this document is subject to Baldor Electric Company copyright © protection, unless otherwise noted.

Part Detail			
Type:	DC	Prod. Type:	TR
Power Code:	C	Weight:	761
Frame Group:	C 2514ATZ	Mounting Pos.:	F1
HP:	75	Enclosure:	DPFV
RPM:	1750/2100	Wound:	STR. SHUNT
Service Factor:	1.0	Arm V:	500
Arm A:	124.00	Field V:	300
Field A:	6.21	Field A Hot:	4.42/3.42
Insulation Class:	F	Ambient:	40
Duty:	CONT	DE Bearing:	65BC03J30X
ODE Bearing:	50BC02J30X	Brushes:	419904-51AD
Brush Qty.:			

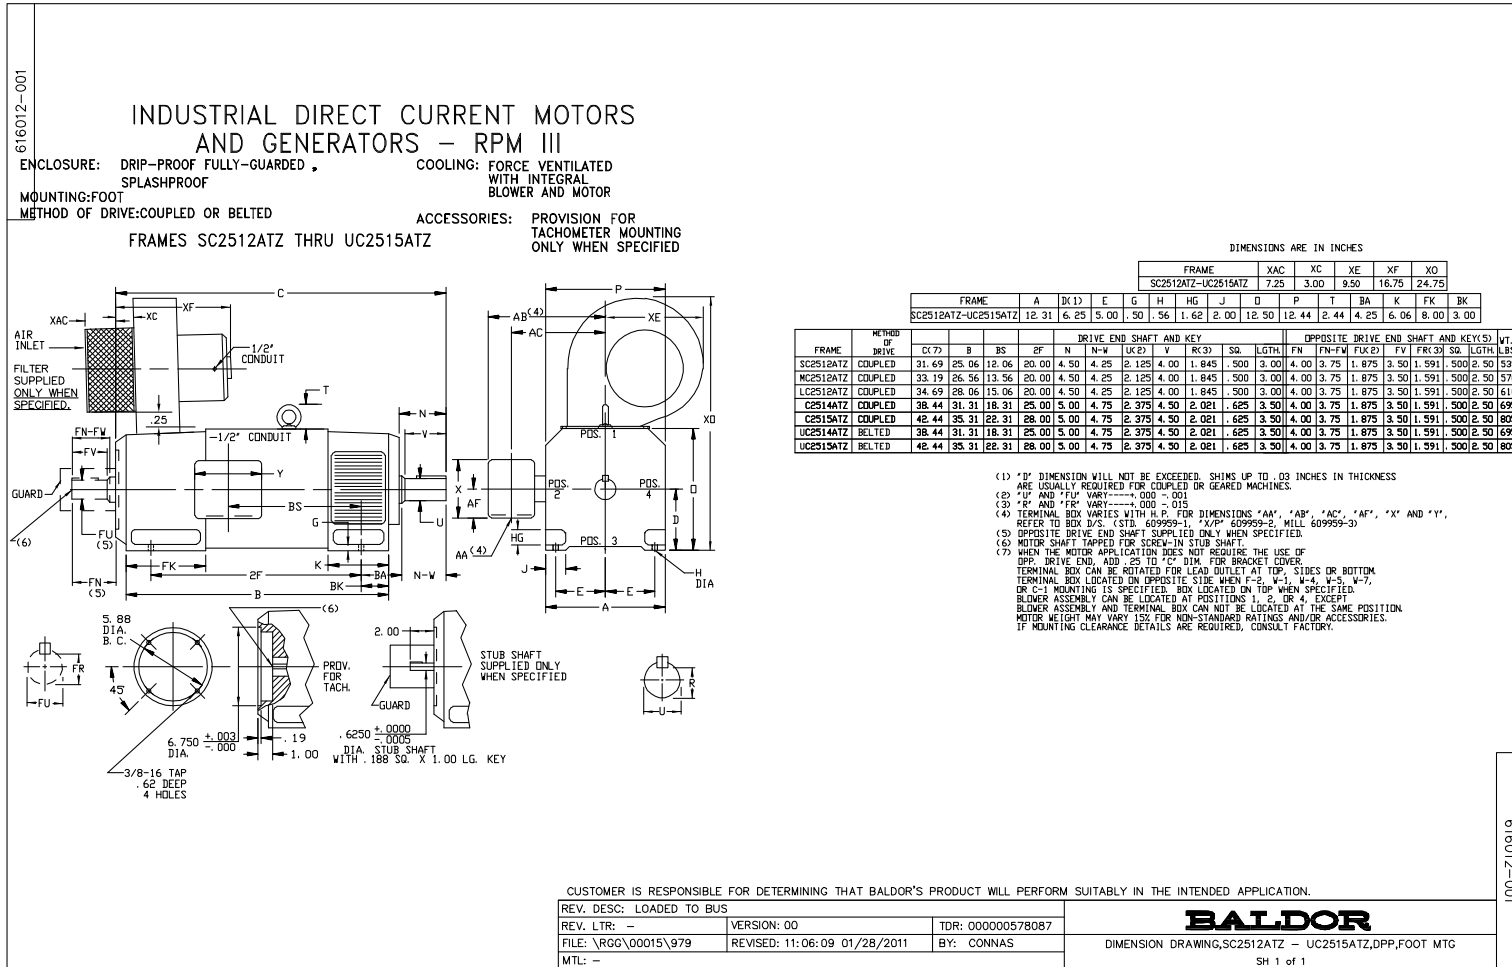


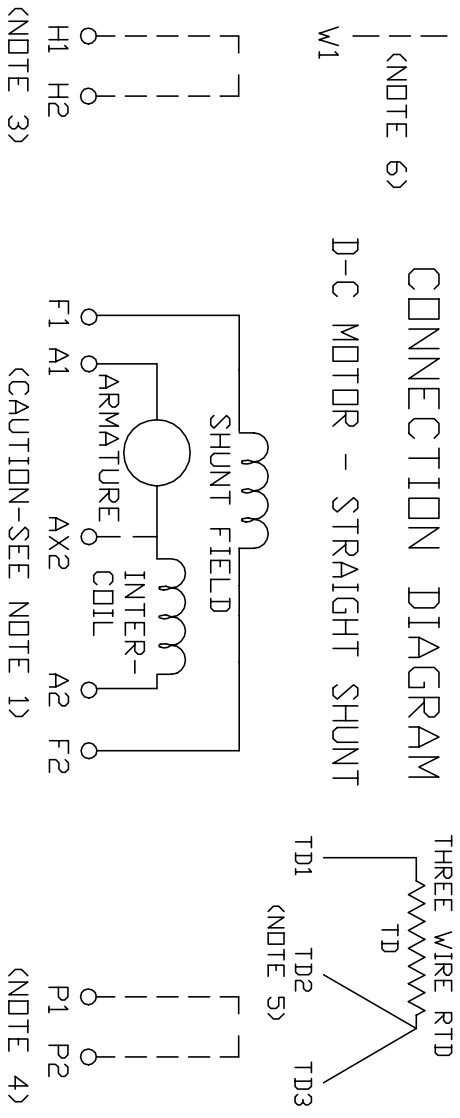

1. **CAUTION** — ARMATURE MAY HAVE MULTIPLE LEADS. CONNECT ALL LUGS WITH THE SAME MARKING TOGETHER.
2. OPTIONAL CONTROL SIGNAL LEAD IS MARKED AX2. ALWAYS TAKE INTERPOLE DROP BETWEEN A2 AND AX2. NOTE: NEMA DESIGNATION FOR AX2 IS LETTER C.
3. SPACE HEATERS, WHEN PROVIDED, WILL HAVE LEADS MARKED H1 AND H2, H3, H4, ETC.
4. THERMAL PROTECTOR, WHEN PROVIDED, WILL HAVE LEADS MARKED P1 AND P2, P3, P4, ETC.
5. WINDING RTD'S, WHEN PROVIDED, WILL HAVE LEAD MARKED W1.
6. BRUSH WEAR SENSOR, WHEN PROVIDED, WILL HAVE LEAD MARKED W1.
7. **WARNING** — MOTOR MUST BE GROUNDED TO PREVENT SERIOUS INJURIES TO PERSONNEL. GROUND THE MOTOR PER IEC, NATIONAL ELECTRICAL CODE AND ANY APPLICABLE LOCAL ELECTRICAL CODES. A TAPPED HOLE IS PROVIDED IN THE CONDUIT BOX, ON THE FOOT, FRAME BRACE OR OPPOSITE OPPOSITE DRIVE END BRACKET, ADJACENT TO THE TERMINAL BOX FOR FOR MOTOR GROUNDING. GROUND LEAD, WHEN PROVIDED, WILL BE GREEN.

CUSTOMER _____ ORDER NO. _____	CUSTOMER _____ RELIANCE S.O. NO. _____
<p>RELIANCE ELECTRIC CLEVELAND, OHIO 44117 U.S.A.</p>	<p>CONNECTION DIAGRAM</p> <p style="font-size: 24pt;"><b>406770-6</b></p> <p>ORIGINAL AT RCC</p>
C/R 244907, 290048, 354478, 354480	REC. BY N.L. EVANS CK. BY N. JESCHKE APP. BY E. J. HINER DATE 5-5-69

REF. S.O.	FRAME C2514ATZ	RATING 75.0HP	BASE SPEED 1750	WINDING TYPE STRAIGHT SHUNT
S.F. ENCL. 1.0 DPEV	AMB°C/INSUL 40/F	DUTY CONT	POWER CODE/FORM FACTOR C	TYPE TR
COOLING AIR (CFM/IN H <sub>2</sub> O) 425/2.0	$\bar{R}$ (sec) .192	$T_r$ (hot) .0691	$T_m$ .0133	WINDER RPM MAX. SAFE 4500
RESISTANCE	BASIC RPM 2500		MAX CONT RPM 2600	WINDING TYPE STRAIGHT SHUNT
WINDING	VOLTS	CURRENT		INDUCTANCE
ARM CIRCUIT	500	25°C .179	HOT .240	PER COIL 4.18 mH
SERIES S1-S2	-	-		-
SHUNT F1-F2	300	48.3	66.0	11.9 H
			6.21	4.55
				6.45

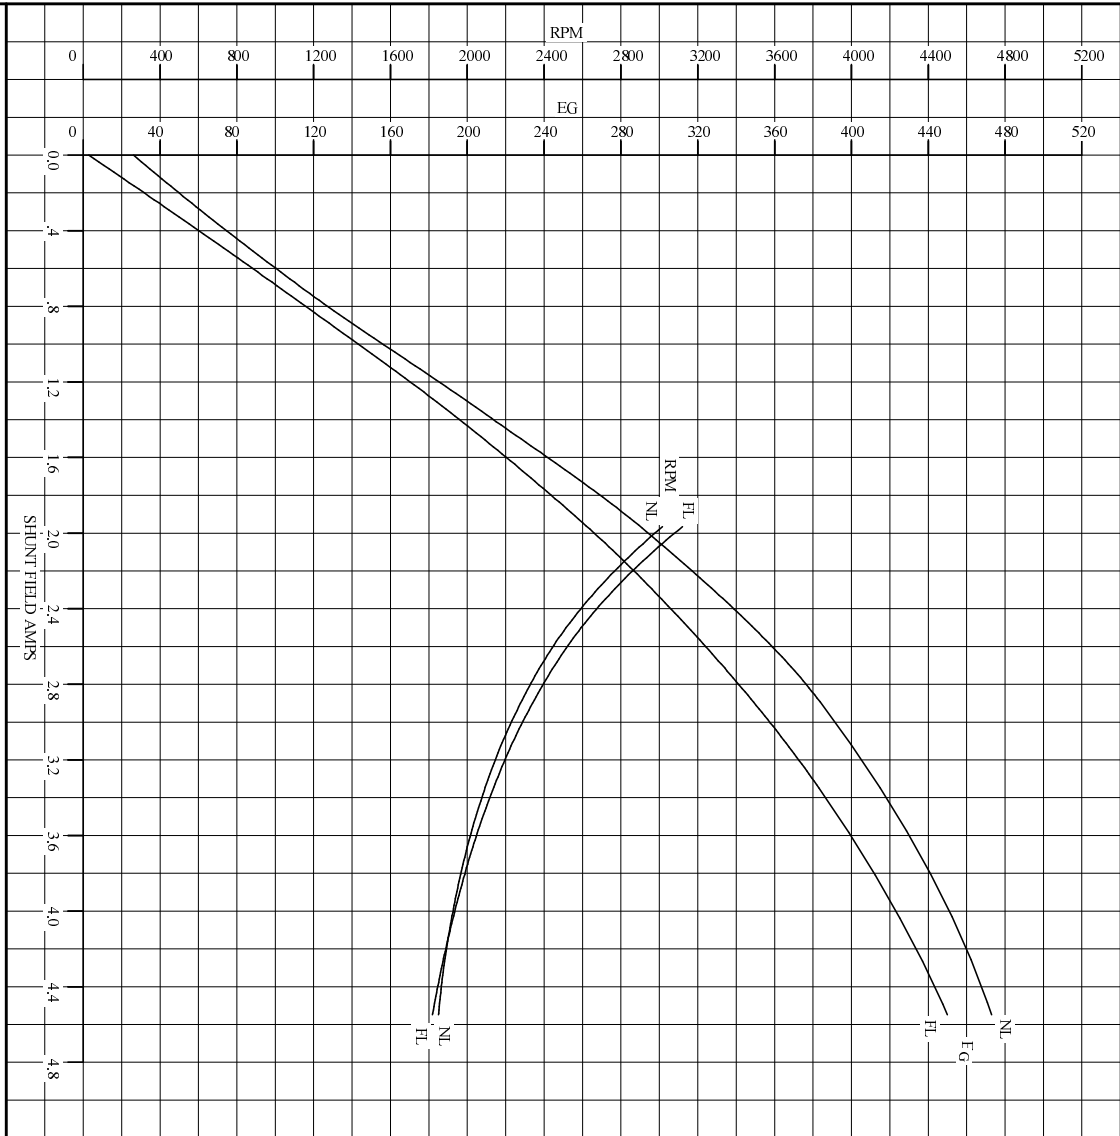

REMARKS: TYPICAL DATA SPEED REGULATOR REQUIRED FOR STABILITY  
CURVES VALID FOR NAMEPLATE SPEED RANGE ONLY

**D-C**  
**APPLICATION DATA**

DR. BY E. GILLOT	DATE 0-11-94
CK. BY R. RELANCHER	ISSUE DATE 08-20-2007
APP. BY R. RELANCHER	


REL. S.O.	FRAME	RATING	RPM	ARM. VOLTS	ARM. AMPS
	C2514ATZ	75.0HP	1750	500	124
WINDING TYPE		S.F.	ENCL.	AMB °C/INSUL	DUTY
STRAIGHT SHUNT		1.0	DPFV	40/F	CONT
					300
POWER CODE		TYPE	WK <sup>2</sup> (LB-FT <sup>2</sup> )	HOT ARM.CIR.RES.	FLD. AMPS@25 °C
C		TR	7.635	.239	6.21
					HOT FIELD RES
					65.9

ARM. CIR. IND. (mh)	FIELD IND. (H)	COOLING AIR(CFM/IN H 20)	TURNS PER COIL SHUNT/SERIES	TEST DATE
4.18	11.9	425/2.0	645/.00000	-

LOAD PERFORMANCE					
LOAD	AMPERES	TORQUE IN LB.-FT.	OUTPUT IN HP	RPM	% EFFICIENCY
NO LOAD	2.4	0	0	1843	0
1/4	31	53.8	18.7	1825	81.8
2/4	62	111	38.3	1813	87.9
3/4	93	166	57.2	1809	88.9
4/4	124	218	75.4	1813	88.5
O.L.	186	312	109	1844	86.3

RPM VS. FIELD AMPS			Eg VS. FIELD AMPS		
FIELD AMPS	RPM N.L.	RPM F.L.	Eg N.L. @ BASE SPEED	Eg F.L. @ BASE SPEED	
4.54	1843	1813	472	449	
3.90	1944	1959	446	417	
3.25	2124	2172	410	376	
2.61	2440	2514	359	325	
1.96	3015	3120	290	262	

REMARKS: TYPICAL DATA  
 MAXIMUM SAFE SPEED = 4500 RPM  
 SPEED REGULATOR REQUIRED FOR STABILITY

	DR. BY E. GILLIOT	<b>D-C MOTOR PERFORMANCE DATA</b> D68289A ISSUE DATE 08-20-2007
	CK. BY R. BRANCHER APP. BY R. BRANCHER DATE 05-13-94	

