

BALDOR® • *RELIANCE*

Product Information Packet

EHM2535T-8

30HP, 1770RPM, 3PH, 60HZ, 286T, 4052M, OPSB, F1

Copyright © All product information within this document is subject to Baldor Electric Company copyright © protection, unless otherwise noted.

Part Detail							
Revision:	E	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	4052M	Elec. Spec:	40WGW491	CD Diagram:	
Enclosure:	OPSB	Mfg Plant:		Mech. Spec:	40J098	Layout:	
Frame:	286T	Mounting:	F1	Poles:	04	Created Date:	10-22-2010
Base:	RG	Rotation:	R	Insulation:	F	Eff. Date:	04-19-2012
Leads:	3#6	Literature:		Elec. Diagram:		Replaced By:	

Nameplate NP2094E06B03

CAT.NO.	EHM2535T-8						
SPEC.	40J098W491G1						
HP	30						
VOLTS	200						
AMPS	81						
RPM	1770						
FRAME	286T	HZ			60	PH	3
SER.F.	1.15	CODE			G	DES	B CL F
NEMA-NOM-EFF	94.1	PF			85		
RATING	40C AMB-CONT						
CC	010A	USABLE AT 208V					
DE	6311	ODE			6309		
AUTO		MANUAL				NONE	
ENCL	OPSB	SN					
BLANK							


Parts List		
Part Number	Description	Quantity
SA205148	SA 40J098W491G1	1.000 EA
RA192392	RA 40J098W491G1	1.000 EA
S/P107-000-006	SUPER-E(284 FR. & UP)-ZK PLANT,POLYREX E	1.000 EA
HA6361A01	LIFTING LUG FOR 37, 39 & 40 FRAME (AUTOP	2.000 EA
40CB4000A01	CONDUIT BOX 40, STAMPED	1.000 EA
51XF2520A08	SCREW, HEX SER SLT HD, ZN 1/4-20 X .50 L	2.000 EA
WD1000B16	KPA-4C BURNDY TERMINAL	1.000 EA
40EP3200A02	STD FREP OPEN 309 BRG	1.000 EA
HW5100A11	W3917-042 WVY WSHR (WB)	1.000 EA
40EP3200B31	PUEP OPEN 311 BRG W/SH GND MTG	1.000 EA
84XN0540J08	5-40 X 1/2" SHCS, BLACK OXIDE	2.000 EA
XY3816A12	3/8-16 FINISHED NUT	8.000 EA
39CB4500A01	CONDUIT BOX LID 39, STAMPED, AUTOPHORETI	1.000 EA
51XF2520A08	SCREW, HEX SER SLT HD, ZN 1/4-20 X .50 L	2.000 EA
HW2501H28	KEY, 1/2 SQ X 3.250	1.000 EA
LB5040	INSTRUCTION TAG, AC & DC	1.000 EA
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 EA
HW4500A20	1/8NPT SL PIPE PLUG	2.000 EA
MJ1000A75	GREASE, POLYREX EM EXXON	0.050 LB
HW4500A20	1/8NPT SL PIPE PLUG	2.000 EA
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 EA
MG1000G27	PAINT- S9282E CHARCOAL GREY	0.070 GA
HA3154A04	THRUBOLT STUD 3/8-16 X 18.750	4.000 EA
40AD2002A01	LEXAN BAFFLE 40 FR OPEN	1.000 EA


Parts List (continued)		
Part Number	Description	Quantity
40AD2002A01	LEXAN BAFFLE 40 FR OPEN	1.000 EA
LB1125C02	SUPER-E (STOCK CTN LABEL SUPER-E WITH FL	4.000 EA
LB1357	ENERGY GUIDE LABEL (BOX LABEL)	1.000 SH
LC0006	CONNECTION LABEL	1.000 EA
NP2094E06B03	NP LABEL W/BARCODE (PREM EFF HVAC MTR)	1.000 EA
40PA1000	PACKAGING GROUP	1.000 EA

Performance Data at 200V, 60Hz, 30.0HP (Typical performance - Not guaranteed values)

General Characteristics							
Full Load Torque:	88.9 LB-FT			Start Configuration:	DOL		
No-Load Current:	30.6 Amps			Break-Down Torque:	272.0 LB-FT		
Line-line Res. @ 25°C.:	0.0423 Ohms A Ph / 0.0 Ohms B Ph			Pull-Up Torque:	127.0 LB-FT		
Temp. Rise @ Rated Load:	31 C			Locked-Rotor Torque:	149.0 LB-FT		
Temp. Rise @ S.F. Load:	40 C			Starting Current:	514.0 Amps		
Load Characteristics							
% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	50.0	72.0	82.0	85.0	87.0	87.0	86.0
Efficiency:	90.3	93.6	94.2	94.1	93.6	92.7	93.8
Speed:	1792.0	1785.0	1777.0	1769.0	1761.0	1752.0	1764.0
Line Amperes:	35.7	47.7	63.0	80.3	99.0	119.8	91.3

Performance Graph at 200V, 60Hz, 30.0HP Typical performance - Not guaranteed values

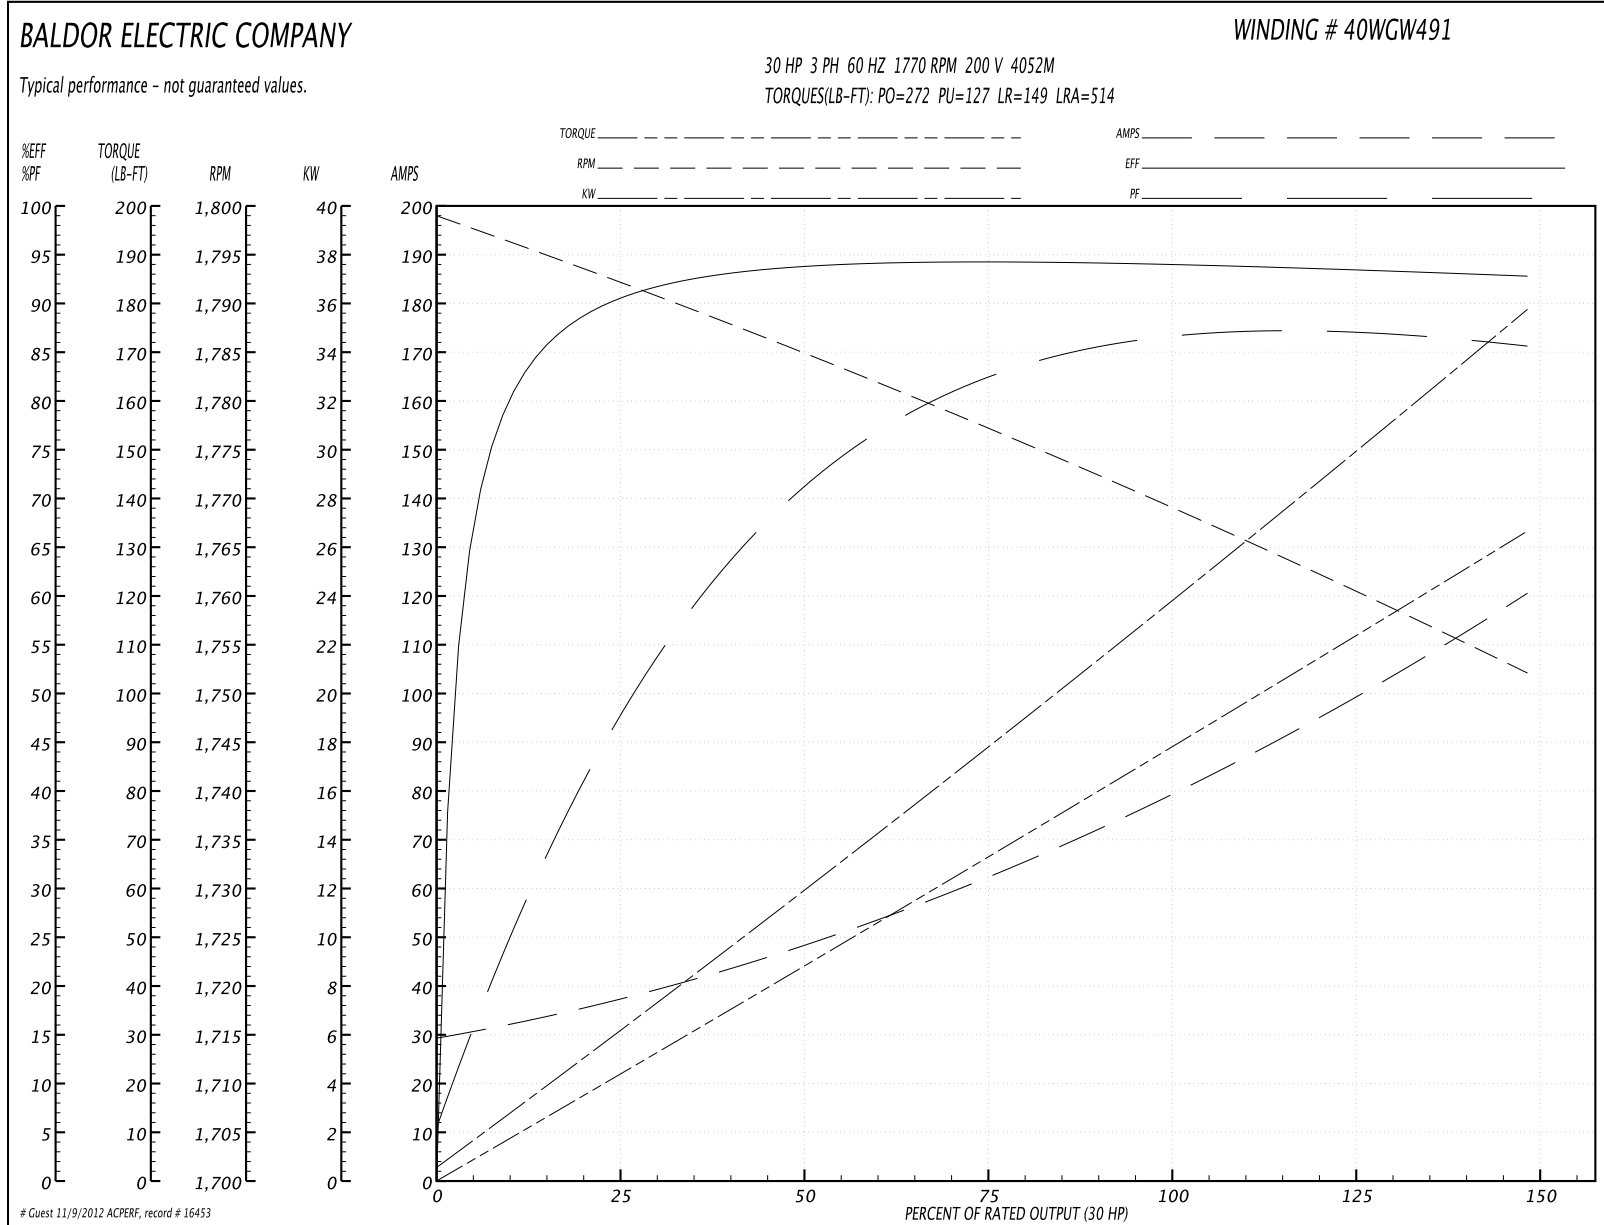

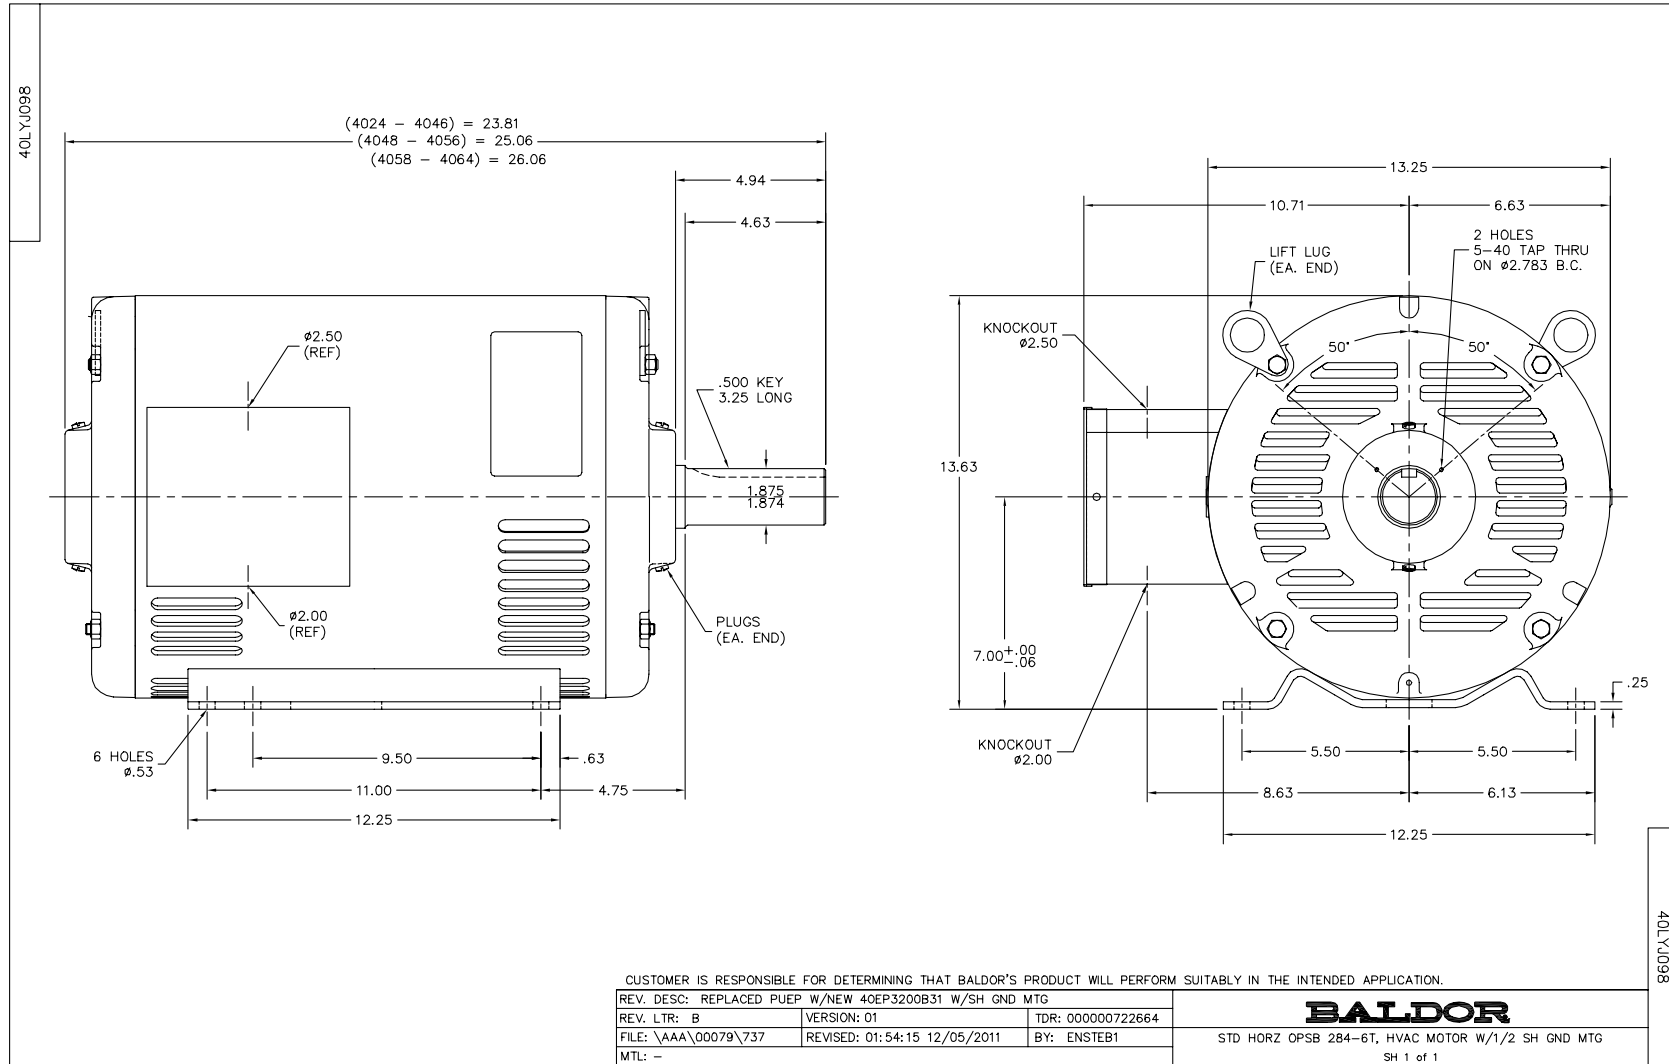

CD0006



NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: D	BY: JLP	REVISED: 01/21/99 4:02	TDR: 0171435
9000D		FILE: AAA00005141	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

CD0006