

BALDOR® • RELIANCE

Product Information Packet

EM2559T-4

125HP,1775RPM,3PH,60HZ,405T,4488M,OPSB,F

Copyright © All product information within this document is subject to Baldor Electric Company copyright © protection, unless otherwise noted.

Part Detail									
Revision:	A	Status:	PRD/A	Change #:		Proprietary:	No		
Type:	AC	Prod. Type:	4488M	Elec. Spec:	44WGW047	CD Diagram:			
Enclosure:	OPSB	Mfg Plant:		Mech. Spec:	44E195	Layout:			
Frame:	405T	Mounting:	F1	Poles:	04	Created Date:	08-06-2009		
Base:	RG	Rotation:	R	Insulation:	F	Eff. Date:	01-03-2012		
Leads:	6#6	Literature:		Elec. Diagram:		Replaced By:			
Nameplate NP2138L									
CAT.NO.	EM2559T-4	P/N		ENCLOSURE			OPSB		
SPEC.	44E195W047	CC	010A	FRAME			405T	S/N	
HP	125	CLASS	F	HZ			60		
RPM	1775	PH	3	DES			B		
VOLT	460	KVA-CODE	G	ODE BRG			6312	DE BRG	6316
AMP	143	USABLE AT 208V							
RATING	40C AMB-CONT	GREASE	POLYREX EM						
NEMA-NOM-EFF	95.4	PF	86	SER.F.			1.15		
HTR-VOLTS		HTR-AMPS		MAX. SPACE HEATER TEMP.					

Parts List		
Part Number	Description	Quantity
SA184568	SA 44E195W047	1.000 EA
RA172401	RA 44E195W047	1.000 EA
S/P107-000-004	SUPER-E(284 FR. & UP)-CL PLANT,POLYREX E	1.000 EA
HA6731	LIFTING LUG FOR 44 FRAME MOTORS.	2.000 EA
HA6648A01	CAST ADAPTER, 44 FRAME - NEMA 404-5 - MA	1.000 EA
19XW3816A12	.38-16 X .75 HEX WASHER HEAD TAPTITE II	2.000 EA
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	2.000 EA
18CB1006A04	CB 318 3.62 LD HOLE, .38 MTG HOLE & 3.88	1.000 EA
19XW3118A16	.31-18 HEX WASHER HEAD TAPTITE II 1.00 L	4.000 EA
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	4.000 EA
WD1000B25	BURNDY TERMINAL L125HP	1.000 EA
10XN3118K08	5/16-18 X .50 GRADE #5, STL, ZINC PLATE	1.000 EA
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	1.000 EA
44EP1203A02	FREP, MACH	1.000 EA
HW5100A15	W4997-050 WVY WSHR (WB)	1.000 EA
10XN3816K48	3/8-16 X 3 HEX HD CAP SCREW,Z/P	4.000 EA
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	4.000 EA
44EP1202A01	PU ENDPLATE, MACH.	1.000 EA
XY5013A12	NUT,1/2-13,HEX,STEEL,ZINCPLATED	8.000 EA
18CB1506A01	CB LID 318 FOR 18CB1006	1.000 EA
10XN3118K16	5/16-18 X 1" GRADE #5, STL, ZINC PLATE	4.000 EA
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	4.000 EA
HW2501K66	KEY, 3/4 SQ X 5.625	1.000 EA
LB1115	LABEL,LIFTING DEVICE	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
LB5040	INSTRUCTION TAG, AC & DC	1.000 EA
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 EA
44AD2003A01	BAFFLE PLATE 44 OPSB, "X" = -.470, "Y" =	1.000 EA
HW4500A03	GREASE FITTING, .125 NPT 1610(ALEMITE) 8	1.000 EA
HW4500A20	1/8NPT SL PIPE PLUG	1.000 EA
MJ1000A75	GREASE, POLYREX EM EXXON	0.030 LB
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 EA
44AD2003A01	BAFFLE PLATE 44 OPSB, "X" = -.470, "Y" =	1.000 EA
HW4500A03	GREASE FITTING, .125 NPT 1610(ALEMITE) 8	1.000 EA
HW4500A20	1/8NPT SL PIPE PLUG	1.000 EA
HA3175A03	THRUBOLT STUD 1/2-13 X 24.250 - GRADE 2	4.000 EA
MG1000Y03	WILKO 689.710 GOLD PAINT SUPER E	0.080 GA
85XU0407A04	#4-7 X 1/4 DRIVE PIN	4.000 EA
LB1119	WARNING LABEL	1.000 EA
LB1125C02	SUPER-E (STOCK CTN LABEL SUPER-E WITH FL	4.000 EA
LB1357	ENERGY GUIDE LABEL (BOX LABEL)	1.000 SH
LC0382	CONNECTION LABEL	1.000 EA
NP2138L	ALUM SUPER-E UL CSA-EEV PREM CC (300	1.000 EA
44PA1000	PK GP COMB PRINT 39-3/8X31X23-7/8	1.000 EA

Accessories		
Part Number	Description	Multiplier
44-1402	C FACE KIT 44/404-5UC TC 6316 BRG	A8


Performance Data at 460V, 60Hz, 125.0HP (Typical performance - Not guaranteed values)
General Characteristics


Full Load Torque:	369.0 LB-FT	Start Configuration:	DOL
No-Load Current:	46.0 Amps	Break-Down Torque:	1004.0 LB-FT
Line-line Res. @ 25°C.:	0.0379 Ohms A Ph / 0.0 Ohms B Ph	Pull-Up Torque:	454.0 LB-FT
Temp. Rise @ Rated Load:	48 C	Locked-Rotor Torque:	540.0 LB-FT
Temp. Rise @ S.F. Load:	64 C	Starting Current:	914.0 Amps


Load Characteristics

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	56.0	77.0	84.0	86.0	87.0	86.0	87.0
Efficiency:	93.5	95.5	95.7	95.4	94.9	94.1	95.1
Speed:	1794.0	1789.0	1783.0	1777.0	1770.0	1762.0	1773.0
Line Amperes:	56.3	79.8	109.4	142.6	177.7	216.0	163.7

Performance Graph at 460V, 60Hz, 125.0HP Typical performance - Not guaranteed values

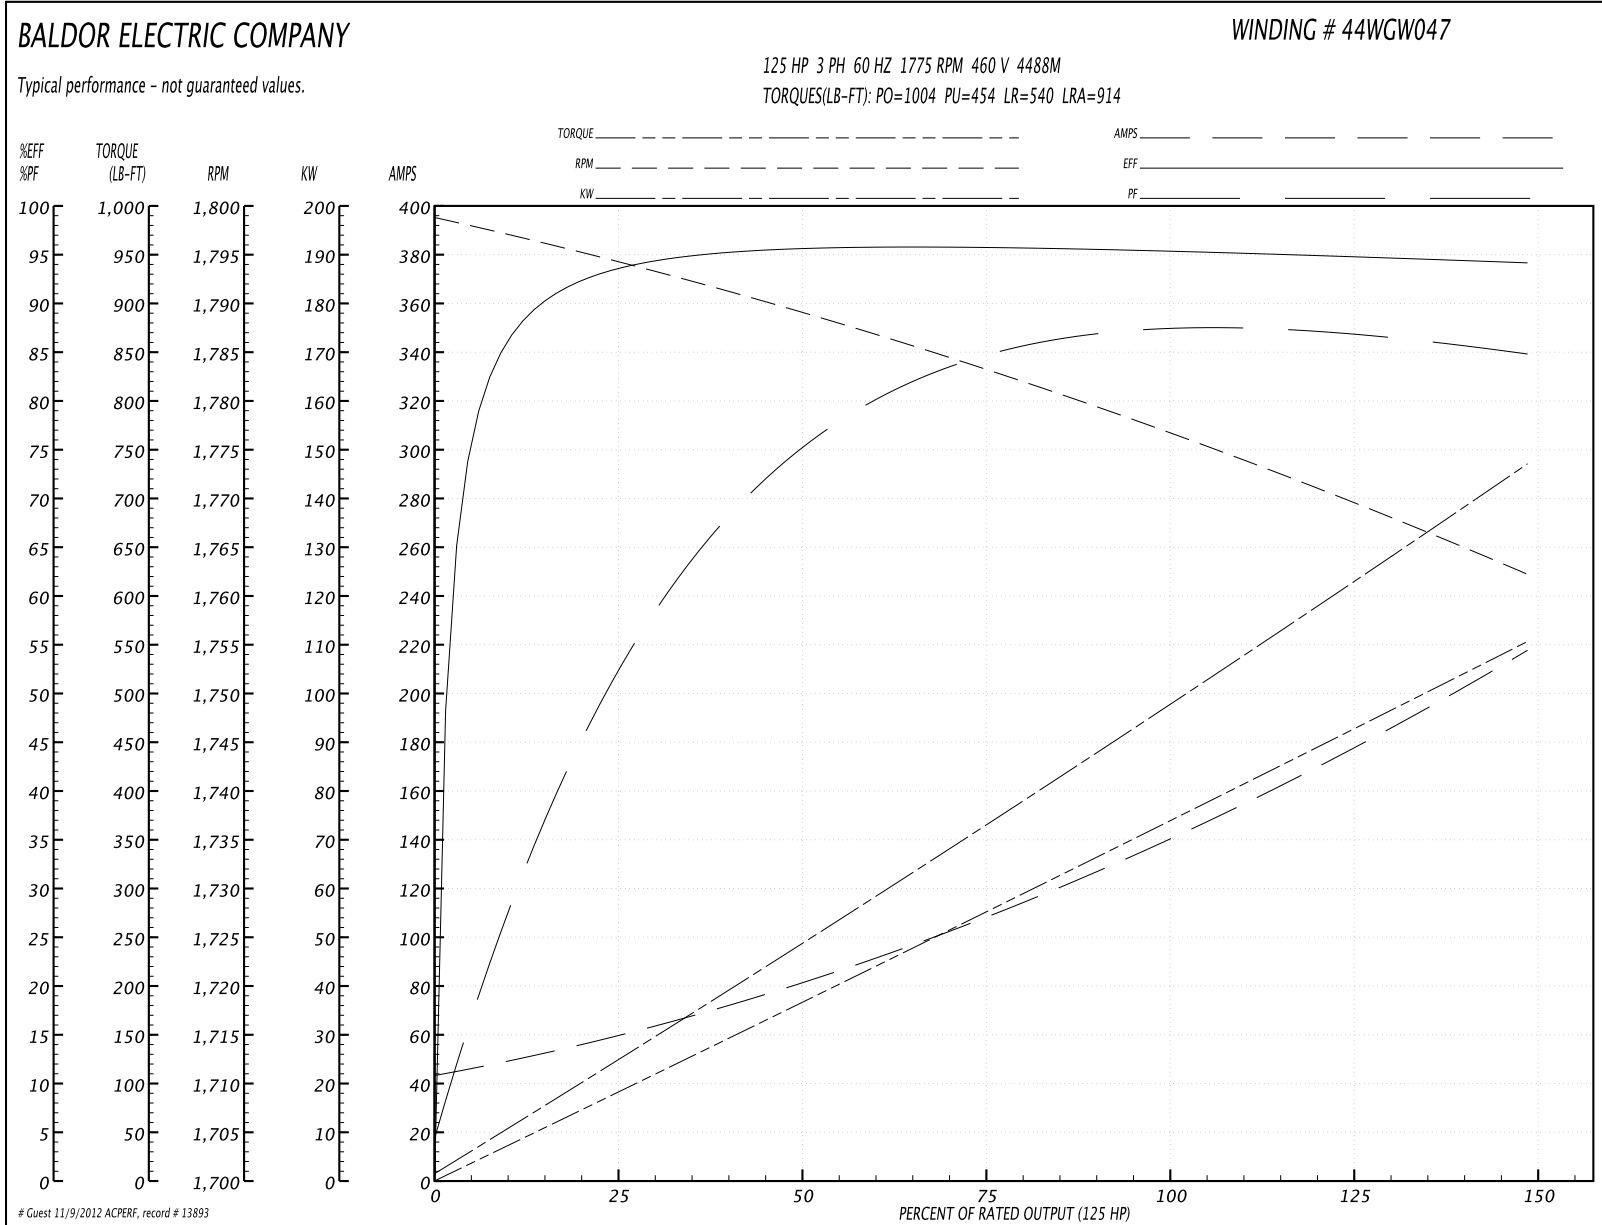

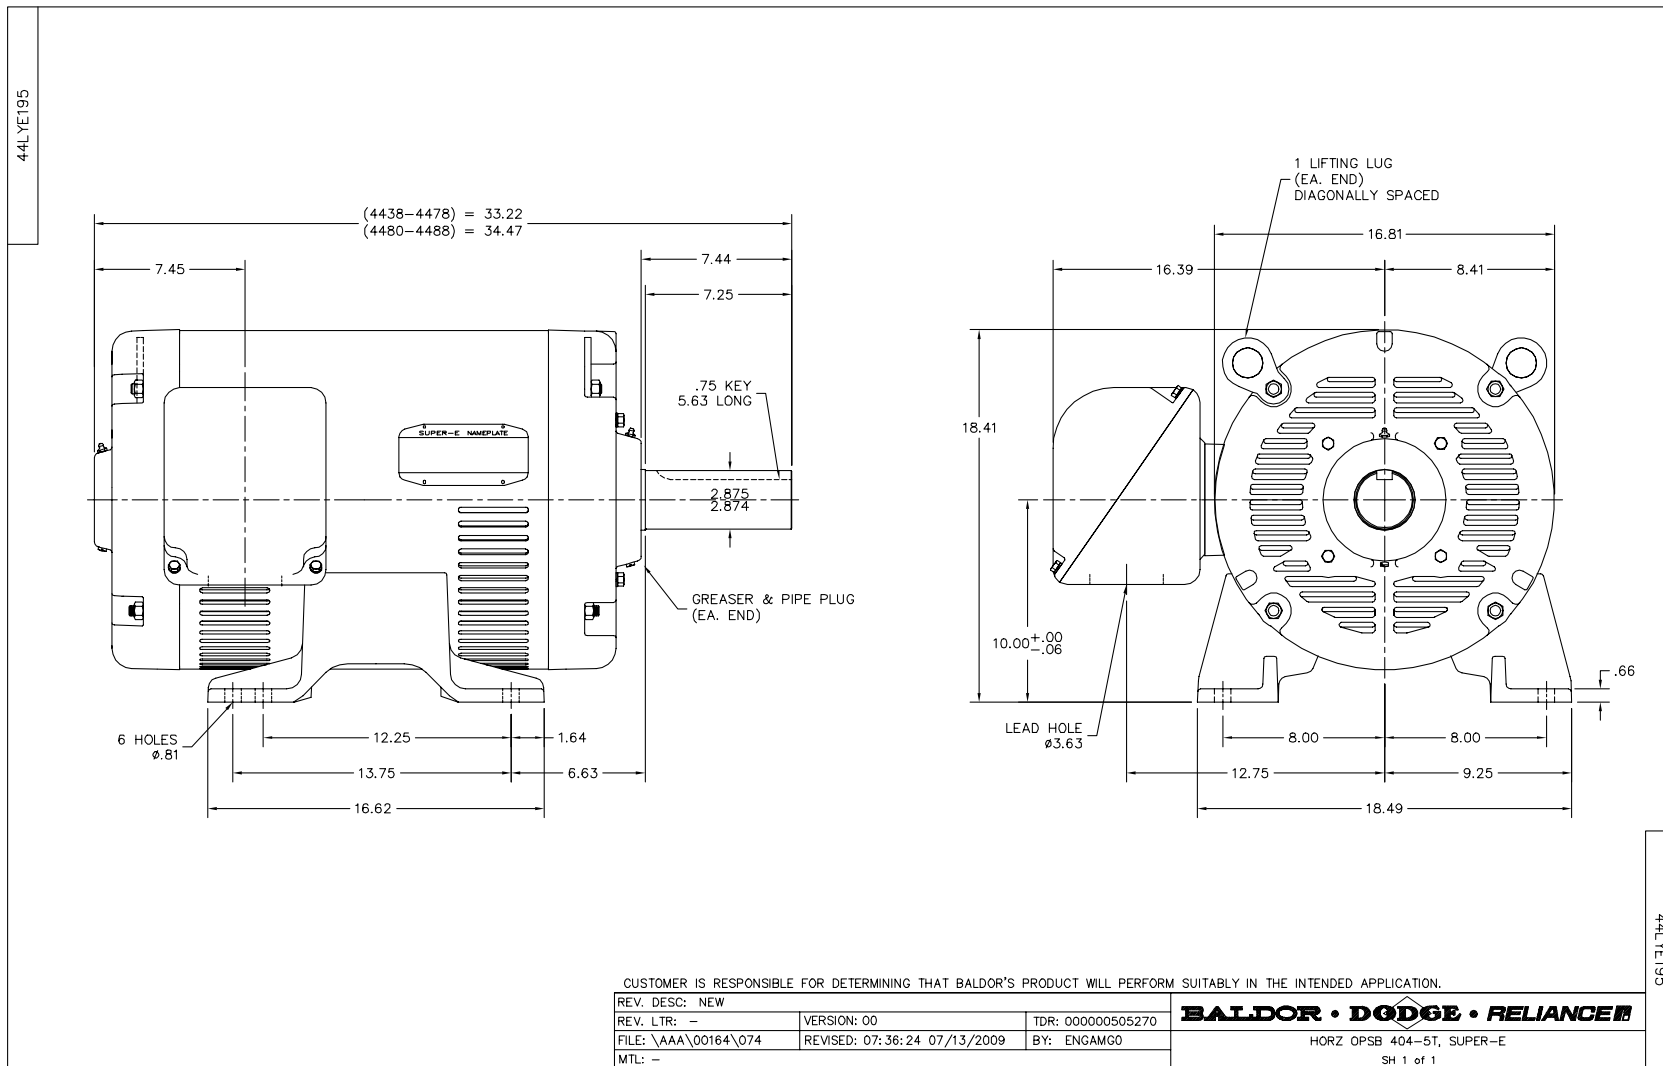

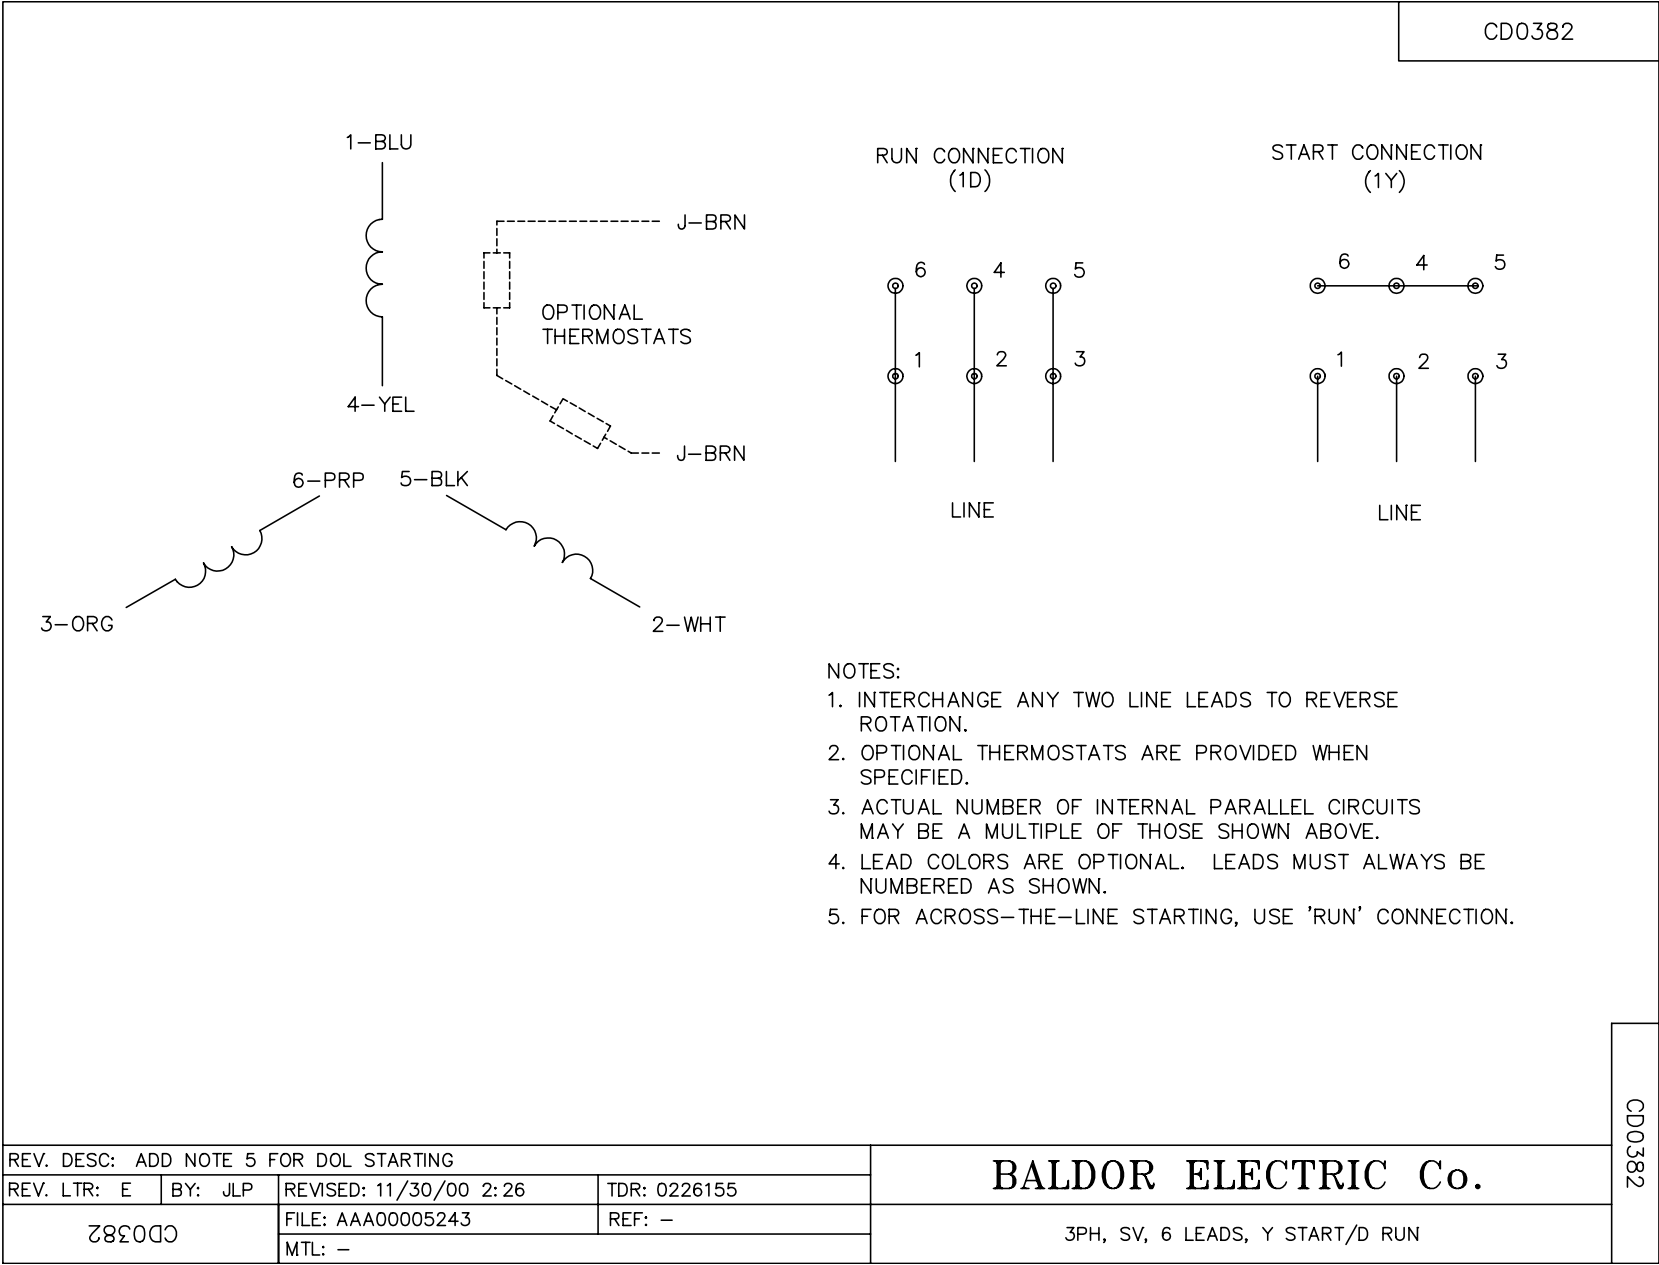

CD0382