

BALDOR® • RELIANCE

Product Information Packet

EM3154T-5

1.5HP,1755RPM,3PH,60HZ,145T,3522M,OPSB,F

Copyright © All product information within this document is subject to Baldor Electric Company copyright © protection, unless otherwise noted.

Part Detail										
Revision:	A	Status:	PRD/A	Change #:		Proprietary:	No			
Type:	AC	Prod. Type:	3522M	Elec. Spec:	35WGM945	CD Diagram:				
Enclosure:	OPSB	Mfg Plant:		Mech. Spec:	35BB101	Layout:				
Frame:	145T	Mounting:	F1	Poles:	04	Created Date:	11-24-2010			
Base:	RG	Rotation:	R	Insulation:	F	Eff. Date:	03-14-2011			
Leads:	3#18	Literature:		Elec. Diagram:		Replaced By:				
Nameplate NP1259L										
CAT.NO.	EM3154T-5									
SPEC.	35BB101M945G1									
HP	1.5									
VOLTS	575									
AMP	1.8									
RPM	1755									
FRAME	145T	HZ				60	PH	3		
SER.F.	1.15	CODE				L	DES	B	CL	F
NEMA-NOM-EFF	86.5	PF				72				
RATING	40C AMB-CONT									
CC	010A	USABLE AT 208V								
DE	6205	ODE				6203				
ENCL	OPSB	SN								

Parts List		
Part Number	Description	Quantity
SA212884	SA 35BB101M945G1	1.000 EA
RA200113	RA 35BB101M945G1	1.000 EA
S/P107-000-001	SUPER E PROC'S-FS & WS PLTS-POLYREX EM G	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
35CB3009	35 CB CASTING W/1.09 DIA. LEAD HOLE @ 6:	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
35EP3201A01	STD FR ENDPLATE-OPEN-203 BRG W/GREASER	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
HW5100A03SP	WAVY WASHER (W1543-017)	1.000 EA
35EP3200A01	STD PU ENDPLATE-OPEN-205 BRG W/GREASER	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 EA
35CB4521	35 LIPPED CB LID (GALV & PHOSPH)	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HW2501D13SP	KEY, 3/16 SQ X 1.375	1.000 EA
HA7000A01	KEY RETAINER 7/8" DIA SHAFT	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
MJ1000A75	GREASE, POLYREX EM EXXON	0.050 LB
MG1000Y03	WILKO 689.710 GOLD PAINT SUPER E	0.017 GA
35AD2005A01	BAFFLE PLATE,MOD 35-SLTD BAND MTRS TDR	2.000 EA
HA3100A45	THRUBOLT 10-32 X 8.875	4.000 EA
LB1119	WARNING LABEL	1.000 EA
LB1125C02	SUPER-E (STOCK CTN LABEL SUPER-E WITH FL	1.000 EA


Parts List (continued)		
Part Number	Description	Quantity
LC0006	CONNECTION LABEL	1.000 EA
LB1357	ENERGY GUIDE LABEL (BOX LABEL)	1.000 SH
NP1259L	ALUM SUPER-E UL CSA-EEV CC NEMA PREMIUM	1.000 EA
PA1000	PACKING GROUP 3500 SHORT	1.000 EA


Accessories		
Part Number	Description	Multiplier
35-8764	C FACE KIT	A8
35EP1604A01SP	D-FLANGE KIT	A8

Performance Data at 575V, 60Hz, 1.5HP (Typical performance - Not guaranteed values)




General Characteristics							
Full Load Torque:		4.46 LB-FT		Start Configuration:		DOL	
No-Load Current:		1.14 Amps		Break-Down Torque:		17.6 LB-FT	
Line-line Res. @ 25°C.:		17.4 Ohms A Ph / 0.0 Ohms B Ph		Pull-Up Torque:		10.8 LB-FT	
Temp. Rise @ Rated Load:		34 C		Locked-Rotor Torque:		12.5 LB-FT	
Temp. Rise @ S.F. Load:		40 C		Starting Current:		14.0 Amps	
Load Characteristics							
% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	32.0	50.0	64.0	72.0	78.0	81.0	76.0
Efficiency:	74.7	83.3	85.9	86.5	86.0	85.1	86.2
Speed:	1790.0	1780.0	1769.0	1758.0	1746.0	1733.0	1751.0
Line Amperes:	1.2	1.34	1.54	1.79	2.09	2.44	1.97

Performance Graph at 575V, 60Hz, 1.5HP Typical performance - Not guaranteed values

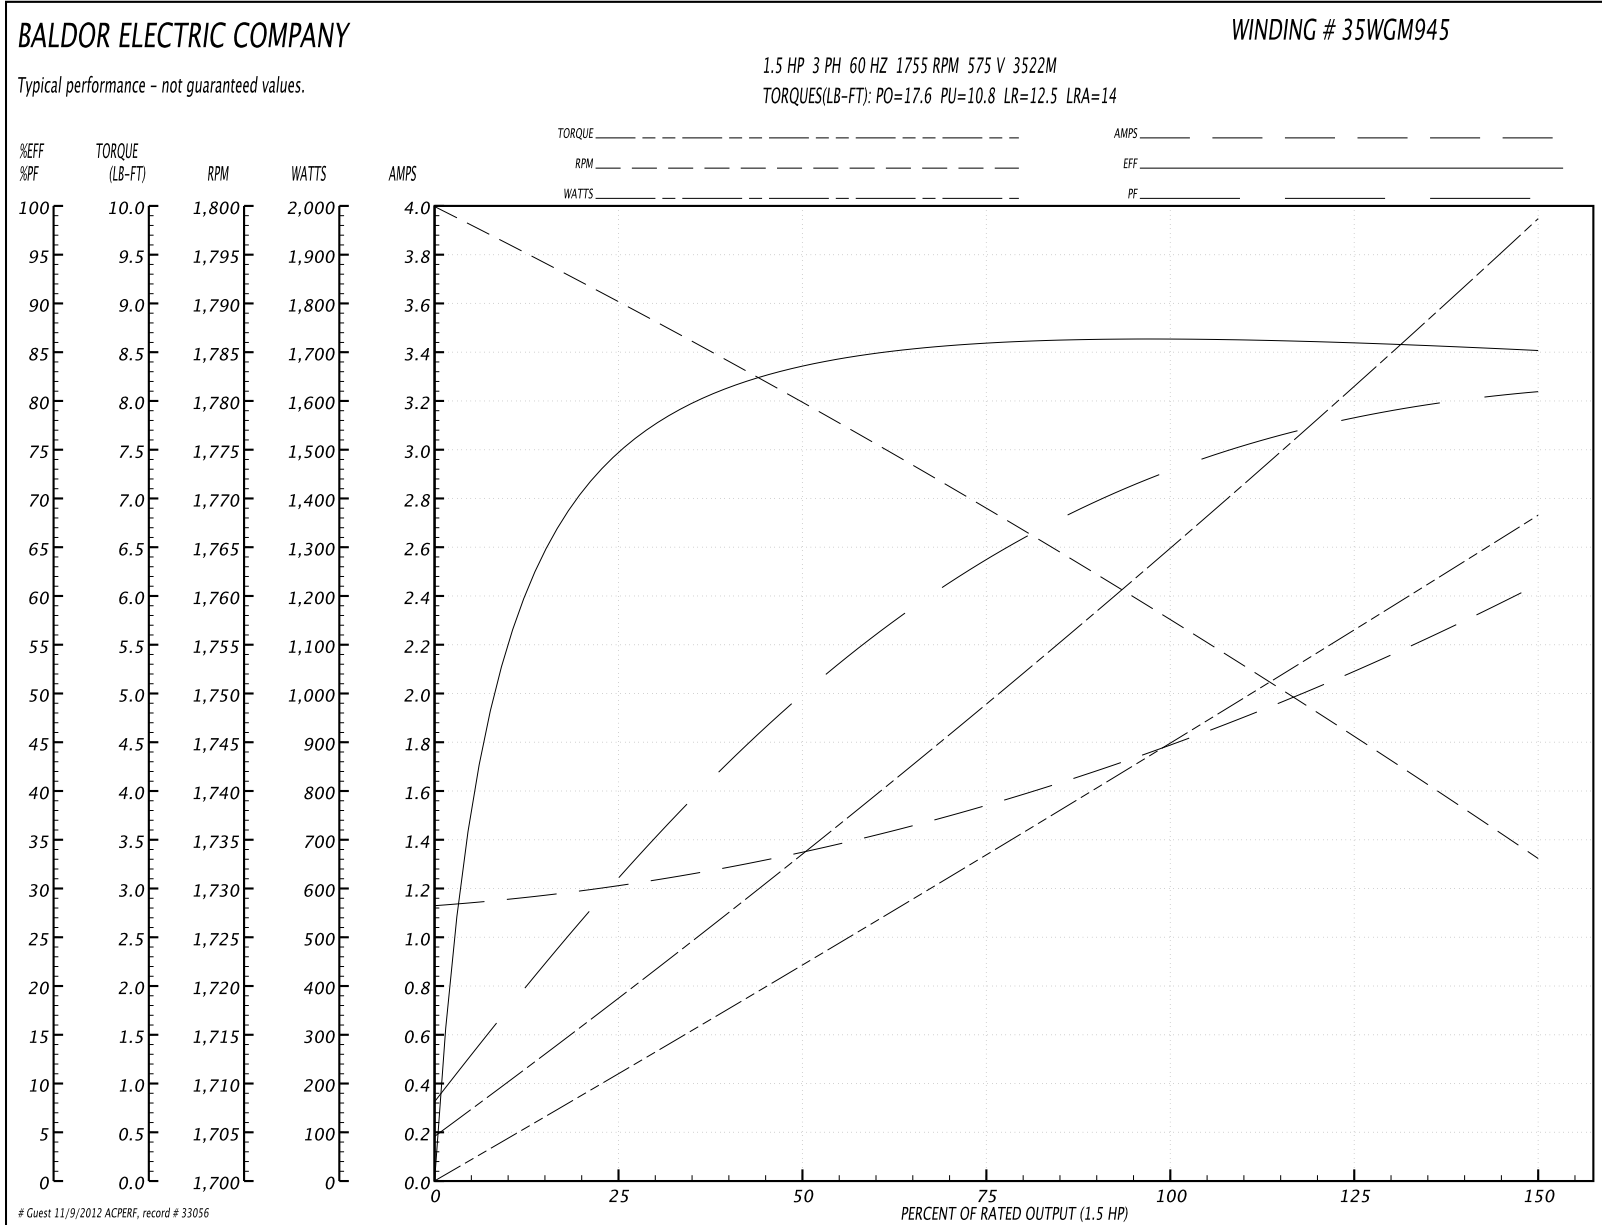

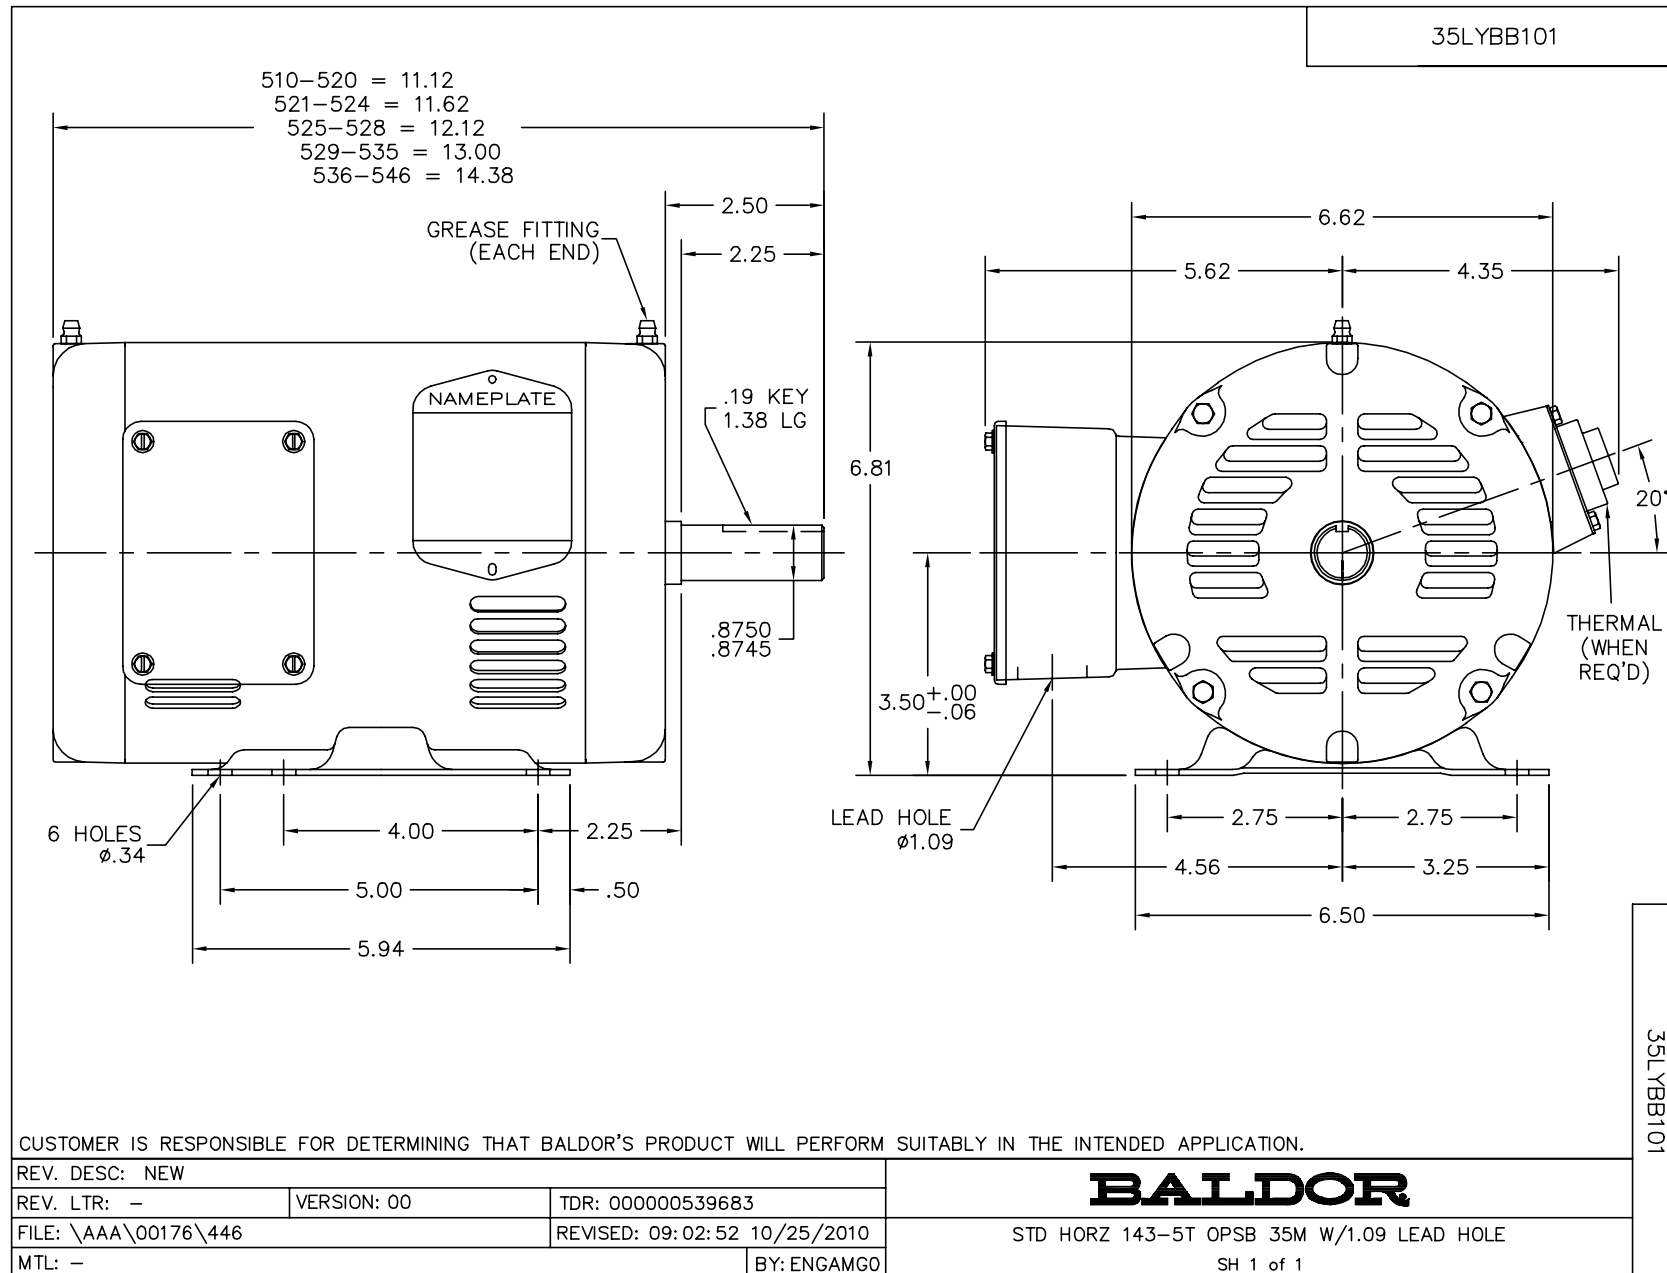

CD0006

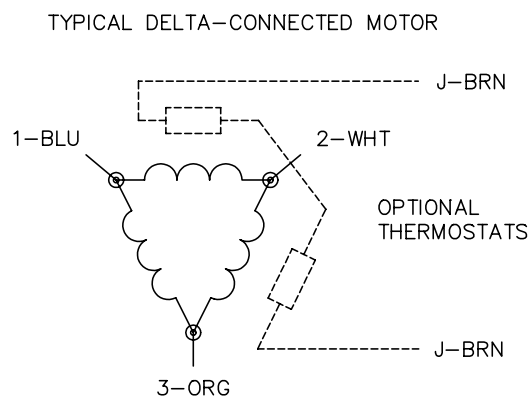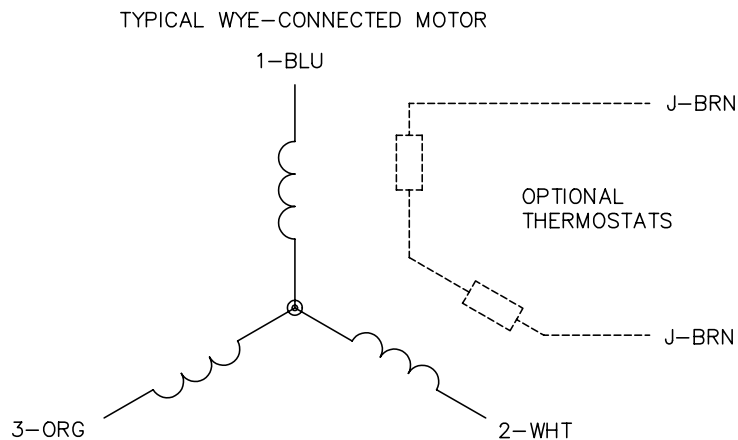

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: D

BY: JLP

REVISED: 01/21/99 4:02

TDR: 0171435

90000D

FILE: AAA00005141

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

CD0006