

BALDOR® • RELIANCE

Product Information Packet

IDM3770T-5

7.5HP,1770RPM,3PH,60HZ,213TC,0735M,TEBC

Copyright © All product information within this document is subject to Baldor Electric Company copyright © protection, unless otherwise noted.

Part Detail									
Revision:	D	Status:	PRD/A	Change #:		Proprietary:	No		
Type:	AC	Prod. Type:	0735M	Elec. Spec:	07WGX817	CD Diagram:			
Enclosure:	TEBC	Mfg Plant:		Mech. Spec:	07J138	Layout:			
Frame:	213TC	Mounting:	F1	Poles:	04	Created Date:	03-19-2009		
Base:	RG	Rotation:	R	Insulation:	H	Eff. Date:	09-21-2012		
Leads:	3#14	Literature:		Elec. Diagram:		Replaced By:			
Nameplate NP1162L									
CAT NO	IDM3770T-5								
SPEC.	07J138X817G1								
FRAME	213TC	HP	7.5	TE					
VOLTS	575								
MAG CUR	3.3	FLA	7.5						
RPM	1770	RPM MAX	4000						
HZ	60	PH	3	CLASS	H				
SER.F.	1.00	DES	A	SL HZ	1				
NEMA-NOM-EFF	91.7	WK2	0.86						
BLWR V	115	PH	1	HZ	60	A	2.6		
RATING	40C AMB-CONT								
DE BRG	6307	ODE BRG	6206						
CC		SN							

Parts List		
Part Number	Description	Quantity
SA180665	SA 07J138X817G1	1.000 EA
RA168623	RA 07J138X817G1	1.000 EA
HW3201A05	3/8-16 EYEBOLT	1.000 EA
09CB3002SP	CB W/1.38 LEAD HOLE FOR 37, 39, 307 & 30	1.000 EA
09GS1000SP	GASKET-CONDUIT BOX, 1/16 THICK LEXIDE	1.000 EA
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
HW3001B01	003SS CUP WASHER, FOR #8 SCREW	1.000 EA
37EP1100B61	FR TEBC 206 BRG W/ GRSR & THRU-SHAFT ENC	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
HW5100A06	W2420-025 WVY WSHR (WB)	1.000 EA
37EP1300A01SP	FACE MT ENDPLATE-ENCL-307 BRG-213TC-215T	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
10XN2520A30	HEX HD CAP SCREW-STD THD-.25 X 20 THD PE	4.000 EA
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 EA
XY3118A12	5/16-18 HEX NUT DIRECTIONAL SERRATION	4.000 EA
10XN2520A08	1/4-20X1/2 HEX HEAD CAP	2.000 EA
HA3218A06	MALE-FEMALE STANDOFF .25-20 .38 HEX X .5	3.000 EA
10XN2520A06	1/4 20X3/8 HX HD CAP	3.000 EA
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	3.000 EA
09CB3501SP	CONDUIT BOX LID FOR 09CB3001 & 09CB3002	1.000 EA
09GS1013SP	09 GS FOR 09CB3501 LID - LEXIDE	1.000 EA
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	2.000 EA
HA1005A22	SLINGER, OD 2.00, ID 1.14, 206 BRG, GM	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
HW2501F21	KEY, 5/16 SQ X 2.375	1.000 EA
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 EA
MJ5004A05	#242-21 LOCTITE GENERAL PURPOSE MED. STR	0.005 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
LB1115	LABEL,LIFTING DEVICE	1.000 EA
LB1009	LABEL,ROTATION DIRECTION (ON ROLLS)	1.000 EA
MJ1000A75	GREASE, POLYREX EM EXXON	0.050 LB
07FH5002A01	BLOWER ASSY. 07FH4001A03, EF5005	1.000 EA
MG1000G27	PAINT- S9282E CHARCOAL GREY	0.036 GA
HA3104A32	THRUBOLT- 5/16-18 X12.750	4.000 EA
LB1119	WARNING LABEL	1.000 EA
LB1125C01	STD (STOCK) CARTON LABEL BALDOR WITH FLA	1.000 EA
LC0006	CONNECTION LABEL	1.000 EA
LC0093	CONN LABEL, 1 PH, DUAL VOLT, FIXED ROT	1.000 EA
NP1162L	SS INV UL CSA CC	1.000 EA
37PA1039	PACKAGING GROUP	1.000 EA


Performance Data at 575V, 60Hz, 7.5HP (Typical performance - Not guaranteed values)**General Characteristics**


Full Load Torque:	22.1 LB-FT	Start Configuration:	DOL
No-Load Current:	3.3 Amps	Break-Down Torque:	68.9 LB-FT
Line-line Res. @ 25°C.:	2.32 Ohms A Ph / 0.0 Ohms B Ph	Pull-Up Torque:	33.9 LB-FT
Temp. Rise @ Rated Load:	43 C	Locked-Rotor Torque:	41.7 LB-FT
Temp. Rise @ S.F. Load:	53 C	Starting Current:	53.9 Amps

Load Characteristics




% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	43.0	65.0	76.0	81.0	83.0	84.0	0.0
Efficiency:	86.8	91.2	91.8	91.3	90.7	89.6	0.0
Speed:	1792.0	1784.0	1777.0	1769.0	1760.0	1750.0	0.0
Line Amperes:	3.71	4.71	6.0	7.54	9.27	11.1	0.0

Performance Graph at 575V, 60Hz, 7.5HP Typical performance - Not guaranteed values

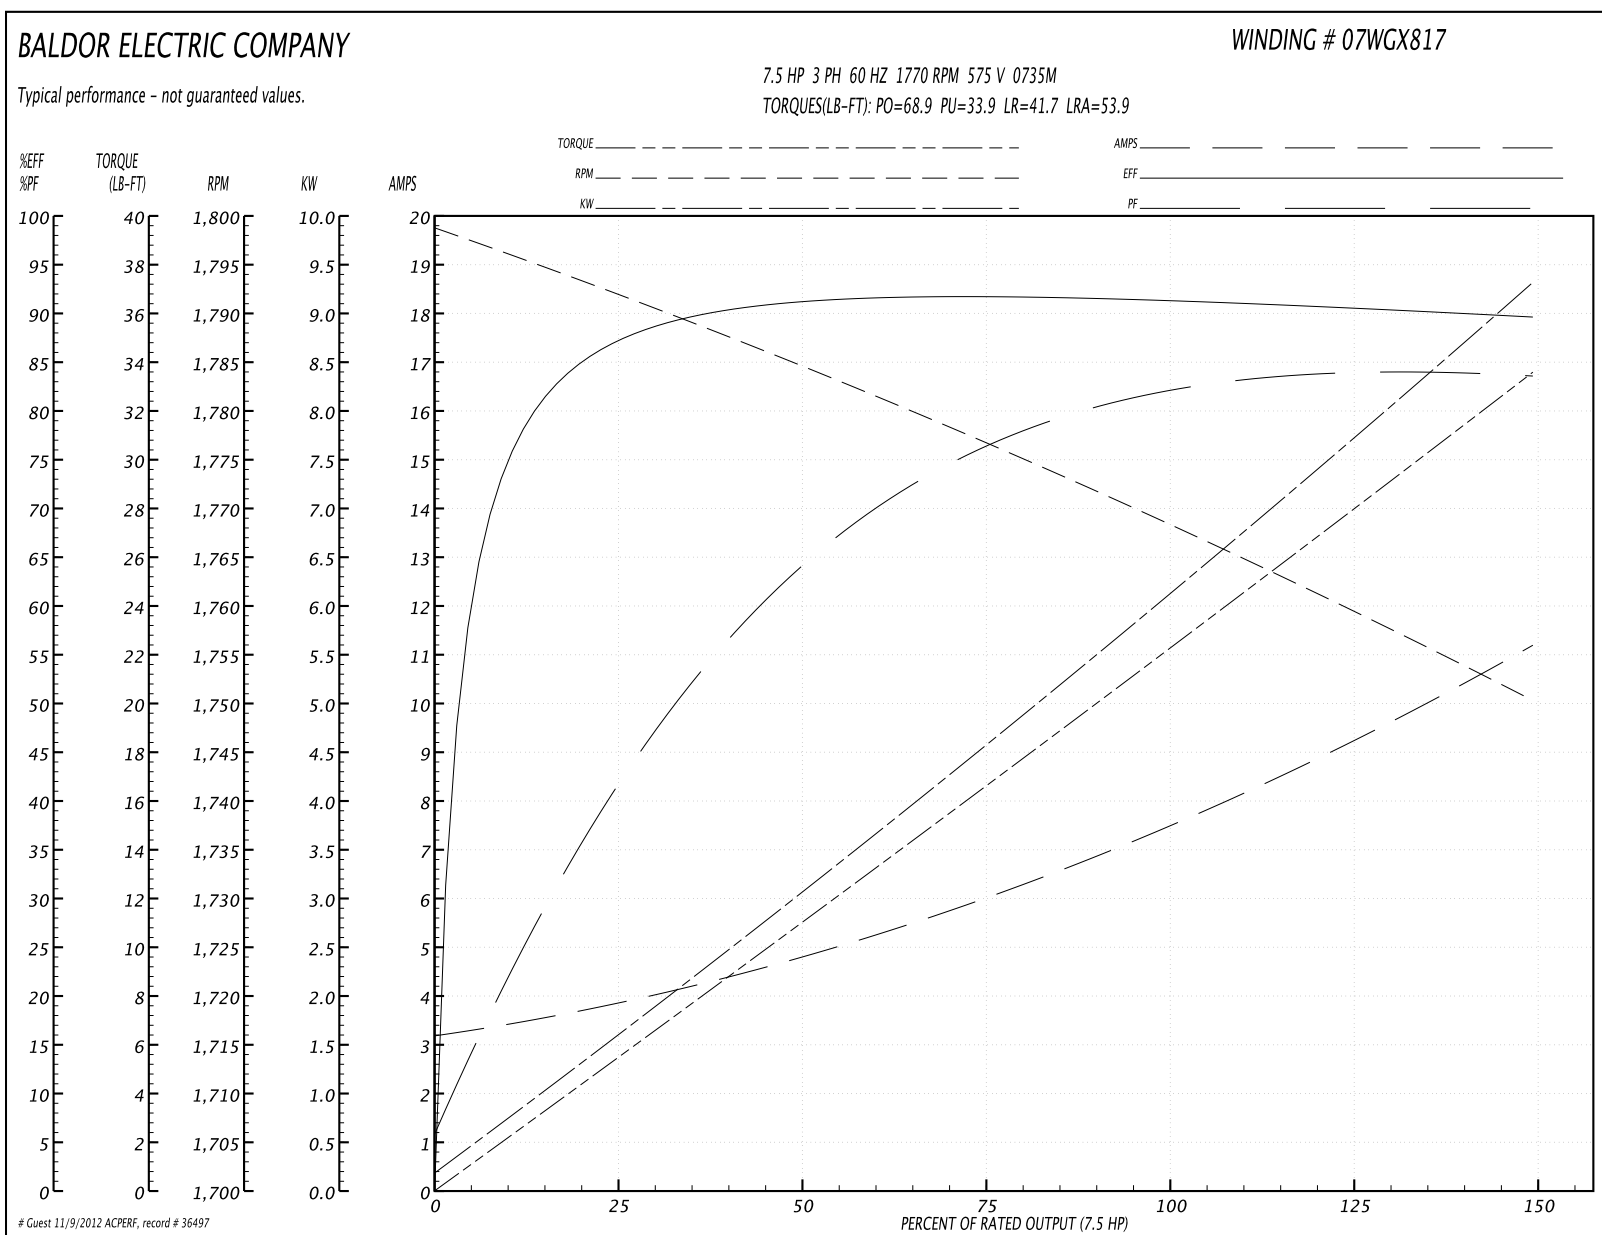

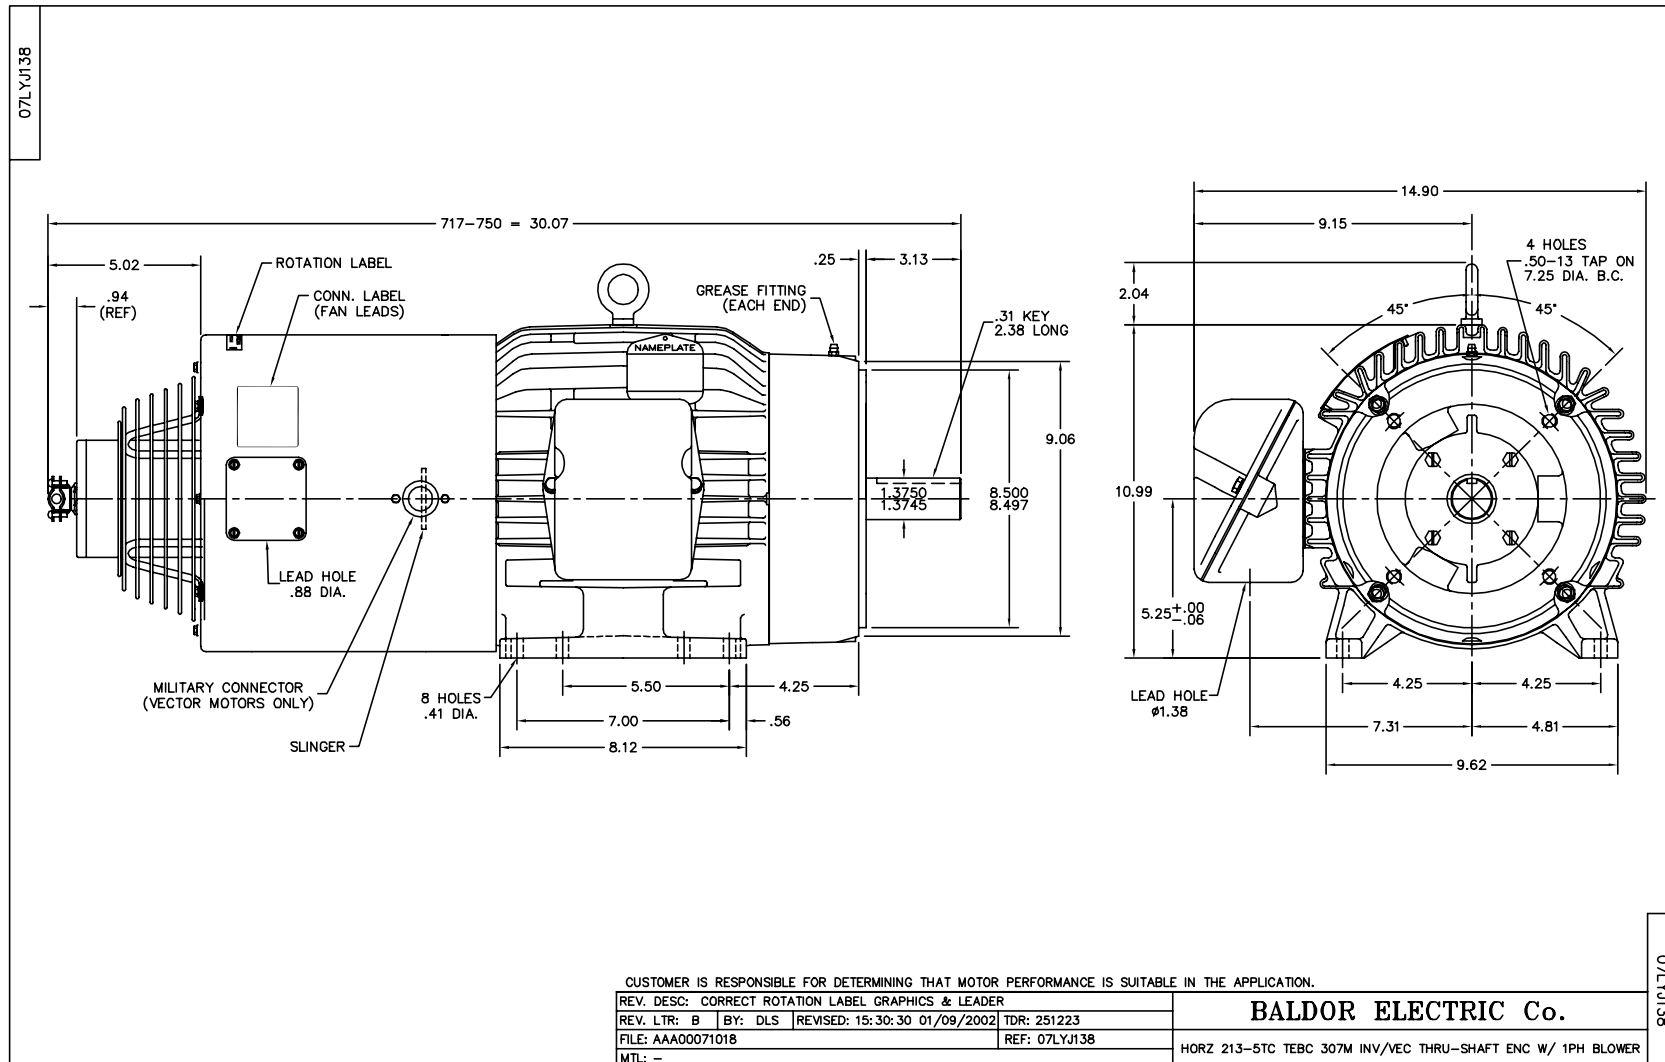

CD0006

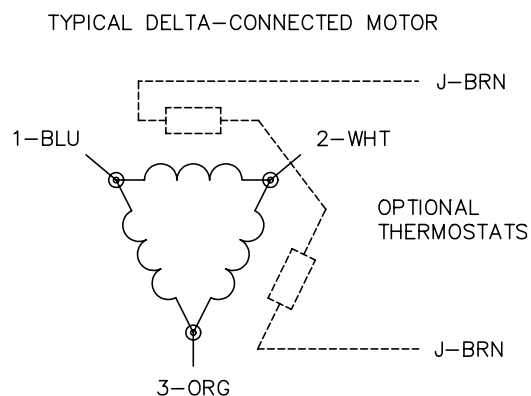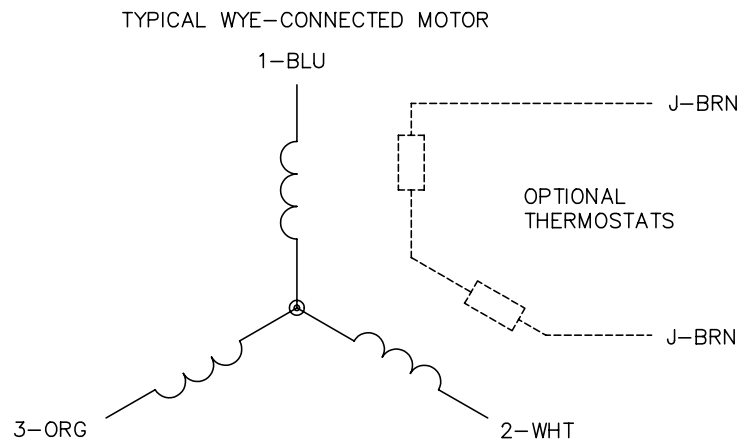

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: D

BY: JLP

REVISED: 01/21/99 4:02

TDR: 0171435

9000D

FILE: AAA00005141

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

CD0006