

BALDOR® • RELIANCE

Product Information Packet

JML3606T

3HP,3450RPM,1PH,60HZ,182JM,3634L,TEFC,F1

Copyright © All product information within this document is subject to Baldor Electric Company copyright © protection, unless otherwise noted.

Part Detail									
Revision:	R	Status:	PRD/A	Change #:		Proprietary:	No		
Type:	AC	Prod. Type:	3634L	Elec. Spec:	36WG0201	CD Diagram:			
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	36H016	Layout:			
Frame:	182JM	Mounting:	F1	Poles:	02	Created Date:			
Base:	RG	Rotation:	R	Insulation:	F	Eff. Date:	04-26-2012		
Leads:	4#14 A PH,2#16 B PH	Literature:		Elec. Diagram:		Replaced By:			
Nameplate NP1256L									
CAT.NO.	JML3606T								
SPEC.	36H16-201								
HP	3								
VOLTS	115/230								
AMP	29/14.5								
RPM	3450								
FRAME	182JM	HZ	60	PH	1				
SER.F.	1.15	CODE	G	DES	L	CLASS	F		
NEMA-NOM-EFF	76	PF	87						
RATING	40C AMB-CONT								
CC		USABLE AT 208V	15						
DE	6207	ODE	6205						
ENCL	TEFC	SN							

Parts List		
Part Number	Description	Quantity
SA036194	SA 36H16-201	1.000 EA
RA032220	RA 36H16-201	1.000 EA
36CB3004	36 CB CASTING W/1.09 DIA LEAD HOLE @ 6:0	1.000 EA
36GS1000SP	GASKET-CONDUIT BOX, .06 THICK #SV-330 LE	1.000 EA
51XB1016A08	10-16X 1/2HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
HW3001B01	003SS CUP WASHER, FOR #8 SCREW	1.000 EA
36EP3104A01	FREP MACH W/GRSR, RAISED FH PADS	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
13XF0832A08	8-32 X.50 PAN HD,SLTD, TYPE F SCREW, ZIN	2.000 EA
35CB4802A02SP	CAPACITOR COVER, STAMPED X W/AUTOPHORET	1.000 EA
35GS3001A02	GASKET, CA.COVER, 5.38 LONG .06 CS301	1.000 EA
NS2501A01	INSULATOR, CAPACITOR	1.000 EA
51XB1016A05	10-16X5/16HX WA SL SR TYB (F/S)	2.000 EA
HW5100A05	WVY WSHR F/205 & 304 BRGS	1.000 EA
36EP3405T01	PUEP ENCL 207 BRG T'SLV,GRSR,DRAIN	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
10XN2520A24	1/4-20X 1 1/2 HEX HD X	4.000 EA
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 EA
51XB1214A16	12-14X1.00 HXWSSLD SERTYB	1.000 EA
36FH4009A102SP	IEC FH GREASER W/AUTOPHERETIC PRIMER	1.000 EA
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 EA
36CB4516	36 LIPPED CB LID	1.000 EA
37GS1001SP	GASKET, CONDUIT BOX LID, .06 THICK LEXID	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HA1005A07SP	SLINGER, OD 2.25, ID 1.344, 307 BRG	1.000 EA
HW2501D13SP	KEY, 3/16 SQ X 1.375	1.000 EA
HA7000A01	KEY RETAINER 7/8" DIA SHAFT	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
WD1000A15	3-520132-2 AMP FLAG (4M/RL NON-CANC/NON-	2.000 EA
MJ1000A75	GREASE, POLYREX EM EXXON	0.050 LB
MG1000G27	PAINT- S9282E CHARCOAL GREY	0.022 GA
EC1850A06SP	ELEC CAP 115V 2.0 X 4.3 X	1.000 EA
HA3101A25	THRUBOLT 1/4-20 X 11.000 OHIO ROD	4.000 EA
35FN3002A04SP	EXFN, PLASTIC, 6.376 OD, .906 ID W/KEY	1.000 EA
SP5061A01	MODEL 36 TYPE L,F1,SMALL CAP CAN	1.000 EA
LB1125C01	STD (STOCK) CARTON LABEL BALDOR WITH FLA	1.000 EA
LC0001A01	CONN LABEL / WARNING LABEL (LC0001 / LB1	1.000 EA
NP1256L	ALUM UL CSA CC	1.000 EA
36PA1001	PACKAGING GROUP	1.000 EA


Performance Data at 230V, 60Hz, 3.0HP (Typical performance - Not guaranteed values)**General Characteristics**


Full Load Torque:	4.5 LB-FT	Start Configuration:	DOL
No-Load Current:	5.5 Amps	Break-Down Torque:	14.0 LB-FT
Line-line Res. @ 25°C.:	0.588 Ohms A Ph / 0.896 Ohms B Ph	Pull-Up Torque:	8.0 LB-FT
Temp. Rise @ Rated Load:	80 C	Locked-Rotor Torque:	10.0 LB-FT
Temp. Rise @ S.F. Load:	95 C	Starting Current:	86.0 Amps

Load Characteristics

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	70.0	83.0	88.0	91.0	92.0	92.0	92.0
Efficiency:	61.0	71.0	73.5	76.0	75.0	73.0	75.4
Speed:	3558.0	3526.0	3496.0	3457.0	3407.0	3356.0	3427.0
Line Amperes:	7.0	9.0	11.5	14.5	18.0	21.8	16.6

Performance Graph at 230V, 60Hz, 3.0HP Typical performance - Not guaranteed values

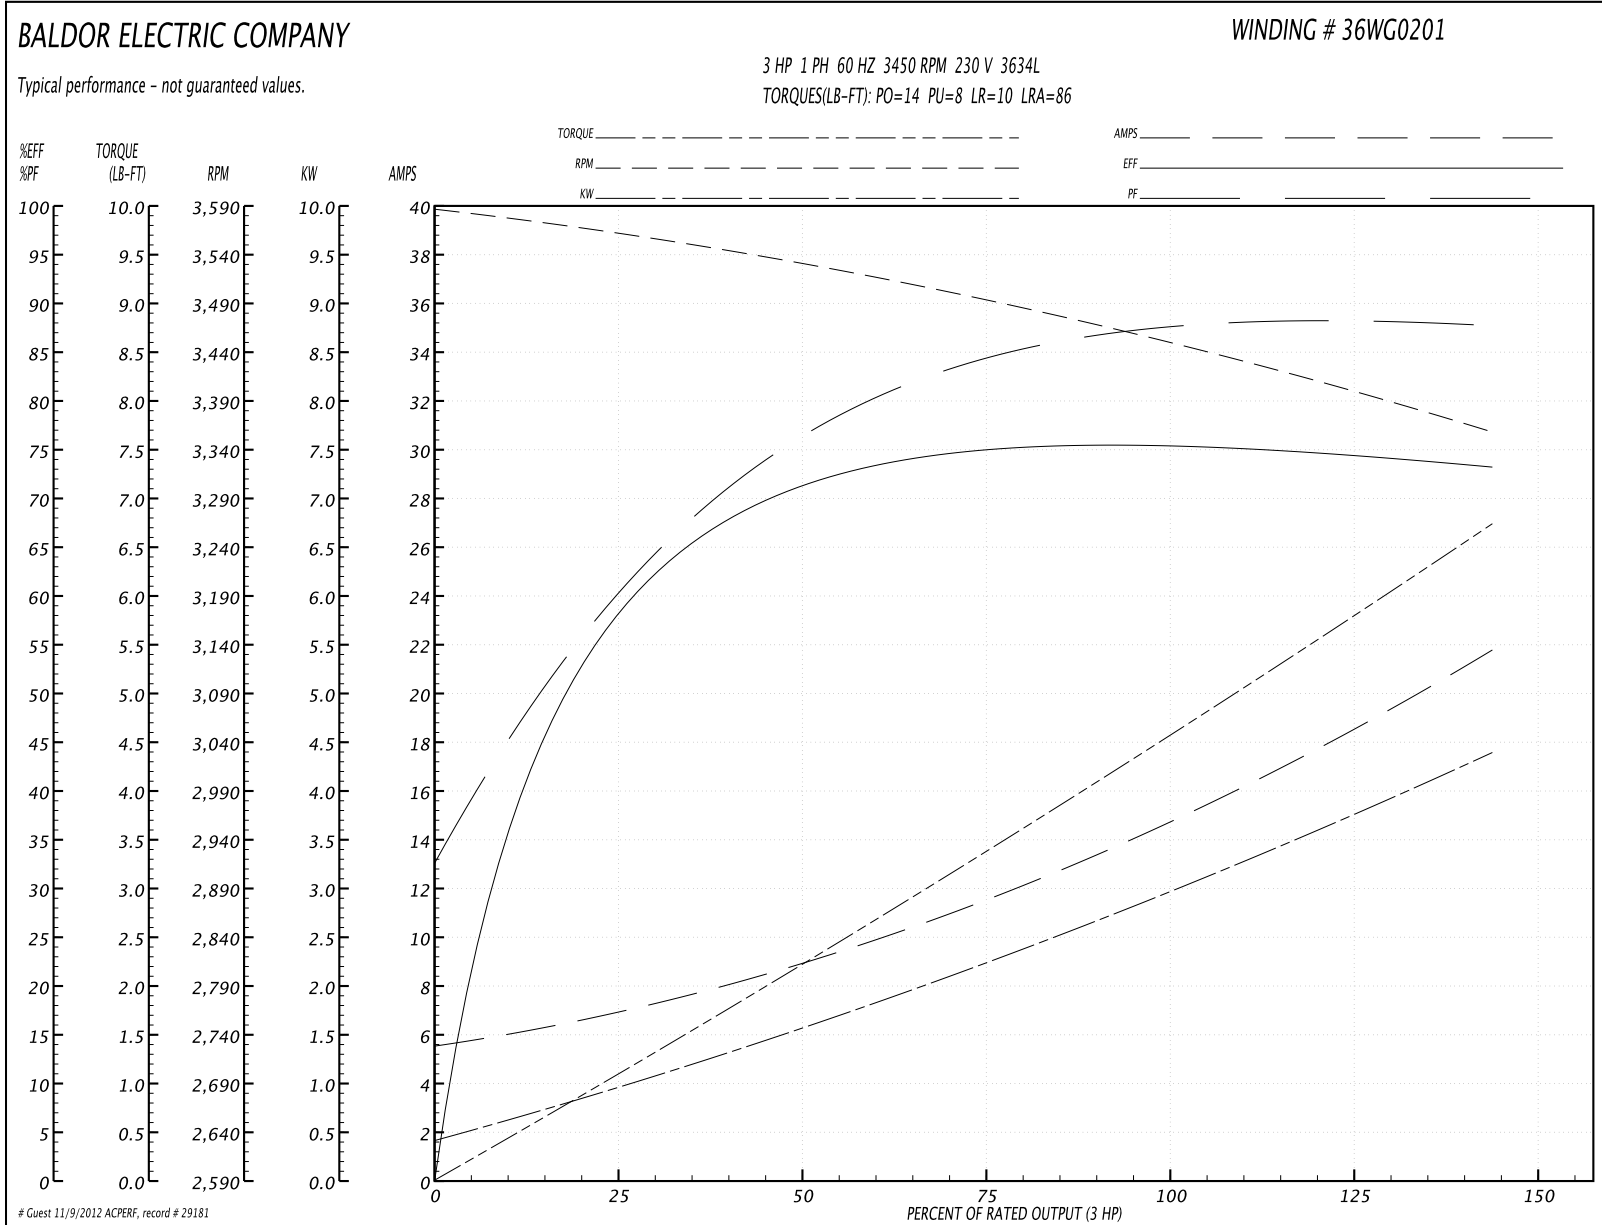

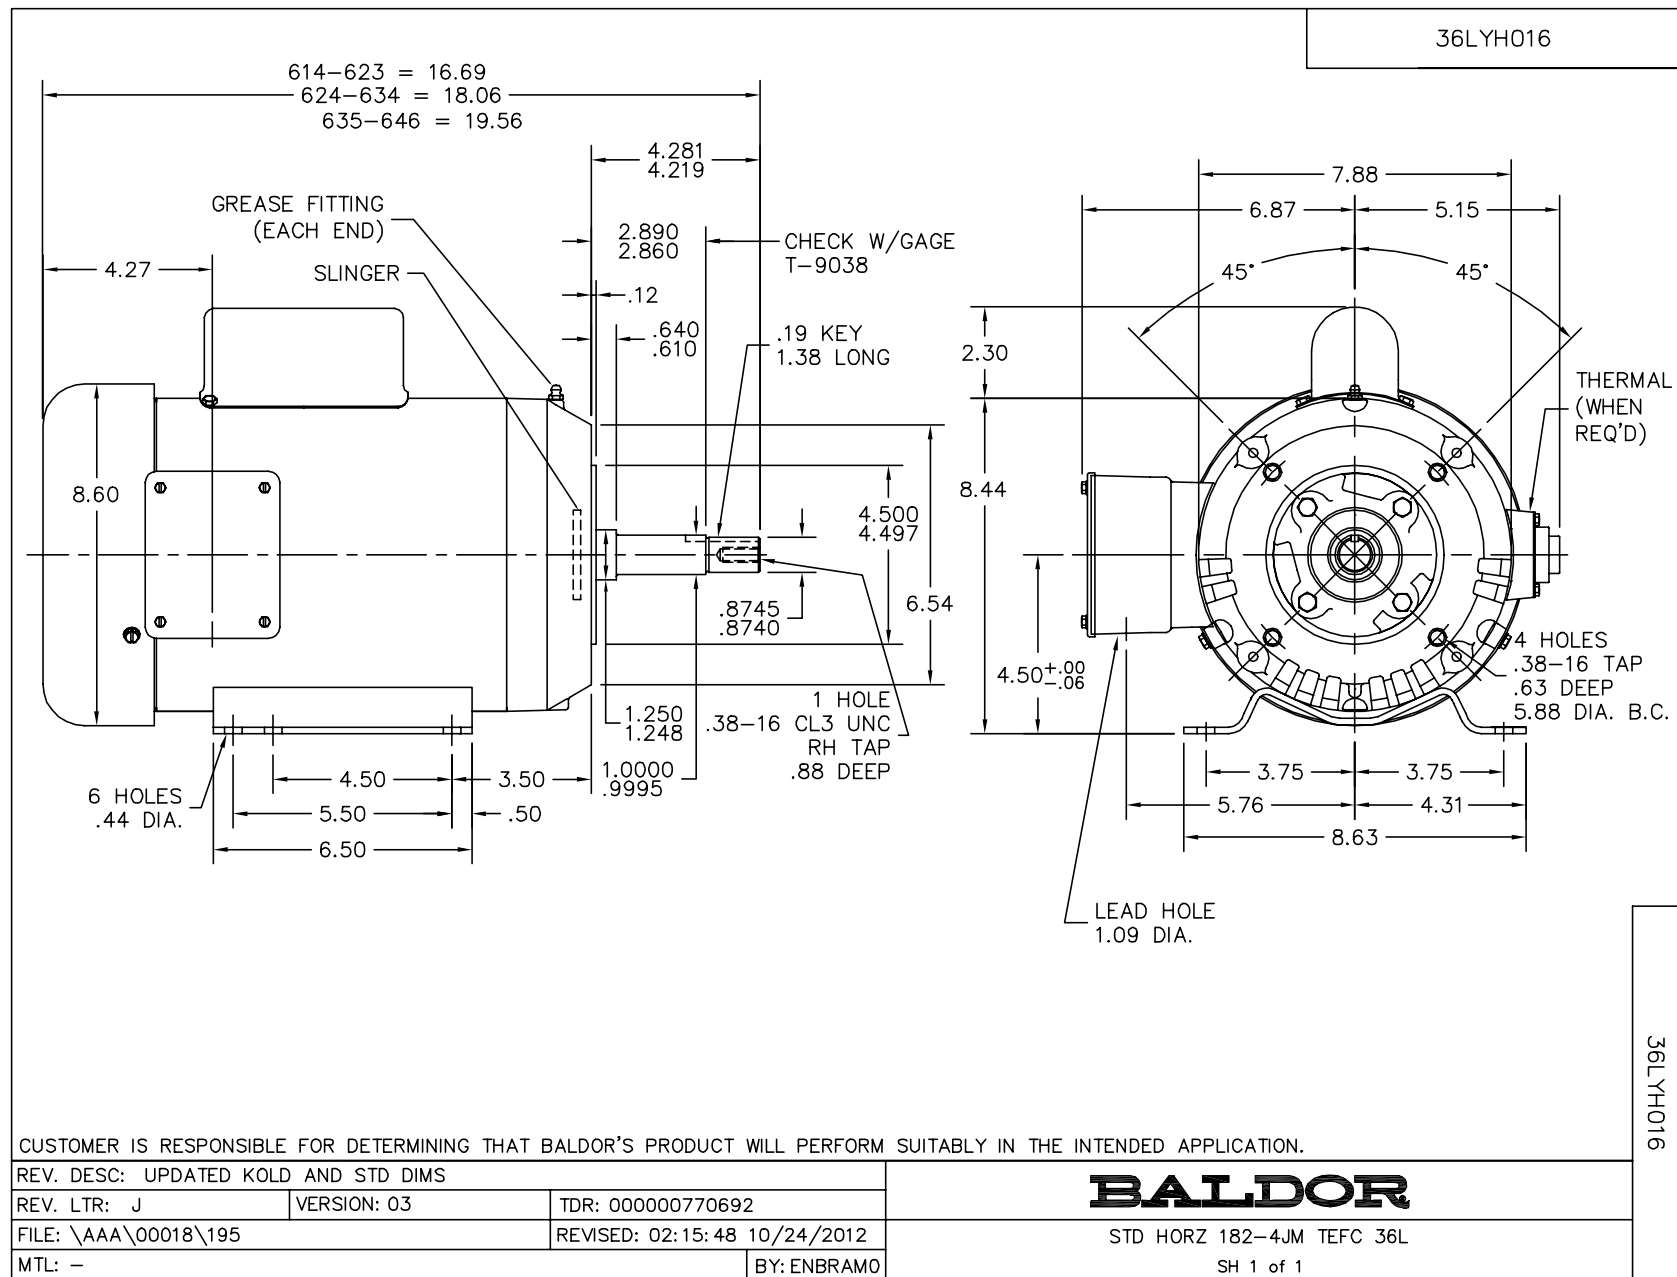

CD0001

