

# **BALDOR® • RELIANCE**

## **Product Information Packet**

### **L1206-50**

**.33HP, 1425RPM, 1PH, 50HZ, 48, 3418L, OPEN, F1**

Copyright © All product information within this document is subject to Baldor Electric Company copyright © protection, unless otherwise noted.


Part Detail									
Revision:	AB	Status:	PRD/A	Change #:		Proprietary:	No		
Type:	AC	Prod. Type:	3418L	Elec. Spec:	34WGW647	CD Diagram:			
Enclosure:	OPEN	Mfg Plant:		Mech. Spec:	34F001	Layout:			
Frame:	48	Mounting:	F1	Poles:	04	Created Date:			
Base:	RG	Rotation:	R	Insulation:	B	Eff. Date:	11-28-2011		
Leads:	6#18	Literature:		Elec. Diagram:		Replaced By:			
Nameplate NP1372L									
CAT.NO.	L1206-50								
SPEC.	34F01W647								
HP	.33								
VOLTS	110/220								
AMP	4.6/2.3								
RPM	1425 IP23								
FRAME	48	HZ	50			PH	1		
SER.F.	1.35	CODE	F			DES	N	CL	B
NEMA-NOM-EFF	62	PF	74						
RATING	40C AMB-CONT								
CC				USABLE AT 208V					
DE	6203	ODE	6203						
ENCL	OPEN	SN							
	SFA 5.6/2.8								


Parts List		
Part Number	Description	Quantity
SA007615	SA 34F01W647	1.000 EA
RA004002	RA 34F01W647	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
34CB3002A	CB CAST W/.88 DIA HOLE	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 EA
SP1006A01	TERM. BOARD, MODE 35 SW X H-23655	1.000 EA
34EP3210A01SP	FR ENDPLATE, MACH	1.000 EA
NS2500A01	INSULATOR, AUTO THER PROT	1.000 EA
WD1000A03	41531 AMP FLG.TERM,4M/REEL(2.5MIL)	1.000 EA
34CB4800SP	CAPACITOR COVER, STAMPED	1.000 EA
51XB1016A05	10-16X5/16HX WA SL SR TYB (F/S)	2.000 EA
HW5100A03SP	WAVY WASHER (W1543-017)	1.000 EA
34EP3212A02	PU ENDPLATE, MODEL 34 OPEN	1.000 EA
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 EA
34CB4517	CB LID 4 MTG HOLES .22 DIA STAMPED, FOR	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
MG1000G27	PAINT- S9282E CHARCOAL GREY	0.014 GA
10XF0440S02	04-40 X 1/8 TYPE F HEX HD STAINLESS STIC	2.000 EA
EC1189A02SP	61B2D120189NNBA ELEC CAP, 189-227MFD, 12	1.000 EA
SP5056A24	MODEL 34 TYPE L STATIONARY SWITCH WITH L	1.000 EA
HA3100A47	THRUBOLT 10-32 X 7.625	4.000 EA
LB1125C01	STD (STOCK) CARTON LABEL BALDOR WITH FLA	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
LC0001A01	CONN LABEL / WARNING LABEL (LC0001 / LB1	1.000 EA
LB5040	INSTRUCTION TAG, AC & DC	1.000 EA
NP1372L	ALUM UL CSA CE CC	1.000 EA
34PA1002	PACKING GROUP, BALDOR	1.000 EA


Performance Data at 110V, 50Hz, 0.33HP (Typical performance - Not guaranteed values)							
General Characteristics							
Full Load Torque:	1.2 LB-FT			Start Configuration:	DOL		
No-Load Current:	3.2 Amps			Break-Down Torque:	2.4 LB-FT		
Line-line Res. @ 25°C.:	2.07 Ohms A Ph / 6.36 Ohms B Ph			Pull-Up Torque:	2.3 LB-FT		
Temp. Rise @ Rated Load:	49 C			Locked-Rotor Torque:	4.1 LB-FT		
Temp. Rise @ S.F. Load:	57 C			Starting Current:	18.0 Amps		
Load Characteristics							
% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	39.0	54.0	66.0	75.0	81.0	85.0	0.0
Efficiency:	43.9	58.7	64.4	66.0	65.0	61.4	0.0
Speed:	1480.0	1464.0	1445.0	1423.0	1395.0	1355.0	0.0
Line Amperes:	3.3	3.5	4.0	4.5	5.3	6.5	5.6

Performance Graph at 110V, 50Hz, 0.33HP Typical performance - Not guaranteed values

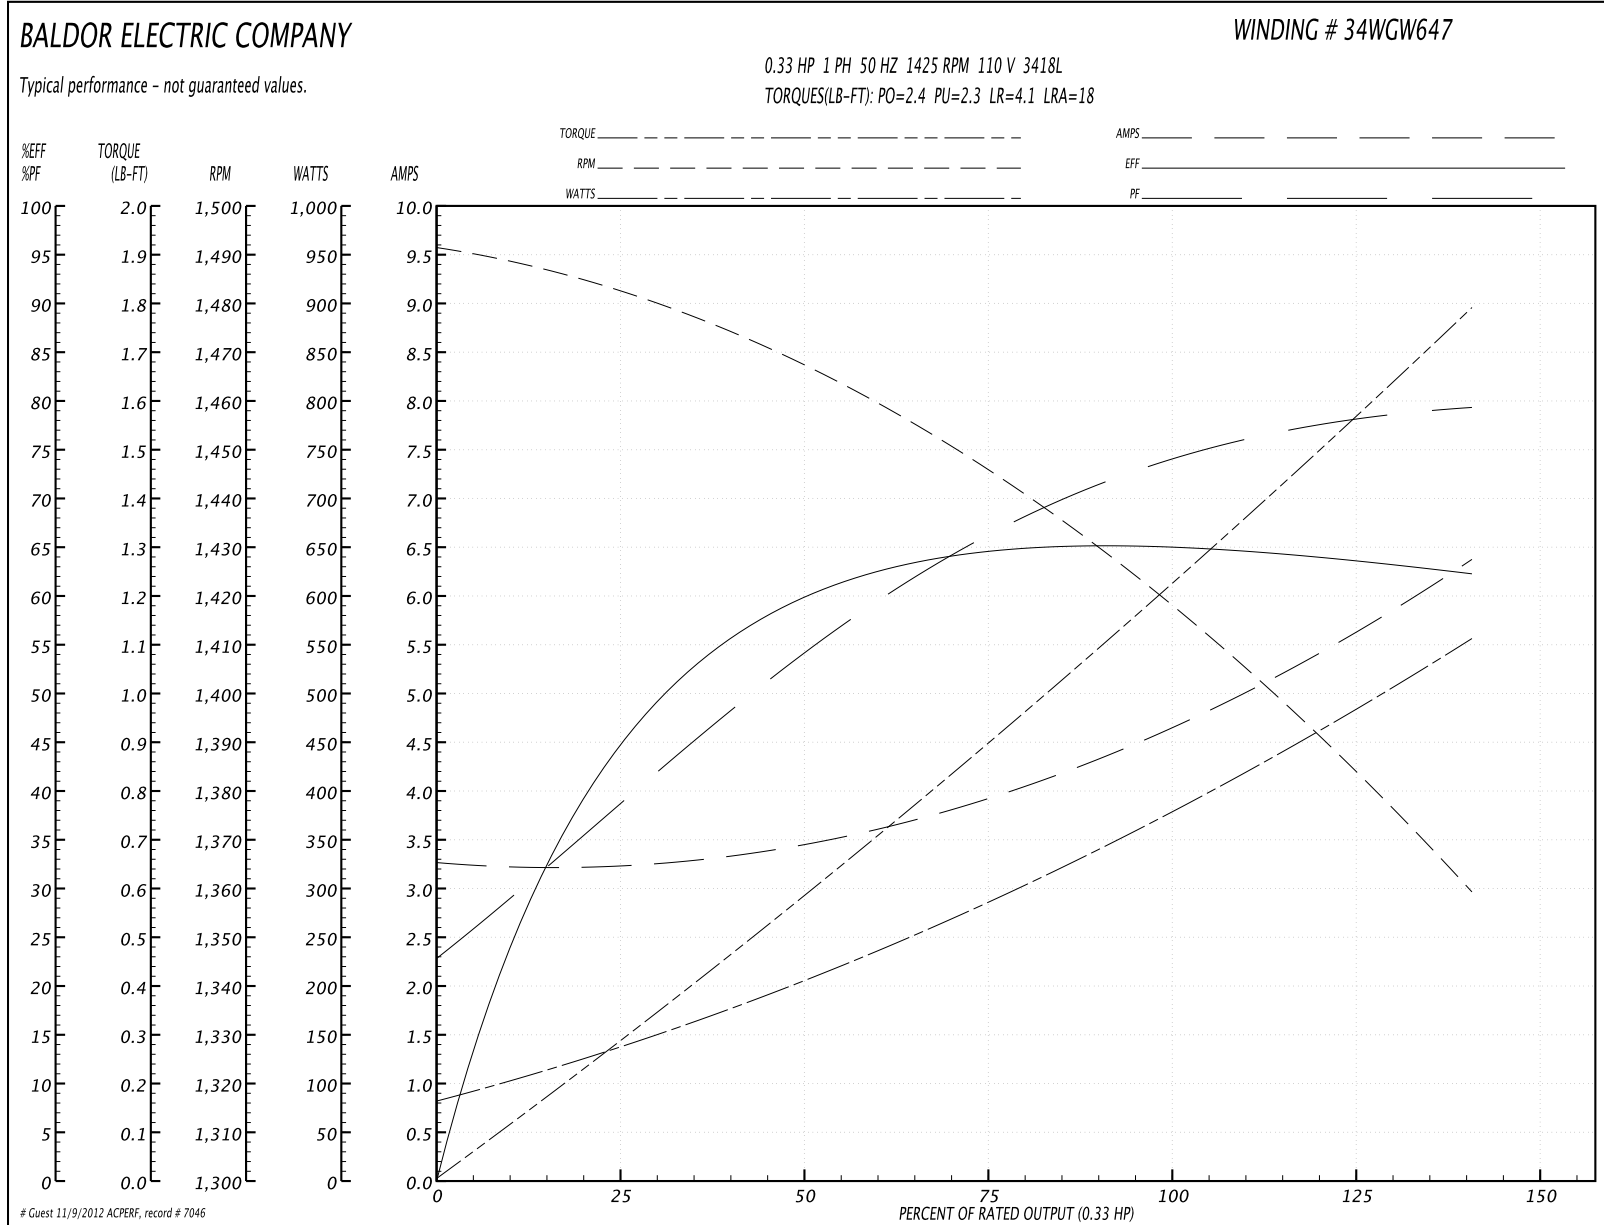

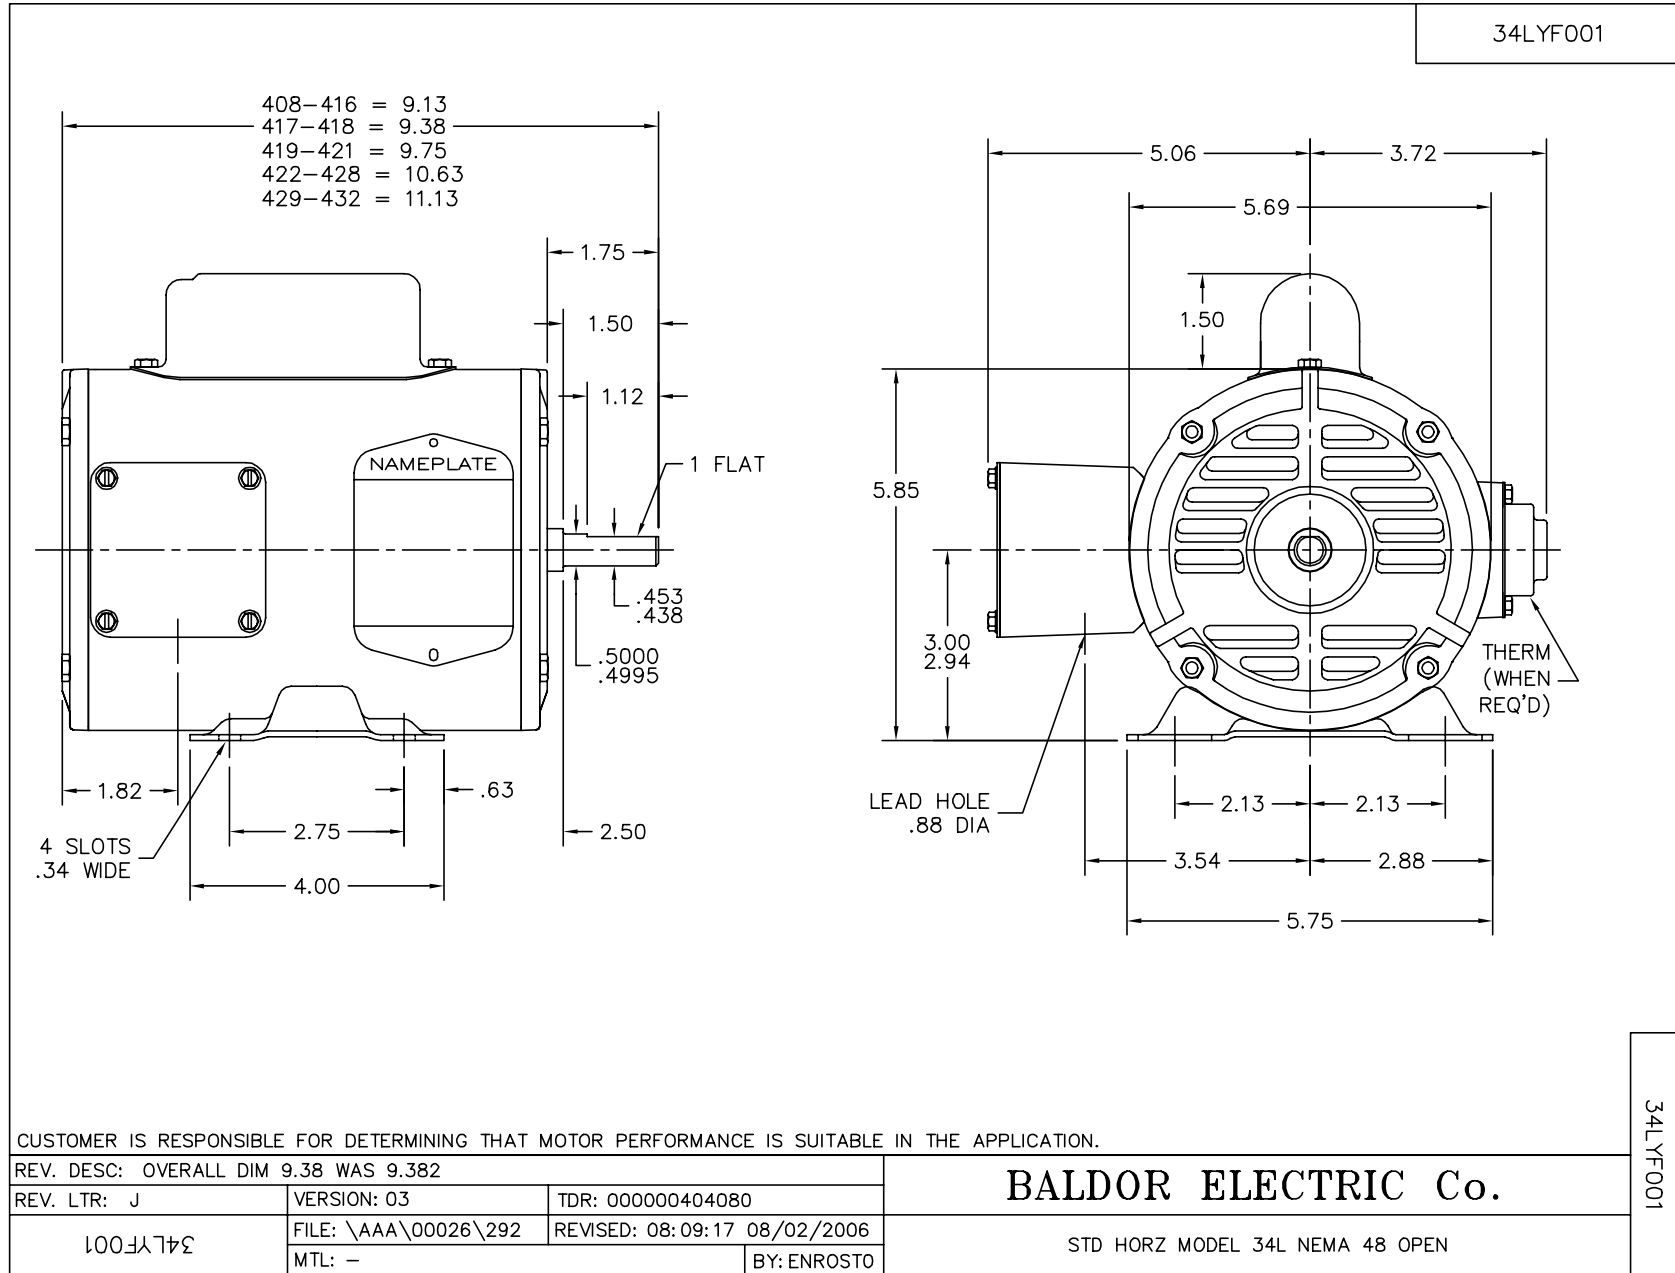

CD0001

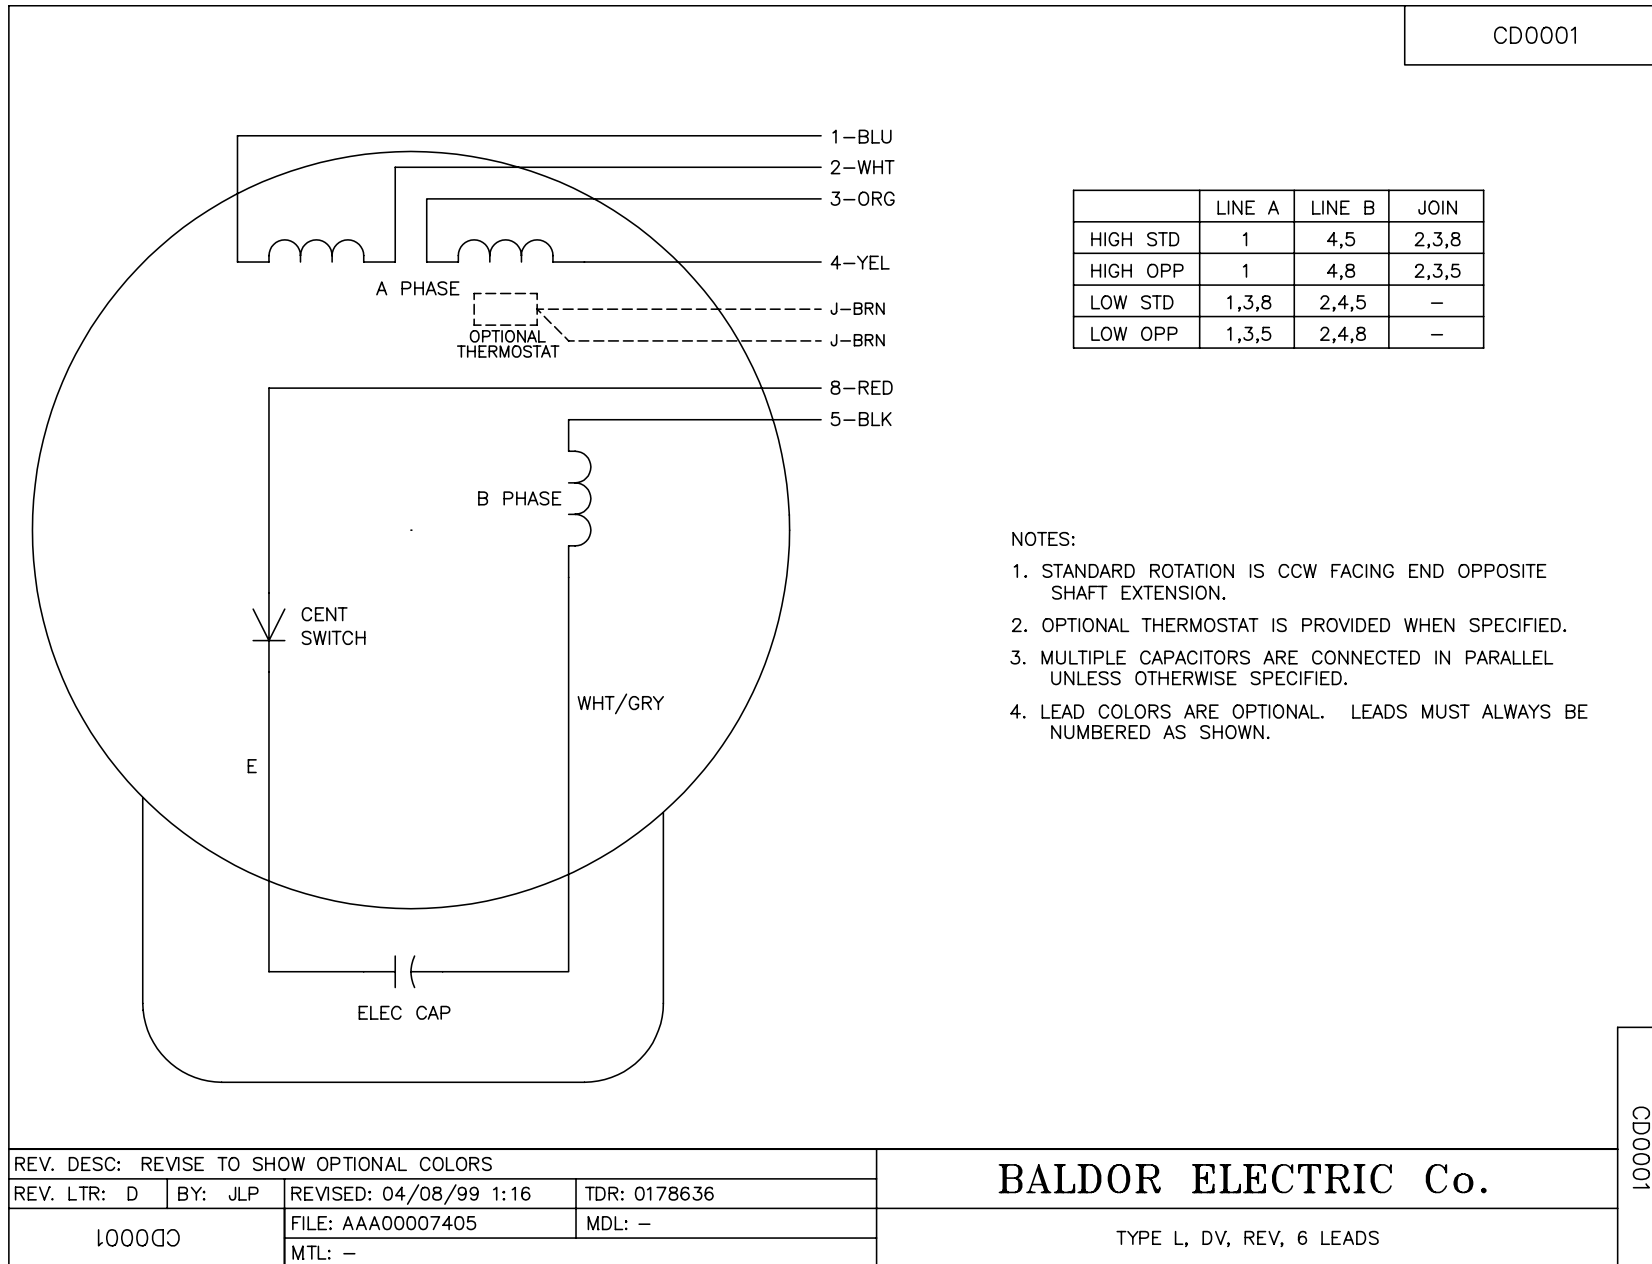

NOTES:

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: D	BY: JLP	REVISED: 04/08/99 1:16	TDR: 0178636
100000		FILE: AAA00007405	MDL: -
		MTL: -	

**BALDOR ELECTRIC Co.**

TYPE L, DV, REV, 6 LEADS

CD0001