

BALDOR® • RELIANCE

Product Information Packet

L3514M

1.5HP,1725RPM,1PH,60HZ,56/56H,3532LC

Copyright © All product information within this document is subject to Baldor Electric Company copyright © protection, unless otherwise noted.

Part Detail									
Revision:	AS	Status:	PRD/A	Change #:		Proprietary:	No		
Type:	AC	Prod. Type:	3532LC	Elec. Spec:	35WGW114	CD Diagram:			
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	35H611	Layout:			
Frame:	56/56H	Mounting:	F1	Poles:	04	Created Date:			
Base:	RG	Rotation:	R	Insulation:	B	Eff. Date:	03-15-2012		
Leads:	4#16 A&J,3#18 B PH,1#	Literature:		Elec. Diagram:		Replaced By:			
Nameplate NP1257L									
CAT.NO.	L3514M								
SPEC.	35H611W114								
HP	1.5								
VOLTS	115/208-230								
AMP	16/7.9-8								
RPM	1725								
FRAME	56/56H	HZ			60	PH	1		
SER.F.	1.00	CODE			J	DES	L	CL	B
NEMA-NOM-EFF	75.5	PF			80				
RATING	40C AMB-CONT								
CC				USABLE AT 208V					
DE	6205	ODE			6203				
ENCL	TEFC	SN							

Parts List		
Part Number	Description	Quantity
SA025416	SA 35H611W114	1.000 EA
RA021466	RA 35H611W114	1.000 EA
OC3015F12SP	CYL OIL CAP 15MFD/370V	1.000 EA
EC1645A06SP	ELEC CAP, 645-774 MFD, 125V, 2.06D X 4.	1.000 EA
TP5059	GENERIC THERMAL KIT	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
35CB3007	35 CB CASTING W/.88 DIA. LEAD HOLE	1.000 EA
36GS1000SP	GASKET-CONDUIT BOX, .06 THICK #SV-330 LE	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
35CB4801C01SP	COVER, MANUAL THERMAL PROT, PLATED	1.000 EA
RM1014A01SP	BUTYL RUB.THRM COV. (MENA)	1.000 EA
35GS3000SP	THERMAL GASKET LEXIDE X	1.000 EA
35EP3100M02	FREP TEFC 203 BRG W/O GRSR (RAISED FH MT	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 EA
35CB3801SP	CAPACITOR COVER, CAST	1.000 EA
34GS3002	GASKET, CAPACITOR BOX	1.000 EA
HA7010	CAPACITOR RETENTION CLAMP	1.000 EA
NS2501A02	INSULATOR, CAPACITOR BOX	1.000 EA
51XB1016A08	10-16X 1/2HXWSSLD SERTYB	2.000 EA
HW5100A03SP	WAVY WASHER (W1543-017)	1.000 EA
35EP3101A02SP	STD PU ENDPLATE-ENCL-205 BRG LESS GREASE	1.000 EA
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 EA
35FN3002A05SP	EXFN, PLASTIC, 6.376 OD, .638 ID	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
51XB1214A16	12-14X1.00 HXWSSLD SERTYB	1.000 EA
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 EA
35CB4521GX	CONDUIT BOX LID KIT	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HW2501D13SP	KEY, 3/16 SQ X 1.375	1.000 EA
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
MJ1000A75	GREASE, POLYREX EM EXXON	0.050 LB
35FH4005A32SP	IEC FH NO GRSR W/3 HOLES - W/AUTOPHERETI	1.000 EA
MG1000G27	PAINT- S9282E CHARCOAL GREY	0.017 GA
34GS5003	FOAM SLEEVE, ID = 2 1/16" X 3 3/8"	2.000 EA
SP5056A61	MODEL 35 LC STATIONARY SWITCH LEAD ASSY	1.000 EA
WD1000A15	3-520132-2 AMP FLAG (4M/RL NON-CANC/NON-	4.000 EA
HA3100A22	THRUBOLT 10-32 X 10.125	4.000 EA
LB1087	LABEL,MANUAL RESET (ROLL LABEL)	1.000 EA
LB1119	WARNING LABEL	1.000 EA
LB1125C01	STD (STOCK) CARTON LABEL BALDOR WITH FLA	1.000 EA
LC0016	CONNECTION LABEL	1.000 EA
NP1257L	ALUM UL CSA CC THERMAL REV MTG	1.000 EA
36PA1000	PACK GROUP W/LB5001	1.000 EA

Accessories		
Part Number	Description	Multiplier
35-8762	C FACE KIT	A8
35EP1506A01SP	D-FLANGE KIT	A8


Performance Data at 115V, 60Hz, 1.5HP (Typical performance - Not guaranteed values)**General Characteristics**


Full Load Torque:	4.5 LB-FT	Start Configuration:	DOL
No-Load Current:	10.4 Amps	Break-Down Torque:	14.5 LB-FT
Line-line Res. @ 25°C.:	0.354 Ohms A Ph / 1.12 Ohms B Ph	Pull-Up Torque:	11.5 LB-FT
Temp. Rise @ Rated Load:	76 C	Locked-Rotor Torque:	15.0 LB-FT
Temp. Rise @ S.F. Load:		Starting Current:	114.0 Amps

Load Characteristics


% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	40.0	58.0	72.0	80.0	84.0	88.0	0.0
Efficiency:	59.4	71.7	76.2	76.7	75.8	73.4	0.0
Speed:	1784.0	1773.0	1759.0	1743.0	1726.0	1706.0	0.0
Line Amperes:	10.6	11.8	13.4	15.8	18.8	22.0	0.0

Performance Graph at 115V, 60Hz, 1.5HP Typical performance - Not guaranteed values

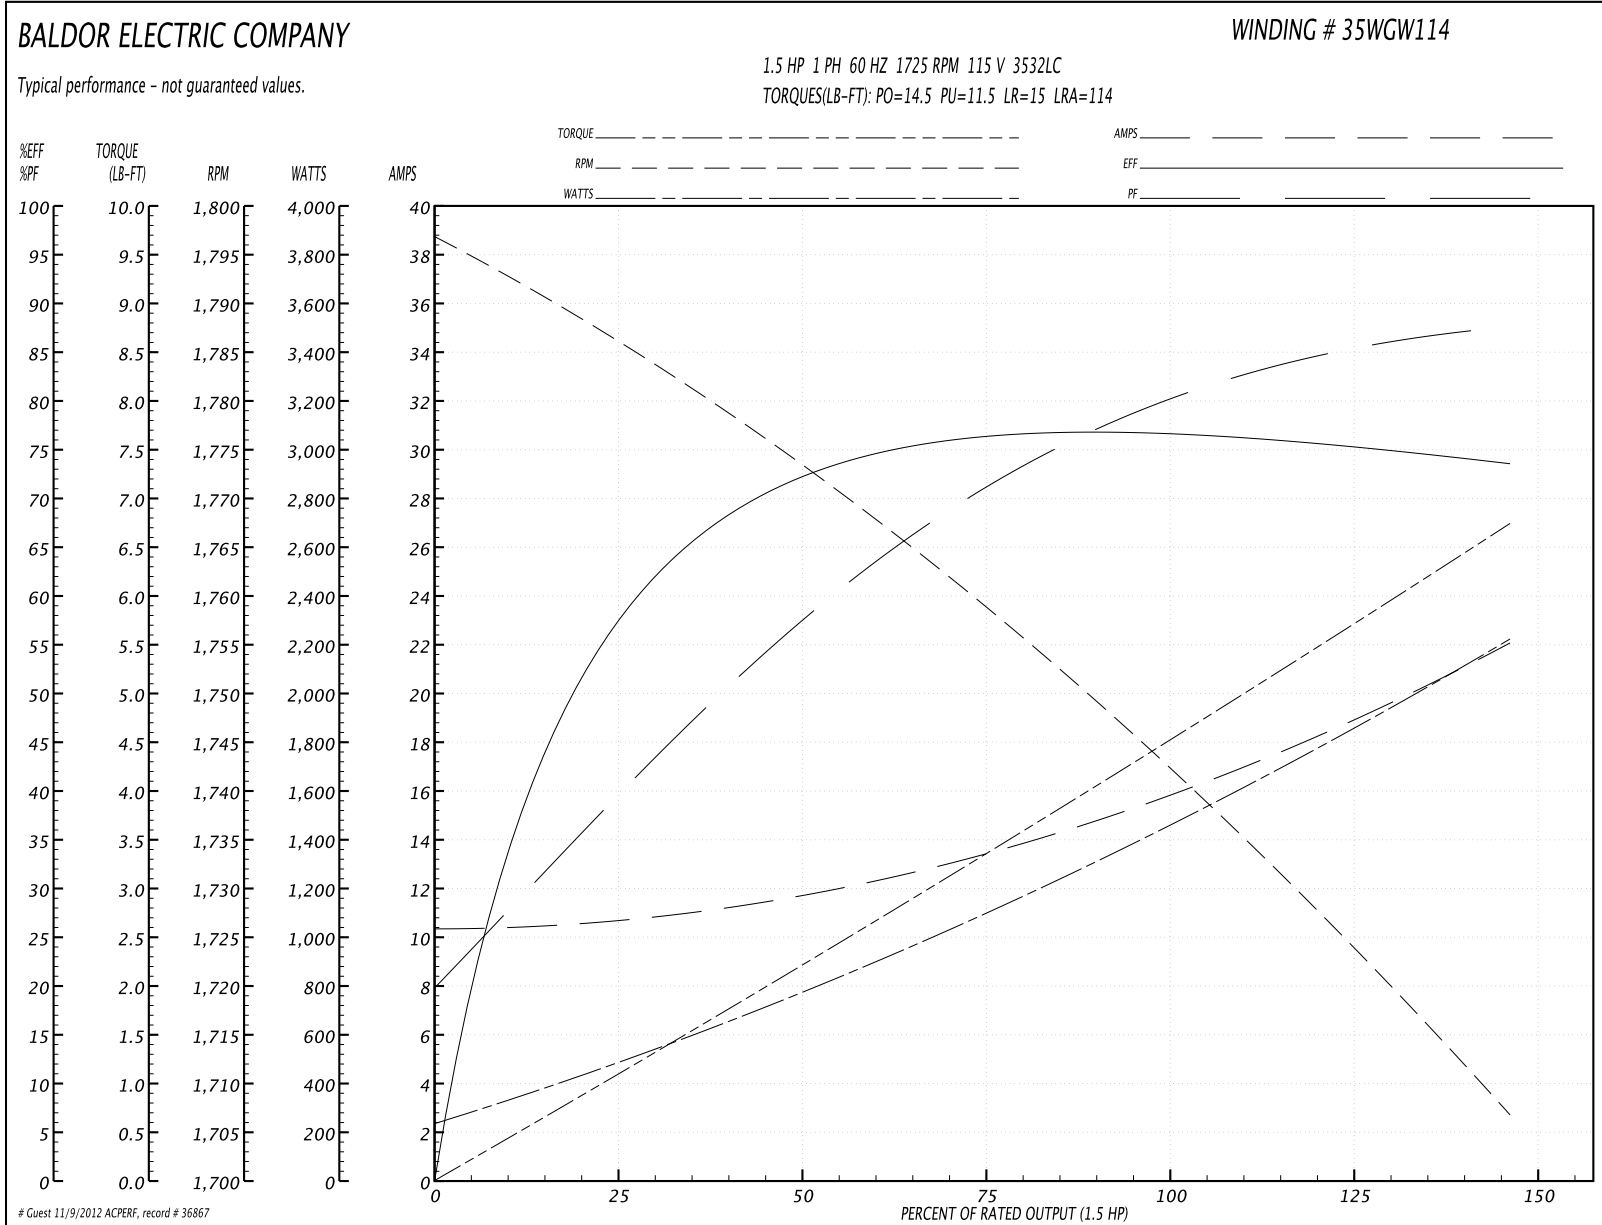

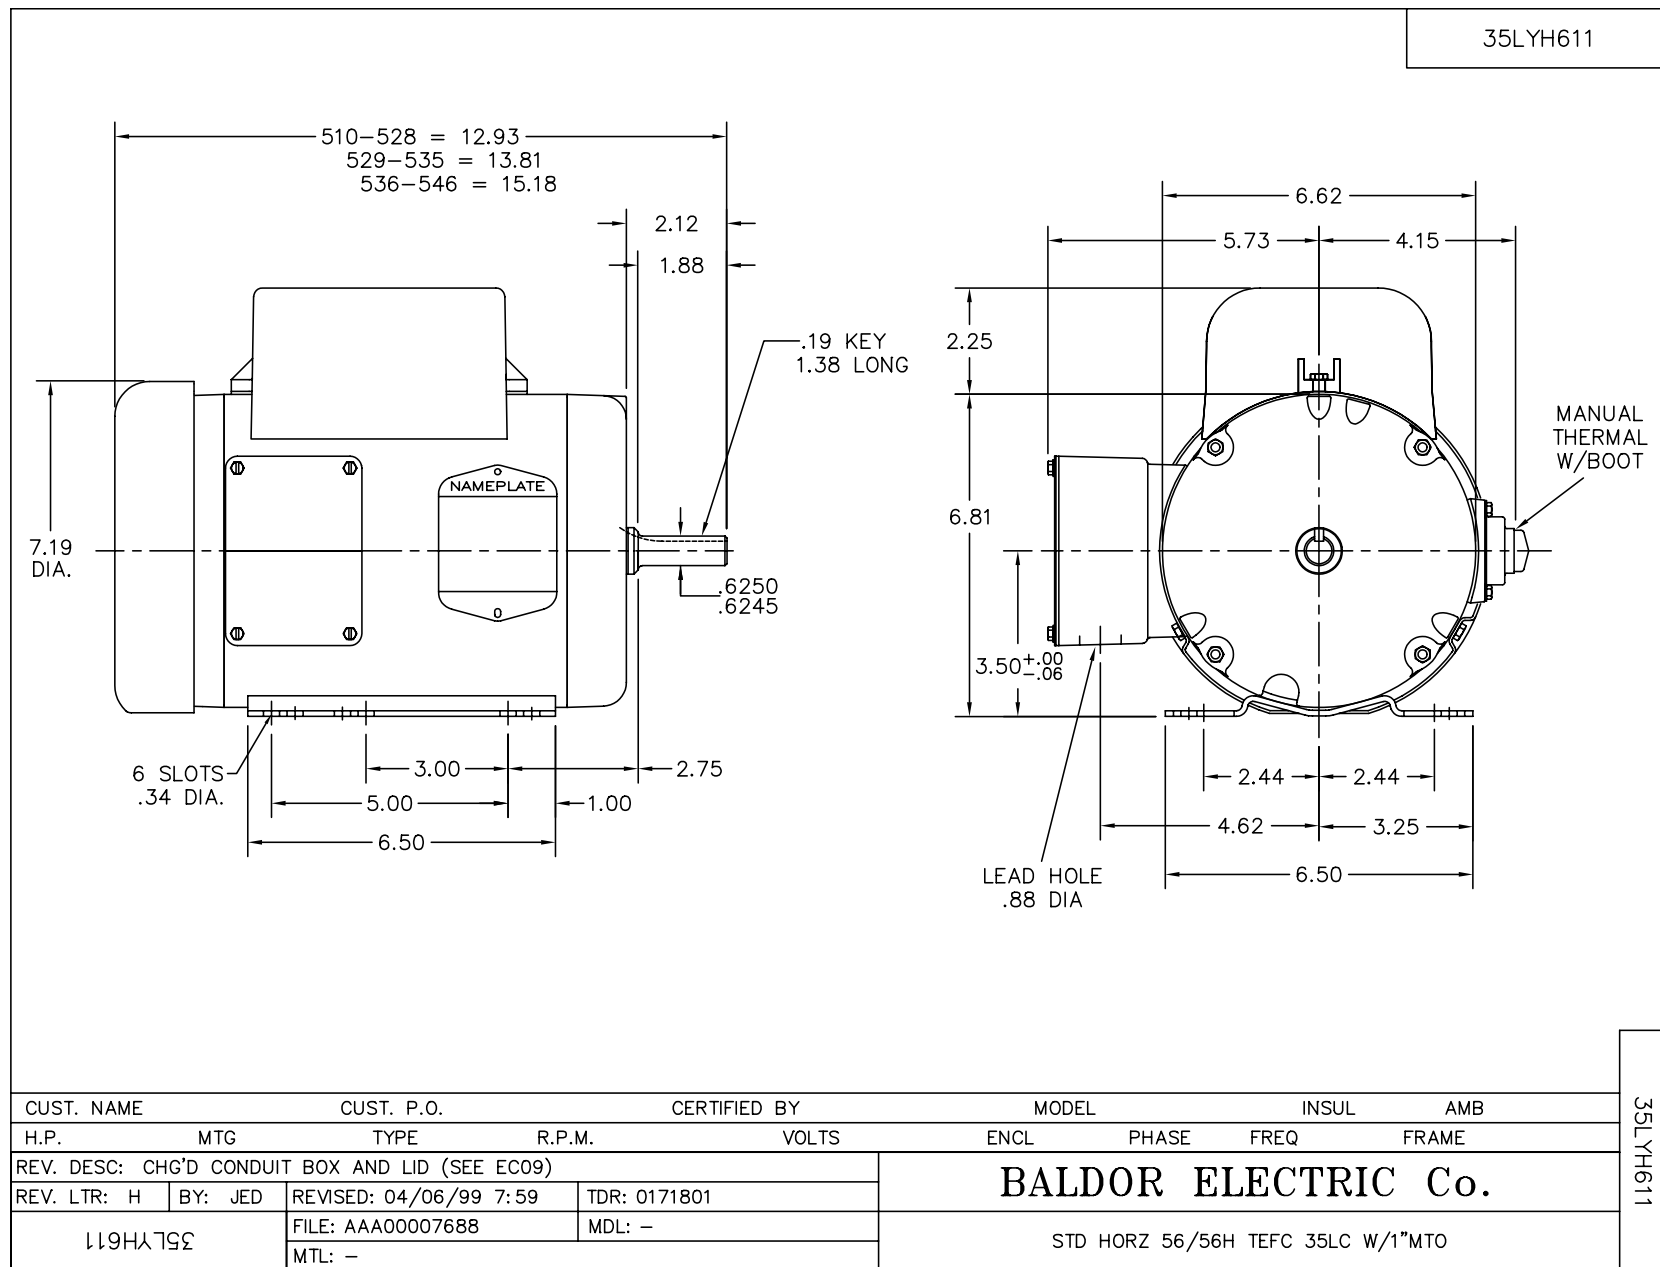

CD0016A02

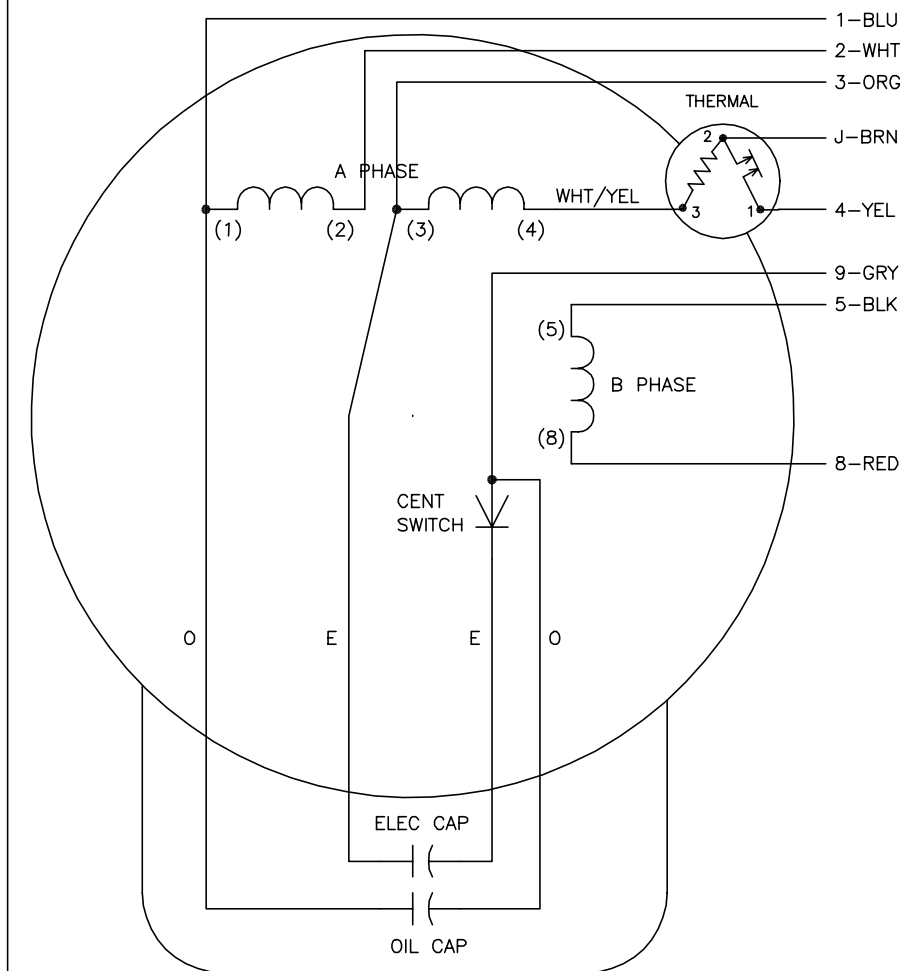

	LINE A	LINE B	JOIN	JOIN	JOIN
HIGH STD	1	4	2,3	8,9	J,5
HIGH OPP	1	4	2,3	5,9	J,8
LOW STD	1,3	4	8,9	2,J,5	—
LOW OPP	1,3	4	5,9	2,J,8	—

NOTES:

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REMOVE OPTIONAL THERMAL CONNECTION

REV. LTR: F

VERSION: 01

TDR: 000000373039

Z0V910000

FILE: \AAA\00007\411

REVISED: 10:13:25 08/11/2005

MTL: —

BY: ENJOEPO

BALDOR ELECTRIC Co.

TYPE LC, DV, REV, OIL CAP ACR. LINE, THERMAL, 8 LEADS

CD0016A02