

BALDOR® • RELIANCE

Product Information Packet

L3708T-50

5HP, 1450RPM, 1PH, 50HZ, 213T, 3732LC, TEFC, F1

Copyright © All product information within this document is subject to Baldor Electric Company copyright © protection, unless otherwise noted.

Part Detail							
Revision:	F	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3732LC	Elec. Spec:	37WGT916	CD Diagram:	
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	37K247	Layout:	
Frame:	213T	Mounting:	F1	Poles:	04	Created Date:	08-21-2006
Base:	RG	Rotation:	R	Insulation:	F	Eff. Date:	01-07-2010
Leads:	2#14 A PH,2#14 B PH	Literature:		Elec. Diagram:		Replaced By:	

Nameplate NP1256L									
CAT.NO.	L3708T-50								
SPEC.	37K247T916								
HP	5								
VOLTS	220								
AMP	22								
RPM	1450								
FRAME	213T	HZ			50	PH	1		
SER.F.	1.00	CODE			G	DES	L	CLASS	F
NEMA-NOM-EFF	84	PF			92				
RATING	40C AMB-CONT								
CC				USABLE AT 208V					
DE	6307	ODE			6206				
ENCL	TEFC	SN							

Parts List		
Part Number	Description	Quantity
SA146668	SA 37K247T916	1.000 EA
RA135738	RA 37K247T916	1.000 EA
OC3060F10SP	CYL OIL CAP 60MFD/370V	1.000 EA
EC1216C06SP	ELEC CAP, 216-259 MFD, 250V, 2.06D X 4.	2.000 EA
37FN3002A01SP	EXFN, PLASTIC, 9.00 OD, 1.155 ID	1.000 EA
HA6361A01	LIFTING LUG FOR 37, 39 & 40 FRAME (AUTOP	2.000 EA
37CB3006	37 CB CASTING W/1.38 LEAD HOLE @ 6:00	1.000 EA
37GS1000SP	GASKET, CONDUIT BOX STD., .06 THICK LEXI	1.000 EA
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
37EP3101A01SP	FR ENDPLATE,TEFC, 37 L&M, W/GREASER	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
13XT0832A07	8-32X7/16 TYP 23 PAN HD SLT DX	2.000 EA
37GS3012A01	GASKET,CAP.BOX 1/16"THICKLEXIDE SV-330 T	1.000 EA
10XN2520A10	1/4-20X 5/8 HEX HD X	2.000 EA
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	2.000 EA
HW5100A06	W2420-025 WVY WSHR (WB)	1.000 EA
37EP3100A01SP	STD PU ENDPLATE, ENCL,37 "T"-307 BRG, W/	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
XY3118A12	5/16-18 HEX NUT DIRECTIONAL SERRATION	4.000 EA
51XB1214A20	12-14X1.25 HXWSSLD SERTYB	1.000 EA
07FH4007A41	IEC FH W/GRSR, NOTCH @ 6:00 & 3 FAN CVR	1.000 EA
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 EA
37CB4516	LIPPED LID FOR 37 FRAME NEC KOBX	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
37GS1008SP	37 GS FOR CB LID - LEXIDE	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HW2501F21	KEY, 5/16 SQ X 2.375	1.000 EA
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
LB1115	LABEL,LIFTING DEVICE	1.000 EA
MJ1000A75	GREASE, POLYREX EM EXXON	0.050 LB
HA7010A01	CAPACITOR RETENTION CLAMP, 6.562 LONG	1.000 EA
WD1000A03	41531 AMP FLG.TERM,4M/REEL(2.5MIL)	6.000 EA
MG1000G27	PAINT- S9282E CHARCOAL GREY	0.028 GA
NS2539	INSULATOR FOR 37 FRAMESWITCH (MH1011A10)	1.000 EA
SP5064A02	MODEL 37 TYPE LC STATIONARY SWITCH LEAD	1.000 EA
37CB3802SP	CAPACITOR COVER, CAST	1.000 EA
HA3104A27	THRUBOLT 5/16 18 X 12.438 X	4.000 EA
NS2539	INSULATOR FOR 37 FRAMESWITCH (MH1011A10)	1.000 EA
LB1119	WARNING LABEL	1.000 EA
LB1125C01	STD (STOCK) CARTON LABEL BALDOR WITH FLA	1.000 EA
LC0017	CONN LABEL-1 PHASE-SINGLE VOLT-REV ROTNO	1.000 EA
NP1256L	ALUM UL CSA CC	1.000 EA
36PA1001	PACKAGING GROUP	1.000 EA


Accessories		
Part Number	Description	Multiplier
37-3301	C FACE KIT	P1


Performance Data at 220V, 50Hz, 5.0HP (Typical performance - Not guaranteed values)

General Characteristics			
Full Load Torque:	18.1 LB-FT	Start Configuration:	DOL
No-Load Current:	8.03 Amps	Break-Down Torque:	62.4 LB-FT
Line-line Res. @ 25°C.:	0.378 Ohms A Ph / 1.32 Ohms B Ph	Pull-Up Torque:	28.2 LB-FT
Temp. Rise @ Rated Load:	75 C	Locked-Rotor Torque:	45.2 LB-FT
Temp. Rise @ S.F. Load:		Starting Current:	138.4 Amps


Load Characteristics							
% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	66.0	82.0	89.0	92.0	93.0	93.0	0.0
Efficiency:	69.3	80.6	84.1	84.0	82.3	79.0	0.0
Speed:	1488.0	1479.0	1467.0	1454.0	1438.0	1420.0	0.0
Line Amperes:	9.35	12.8	17.0	22.1	27.9	34.8	0.0

Performance Graph at 220V, 50Hz, 5.0HP Typical performance - Not guaranteed values

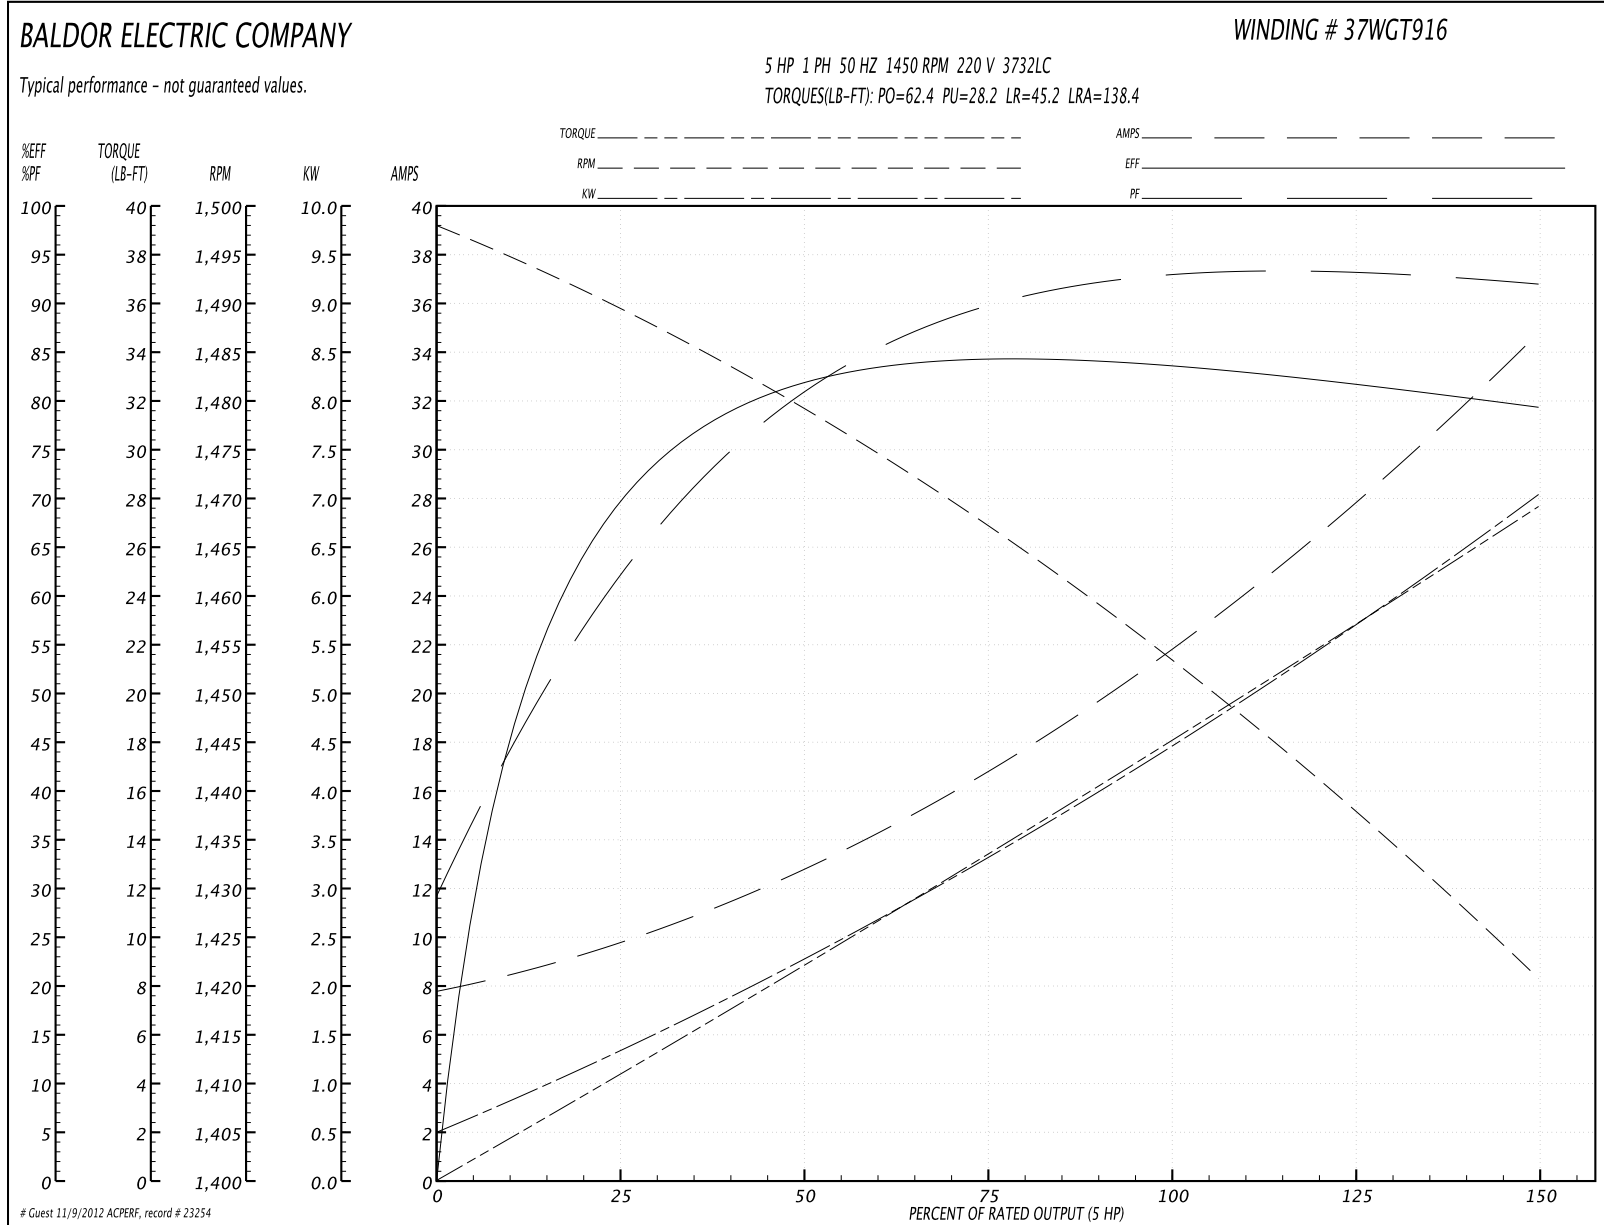

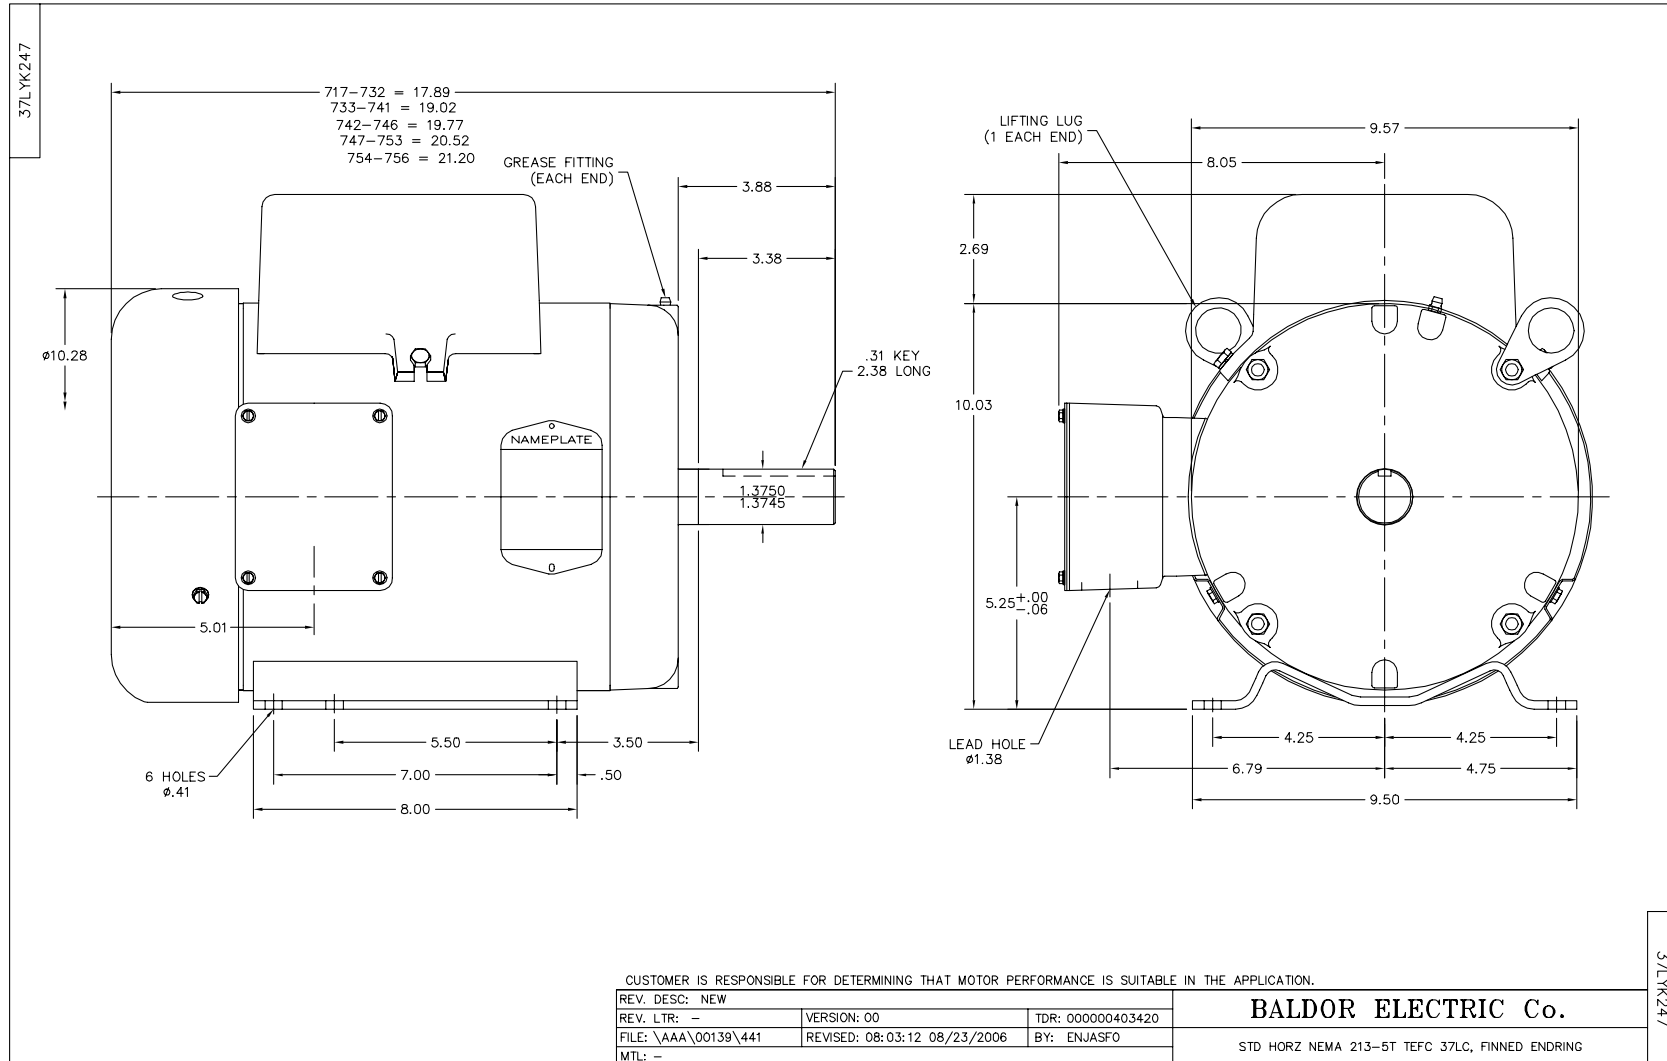

CD0017A02

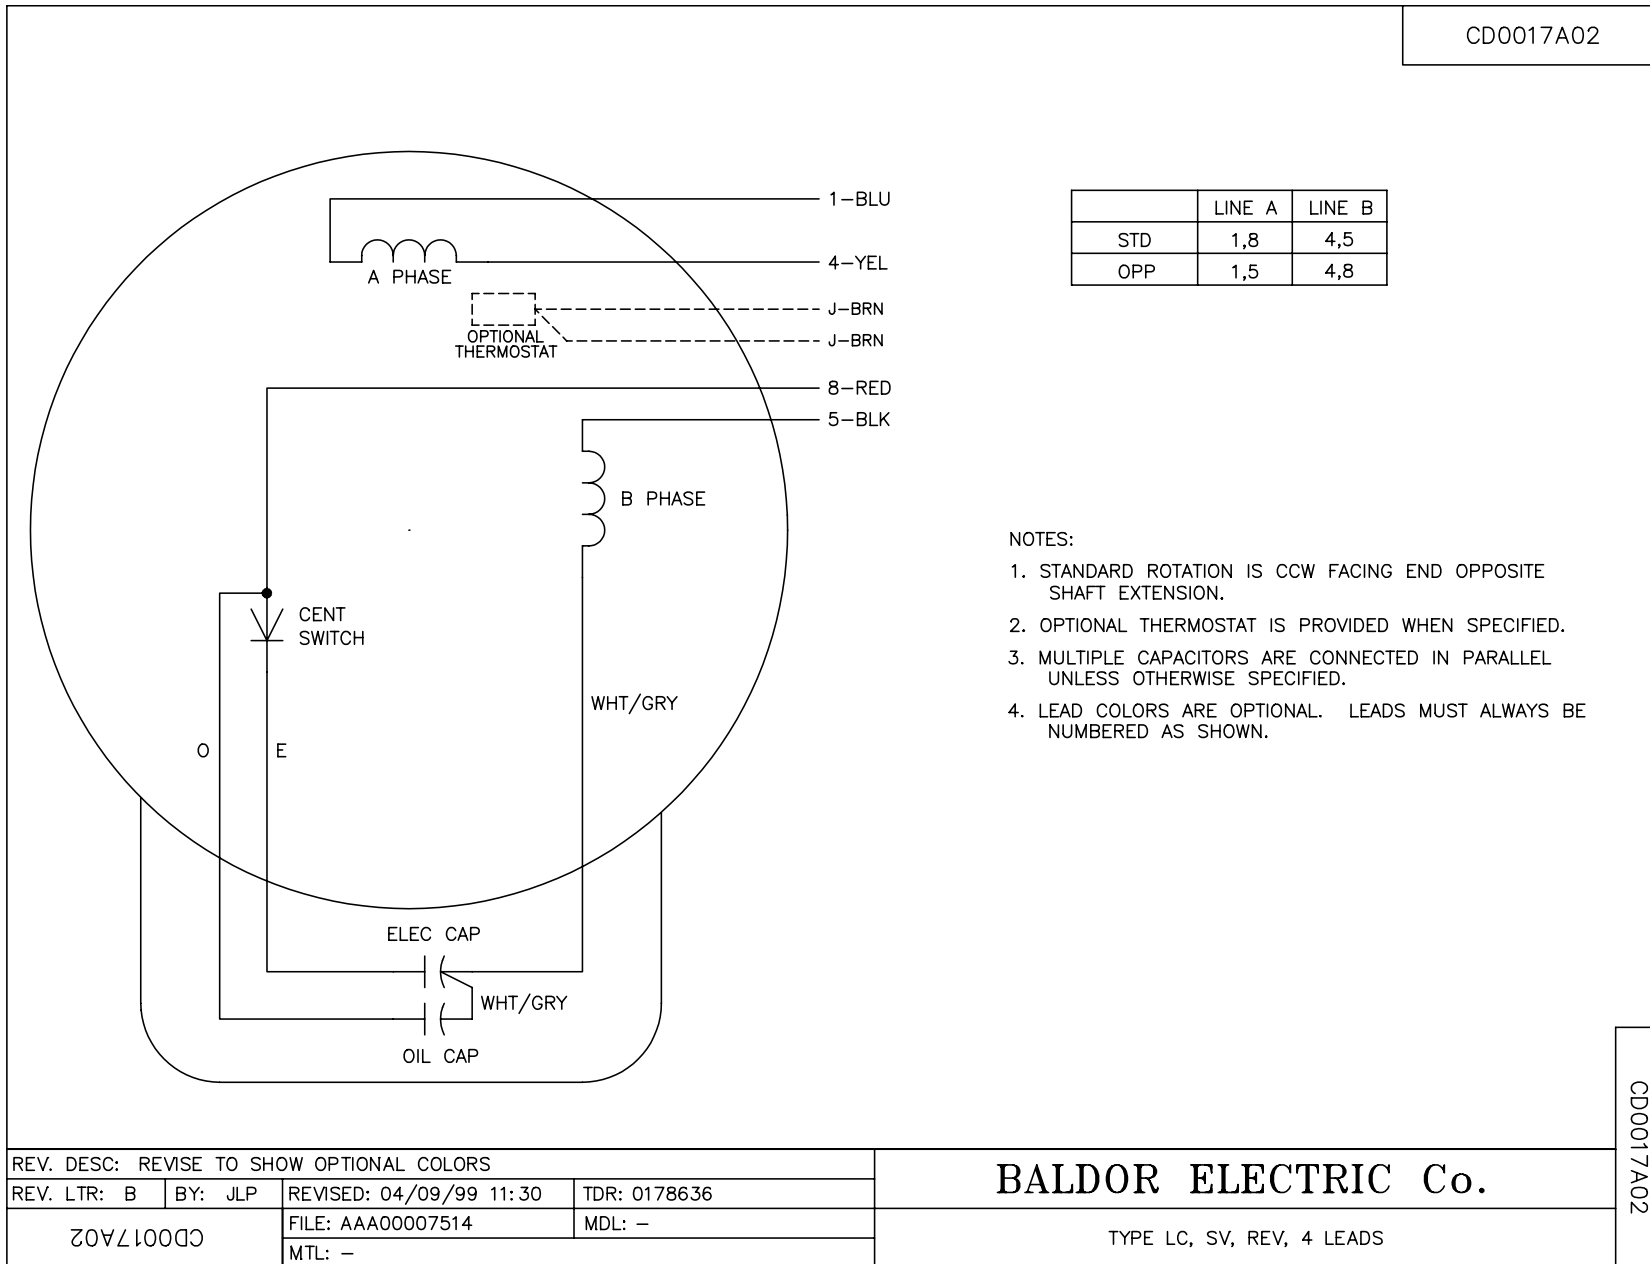

CD0017A02

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: B	BY: JLP	REVISED: 04/09/99 11:30	TDR: 0178636
CD0017A02		FILE: AAA00007514	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

TYPE LC, SV, REV, 4 LEADS