

BALDOR® • **RELIANCE**

Product Information Packet

M1220T

1/.44HP,1725/1140RPM,3PH,60HZ,145T,3528M

Copyright © All product information within this document is subject to Baldor Electric Company copyright © protection, unless otherwise noted.

Part Detail							
Revision:	B	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3528M	Elec. Spec:	35WGW198	CD Diagram:	
Enclosure:	OPEN	Mfg Plant:		Mech. Spec:	35BB001	Layout:	
Frame:	145T	Mounting:	F1	Poles:	04/06	Created Date:	12-22-2009
Base:	RG	Rotation:	R	Insulation:	B	Eff. Date:	10-27-2011
Leads:	6#18	Literature:		Elec. Diagram:		Replaced By:	

Nameplate NP1256L									
CAT.NO.	M1220T								
SPEC.	35BB001W198								
HP	1/.44								
VOLTS	460								
AMP	1.9/1								
RPM	1725/1140								
FRAME	145T	HZ	60	PH	3				
SER.F.	1.15	CODE	H	DES	B	CLASS	B		
NEMA-NOM-EFF			PF						
RATING	40C AMB-CONT								
CC			USABLE AT 208V						
DE	6205	ODE	6203						
ENCL	OPEN	SN							

Parts List		
Part Number	Description	Quantity
SA189051	SA 35BB001W198	1.000 EA
RA176770	RA 35BB001W198	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
35CB3009	35 CB CASTING W/1.09 DIA. LEAD HOLE @ 6:	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
35EP3201A01	STD FR ENDPLATE-OPEN-203 BRG W/GREASER	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
HW5100A03SP	WAVY WASHER (W1543-017)	1.000 EA
35EP3200A01	STD PU ENDPLATE-OPEN-205 BRG W/GREASER	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 EA
35CB4521	35 LIPPED CB LID (GALV & PHOSPH)	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HW2501D13SP	KEY, 3/16 SQ X 1.375	1.000 EA
HA7000A01	KEY RETAINER 7/8" DIA SHAFT	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
MJ1000A75	GREASE, POLYREX EM EXXON	0.050 LB
MG1000G27	PAINT- S9282E CHARCOAL GREY	0.017 GA
HA3100A18	THRUBOLT 10-32 X 9.250	4.000 EA
LB1119	WARNING LABEL	1.000 EA
LB1125C01	STD (STOCK) CARTON LABEL BALDOR WITH FLA	1.000 EA
LC0013	CONNECTION LABEL	1.000 EA
NP1256L	ALUM UL CSA CC	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
PA1000	PACKING GROUP 3500 SHORT	1.000 EA


Accessories		
Part Number	Description	Multiplier
35-8764	C FACE KIT	A8
35EP1604A01SP	D-FLANGE KIT	A8

Performance Data at 460V, 60Hz, 1.0HP (Typical performance - Not guaranteed values)

General Characteristics			
Full Load Torque:	3.1 LB-FT	Start Configuration:	DOL
No-Load Current:	0.92 Amps	Break-Down Torque:	9.5 LB-FT
Line-line Res. @ 25°C.:	30.2 Ohms A Ph / 0.0 Ohms B Ph	Pull-Up Torque:	6.0 LB-FT
Temp. Rise @ Rated Load:		Locked-Rotor Torque:	9.7 LB-FT
Temp. Rise @ S.F. Load:		Starting Current:	9.5 Amps

Load Characteristics							
% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	41.0	60.0	74.0	82.0	87.0	91.0	0.0
Efficiency:	59.8	72.0	75.7	76.3	75.2	72.9	0.0
Speed:	1780.0	1763.0	1743.0	1721.0	1695.0	1665.0	0.0
Line Amperes:	0.96	1.08	1.26	1.5	1.78	2.13	0.0

Performance Graph at 460V, 60Hz, 1.0HP Typical performance - Not guaranteed values

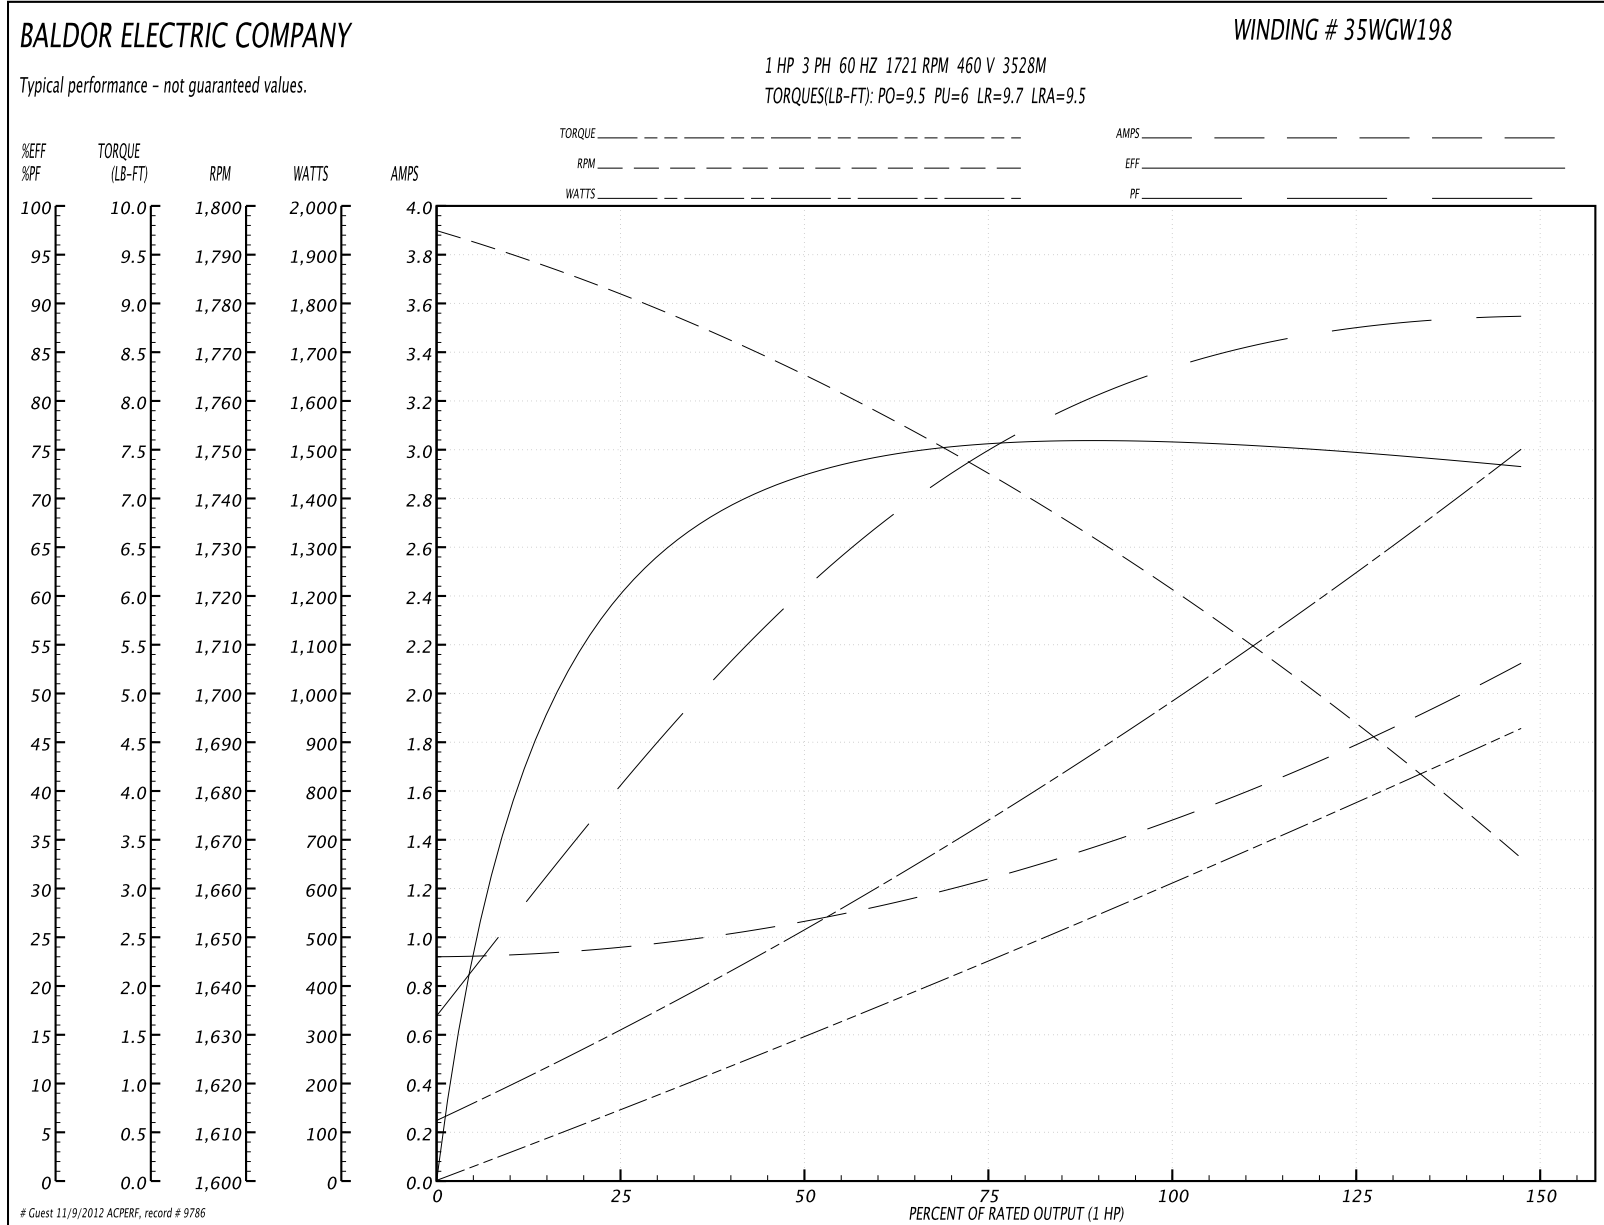

Performance Data at 460V, 60Hz, 0.44HP (Typical performance - Not guaranteed values)

General Characteristics							
Full Load Torque:	2.0 LB-FT			Start Configuration:	DOL		
No-Load Current:	0.91 Amps			Break-Down Torque:	6.5 LB-FT		
Line-line Res. @ 25°C.:	57.1 Ohms A Ph / 0.0 Ohms B Ph			Pull-Up Torque:	4.4 LB-FT		
Temp. Rise @ Rated Load:				Locked-Rotor Torque:	4.8 LB-FT		
Temp. Rise @ S.F. Load:				Starting Current:	5.0 Amps		
Load Characteristics							
% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	30.0	41.0	51.0	60.0	68.0	75.0	0.0
Efficiency:	38.3	54.3	62.2	66.3	68.3	68.7	0.0
Speed:	1190.0	1181.0	1172.0	1161.0	1150.0	1137.0	0.0
Line Amperes:	0.91	0.93	0.97	1.03	1.11	1.21	0.0

Performance Graph at 460V, 60Hz, 0.44HP Typical performance - Not guaranteed values

