

BALDOR® • RELIANCE

Product Information Packet

M1222T

2/.89HP,1725/1140RPM,3PH,60HZ,182T,3628M

Copyright © All product information within this document is subject to Baldor Electric Company copyright © protection, unless otherwise noted.

Part Detail									
Revision:	U	Status:	PRD/A	Change #:		Proprietary:	No		
Type:	AC	Prod. Type:	3628M	Elec. Spec:	36WG3120	CD Diagram:			
Enclosure:	OPEN	Mfg Plant:		Mech. Spec:	36B001	Layout:			
Frame:	182T	Mounting:	F1	Poles:	04/06	Created Date:			
Base:	RG	Rotation:	R	Insulation:	B	Eff. Date:	06-22-2009		
Leads:	6#16	Literature:		Elec. Diagram:		Replaced By:			
Nameplate NP1256L									
CAT.NO.	M1222T								
SPEC.	36B01-3120								
HP	2-.89								
VOLTS	460								
AMP	3/1.6								
RPM	1725/1140								
FRAME	182T	HZ	60	PH	3				
SER.F.	1.15	CODE	F	DES	B	CLASS	B		
NEMA-NOM-EFF		PF							
RATING	40C AMB-CONT								
CC		USABLE AT 208V	N/A						
DE	6206	ODE	6205						
ENCL	OPEN	SN							

Parts List		
Part Number	Description	Quantity
SA034195	SA 36B01-3120	1.000 EA
RA030223	RA 36B01-3120	1.000 EA
36CB3004	36 CB CASTING W/1.09 DIA LEAD HOLE @ 6:0	1.000 EA
51XB1016A08	10-16X 1/2HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
HW3001B01	003SS CUP WASHER, FOR #8 SCREW	1.000 EA
36EP3200A01SP	FR ENDPLATE, MACH	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
HW5100A05	WVY WSHR F/205 & 304 BRGS	1.000 EA
36EP3201A01	PU ENDPLATE, MACH 182-4T	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
XY2520A12	1/4-20 HEX NUT, DIRECTIONAL SERRATIONS	4.000 EA
36CB4516	36 LIPPED CB LID	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HW2501E16	3KEY, 1/4 SQ X 1.750	1.000 EA
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
MJ1000A75	GREASE, POLYREX EM EXXON	0.050 LB
MG1000G27	PAINT- S9282E CHARCOAL GREY	0.022 GA
HA3101A25	THRUBOLT 1/4-20 X 11.000 OHIO ROD	4.000 EA
LB1119	WARNING LABEL	1.000 EA
LB1125C01	STD (STOCK) CARTON LABEL BALDOR WITH FLA	1.000 EA
LC0013	CONNECTION LABEL	1.000 EA
NP1256L	ALUM UL CSA CC	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
36PA1000	PACK GROUP W/LB5001	1.000 EA

Accessories		
Part Number	Description	Multiplier
36-3403	C FACE KIT	A8
36EP1405A09SP	D-FLANGE KIT	A8


Performance Data at 460V, 60Hz, 2.0HP (Typical performance - Not guaranteed values)**General Characteristics**

Full Load Torque:	6.0 LB-FT	Start Configuration:	DOL
No-Load Current:	1.1 Amps	Break-Down Torque:	16.5 LB-FT
Line-line Res. @ 25°C.:	12.4 Ohms A Ph / 0.0 Ohms B Ph	Pull-Up Torque:	12.7 LB-FT
Temp. Rise @ Rated Load:	62 C	Locked-Rotor Torque:	14.7 LB-FT
Temp. Rise @ S.F. Load:	81 C	Starting Current:	16.7 Amps

Load Characteristics

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	63.0	80.0	85.0	89.0	90.0	92.0	90.0
Efficiency:	69.7	77.5	78.4	78.1	77.0	73.7	77.4
Speed:	1775.0	1750.0	1736.0	1710.0	1691.0	1647.0	1699.0
Line Amperes:	1.3	1.8	2.1	2.7	3.1	3.9	2.9

Performance Graph at 460V, 60Hz, 2.0HP Typical performance - Not guaranteed values

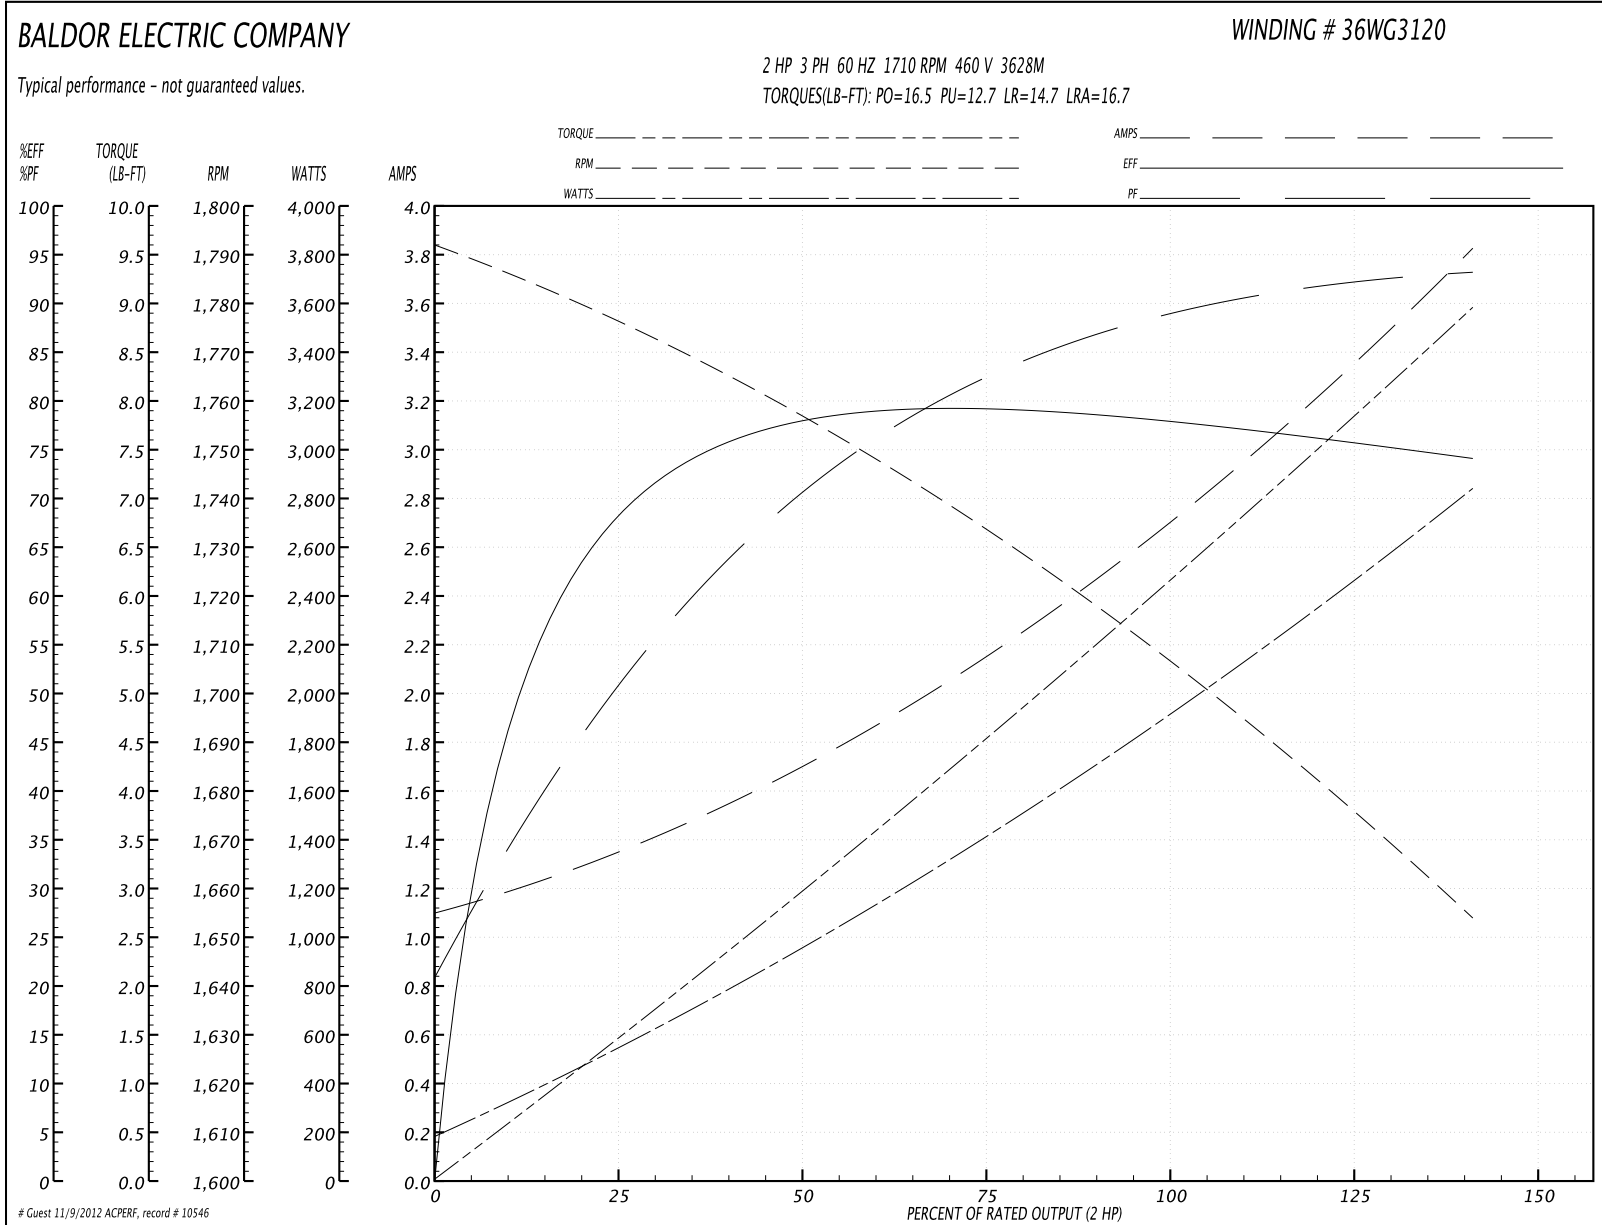

Performance Data at 460V, 60Hz, 0.89HP (Typical performance - Not guaranteed values)**General Characteristics**

Full Load Torque:	4.0 LB-FT	Start Configuration:	DOL
No-Load Current:	1.2 Amps	Break-Down Torque:	13.0 LB-FT
Line-line Res. @ 25°C.:	12.4 Ohms A Ph / 0.0 Ohms B Ph	Pull-Up Torque:	8.2 LB-FT
Temp. Rise @ Rated Load:	47 C	Locked-Rotor Torque:	8.7 LB-FT
Temp. Rise @ S.F. Load:	62 C	Starting Current:	8.9 Amps

Load Characteristics

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	39.0	50.0	61.0	68.0	75.0	79.0	72.0
Efficiency:	51.8	62.4	68.7	71.4	72.4	71.9	72.0
Speed:	1190.0	1182.0	1172.0	1163.0	1151.0	1134.0	1156.0
Line Amperes:	1.3	1.4	1.5	1.7	1.9	2.2	1.8

Performance Graph at 460V, 60Hz, 0.89HP Typical performance - Not guaranteed values

